

05/04/99
JCS71 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF EXPRESS MAILING

This transmittal and the documents and/or fees itemized hereon and attached hereto have been deposited as "Express Mail Post Office to Addressee" in accordance with 37 CFR §1.10 with Express Mailing Label Number **EL285395372US**.

Attorney Docket No. AND1P068

First Named Inventor:

GUYAN, G. Victor

JCS71 U.S. PTO
09/305234
05/04/99

UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR § 1.53(b))

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

☐ Duplicate for
fee processing

Sir: This is a request for filing a patent application under 37 CFR § 1.53(b) in the name of inventor:
G. Victor Guyan, Robert H. Pish and Carles Muntada

For: **METHOD AND ARTICLE OF MANUFACTURE FOR COMPONENT BASED TASK
HANDLING DURING CLAIM PROCESSING**

Application Elements:

- ☒ 192 Pages of Specification, Claims and Abstract
- ☒ 19 Sheets of Drawings
- ☐ ** Pages Combined Declaration and Power of Attorney

Accompanying Application Parts:

- ☐ Assignment and Assignment Recordation Cover Sheet (recording fee of **\$40.00** enclosed)
- ☐ 37 CFR 3.73(b) Statement by Assignee
- ☐ Information Disclosure Statement with Form PTO-1449
 - ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard
- ☒ Small Entity Statement(s)
- ☒ Other: **NO FEES ENCLOSED**

General Authorization for Petition for Extension of Time (37 CFR § 1.136)


☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR § 1.17 as may be needed to Deposit Account No. 50-0797 (Order No. AND1P068/AC990028).

☒ Please send correspondence to the following address:

HICKMAN STEPHENS & COLEMAN, LLP
P.O. Box 52037
Palo Alto, CA 94303-0746

Tel (650) 470-7430
Fax (650) 470-7440

Date: May 4, 1999



L. Keith Stephens
Registration No. 32,632

METHOD AND ARTICLE OF MANUFACTURE FOR COMPONENT BASED TASK HANDLING DURING CLAIM PROCESSING

5

FIELD OF THE INVENTION

The present invention relates to task management and more particularly to handling task during insurance claim processing utilizing a computer system.

10

BACKGROUND OF THE INVENTION

Computers have become a necessity in life today. They appear in nearly every office and household worldwide. A representative hardware environment is depicted in prior art Figure 1, which illustrates a typical hardware configuration of a workstation having a central processing unit **110**, such as a microprocessor, and a number of other units interconnected via a system bus **112**. The workstation shown in Figure 1 includes a Random Access Memory (RAM) **114**, Read Only Memory (ROM) **116**, an I/O adapter **118** for connecting peripheral devices such as disk storage units **120** to the bus **112**, a user interface adapter **122** for connecting a keyboard **124**, a mouse **126**, a speaker **128**, a microphone **132**, and/or other user interface devices such as a touch screen (not shown) to the bus **112**, communication adapter **134** for connecting the workstation to a communication network (e.g., a data processing network) and a display adapter **136** for connecting the bus **112** to a display device **138**. The workstation typically has resident thereon an operating system such as the Microsoft Windows NT or Windows/95 Operating System (OS), the IBM OS/2 operating system, the MAC OS, or UNIX operating system.

Object oriented programming (OOP) has become increasingly used to develop complex applications. As OOP moves toward the mainstream of software design

Object oriented programming (OOP) has become increasingly used to develop complex applications. As OOP moves toward the mainstream of software design and development, various software solutions require adaptation to make use of the benefits of OOP. A need exists for these principles of OOP to be applied to a messaging interface of an electronic messaging system such that a set of OOP classes and objects for the messaging interface can be provided.

OOP is a process of developing computer software using objects, including the steps of analyzing the problem, designing the system, and constructing the program. An object is a software package that contains both data and a collection of related structures and procedures. Since it contains both data and a collection of structures and procedures, it can be visualized as a self-sufficient component that does not require other additional structures, procedures or data to perform its specific task. OOP, therefore, views a computer program as a collection of largely autonomous components, called objects, each of which is responsible for a specific task. This concept of packaging data, structures, and procedures together in one component or module is called encapsulation.

In general, OOP components are reusable software modules which present an interface that conforms to an object model and which are accessed at run-time through a component integration architecture. A component integration architecture is a set of architecture mechanisms which allow software modules in different process spaces to utilize each others capabilities or functions. This is generally done by assuming a common component object model on which to build the architecture. It is worthwhile to differentiate between an object and a class of objects at this point. An object is a single instance of the class of objects, which is often just called a class. A class of objects can be viewed as a blueprint, from which many objects can be formed.

OOP allows the programmer to create an object that is a part of another object. For example, the object representing a piston engine is said to have a

composition-relationship with the object representing a piston. In reality, a piston engine comprises a piston, valves and many other components; the fact that a piston is an element of a piston engine can be logically and semantically represented in OOP by two objects.

5

OOP also allows creation of an object that “depends from” another object. If there are two objects, one representing a piston engine and the other representing a piston engine wherein the piston is made of ceramic, then the relationship between the two objects is not that of composition. A ceramic piston engine does not make up a piston engine. Rather it is merely one kind of piston engine that has one more limitation than the piston engine; its piston is made of ceramic. In this case, the object representing the ceramic piston engine is called a derived object, and it inherits all of the aspects of the object representing the piston engine and adds further limitation or detail to it. The object representing the ceramic piston engine “depends from” the object representing the piston engine. The relationship between these objects is called inheritance.

When the object or class representing the ceramic piston engine inherits all of the aspects of the objects representing the piston engine, it inherits the thermal characteristics of a standard piston defined in the piston engine class. However, the ceramic piston engine object overrides these ceramic specific thermal characteristics, which are typically different from those associated with a metal piston. It skips over the original and uses new functions related to ceramic pistons. Different kinds of piston engines have different characteristics, but may have the same underlying functions associated with it (e.g., how many pistons in the engine, ignition sequences, lubrication, etc.). To access each of these functions in any piston engine object, a programmer would call the same functions with the same names, but each type of piston engine may have different/overriding implementations of functions behind the same name. This ability to hide different implementations of a function behind the same name is called polymorphism and it greatly simplifies communication among objects.

With the concepts of composition-relationship, encapsulation, inheritance and polymorphism, an object can represent just about anything in the real world. In fact, the logical perception of the reality is the only limit on determining the kinds of things that can become objects in object-oriented software. Some typical categories are as follows:

- Objects can represent physical objects, such as automobiles in a traffic-flow simulation, electrical components in a circuit-design program, countries in an economics model, or aircraft in an air-traffic-control system.
- Objects can represent elements of the computer-user environment such as windows, menus or graphics objects.
- An object can represent an inventory, such as a personnel file or a table of the latitudes and longitudes of cities.
- An object can represent user-defined data types such as time, angles, and complex numbers, or points on the plane.

With this enormous capability of an object to represent just about any logically separable matters, OOP allows the software developer to design and implement a computer program that is a model of some aspects of reality, whether that reality is a physical entity, a process, a system, or a composition of matter. Since the object can represent anything, the software developer can create an object which can be used as a component in a larger software project in the future.

If 90% of a new OOP software program consists of proven, existing components made from preexisting reusable objects, then only the remaining 10% of the new software project has to be written and tested from scratch. Since 90% already came from an inventory of extensively tested reusable objects, the potential domain from which an error could originate is 10% of the program. As a result,

OOP enables software developers to build objects out of other, previously built objects.

This process closely resembles complex machinery being built out of assemblies and sub-assemblies. OOP technology, therefore, makes software engineering more like hardware engineering in that software is built from existing components, which are available to the developer as objects. All this adds up to an improved quality of the software as well as an increased speed of its development.

10

15

SUMMARY OF THE INVENTION

5 A computer program is provided for developing component based software capable of handling insurance-related tasks. The program includes a data component that stores, retrieves and manipulates data utilizing a plurality of functions. Also provided is a client component which includes an adapter component that transmits and receives data to/from the data component. The

10 client component also includes a business component that serves as a data cache and includes logic for manipulating the data. A controller component is also included which is adapted to handle events generated by a user utilizing the business component to cache data and the adapter component to ultimately persist data to a data repository. In use, the client component allows a user to define

15 tasks that achieve an insurance-related goal upon completion. In addition, the user is able to input rules which dictate which tasks should be selected based on a set of predetermined events. Events are then received from any source, such as a common event queue. Finally, tasks are selected and outputted based on the received events.

20

25

DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, aspects and advantages are better understood
5 from the following detailed description of a preferred embodiment of the
invention with reference to the drawings, in which:

Prior Art Figure **1** is a schematic diagram of the present invention; and

10 Figure **2A** is block diagram of one embodiment of the present invention.

Figure **2B** is a flowchart showing how components generally operate in
accordance with one embodiment of the present invention.

15 Figure **2C** is a flowchart showing how the UI Controller operates in accordance
with one embodiment of the present invention.

Figure **2D** is a flowchart showing the interactions between the CCA, the CCI, and
the Server Component in accordance with one embodiment of the present
20 invention.

Figure **3** shows the life cycle of a typical User Interface and the standard methods
that are part of the Window Processing Framework.

25 Figure **4** is an illustration showing how different languages are repainted and
recompiled.

Figure **5** is a block diagram of an Architecture Object.

30 Figure **6** is an illustration showing the physical layout of CodeDecode tables
according to one embodiment of the present invention.

Figure 7 is a logic diagram according to one embodiment of the present invention.

5 Figure 8 is a block diagram of the security framework and its components.

Figure 9 is an illustration showing the relationships between the security element and other elements.

10 Figure 10 is an illustration of the Negotiation component of one embodiment of the present invention;

Figure 11 is a flow diagram of the operations carried out by the Organization component of one embodiment of the present invention;

15

Figure 12 is an illustration of the Participant component of one embodiment of the present invention;

Figure 13 is a flow diagram of the operations carried out by the Task Assistant component of one embodiment of the present invention;

20

Figure 14 is an illustration of the Event Processor in combination with other components of the system in accordance with on embodiment of the present invention; and

25

Figure 15 is an illustration of the Task Engine in accordance with one embodiment of the present invention.

DISCLOSURE OF THE INVENTION

5 Programming languages are beginning to fully support the OOP principles, such
as encapsulation, inheritance, polymorphism, and composition-relationship. With
the advent of the C++ language, many commercial software developers have
embraced OOP. C++ is an OOP language that offers a fast, machine-executable
code. Furthermore, C++ is suitable for both commercial-application and
10 systems-programming projects. For now, C++ appears to be the most popular
choice among many OOP programmers, but there is a host of other OOP
languages, such as Smalltalk, Common Lisp Object System (CLOS), and Eiffel.
Additionally, OOP capabilities are being added to more traditional popular
computer programming languages such as Pascal.

15 The benefits of object classes can be summarized, as follows:

- Objects and their corresponding classes break down complex
programming problems into many smaller, simpler problems.
- Encapsulation enforces data abstraction through the organization of data
20 into small, independent objects that can communicate with each other.
Encapsulation protects the data in an object from accidental damage, but
allows other objects to interact with that data by calling the object's
member functions and structures.
- Subclassing and inheritance make it possible to extend and modify objects
25 through deriving new kinds of objects from the standard classes available
in the system. Thus, new capabilities are created without having to start
from scratch.
- Polymorphism and multiple inheritance make it possible for different
30 programmers to mix and match characteristics of many different classes
and create specialized objects that can still work with related objects in
predictable ways.

- Class hierarchies and containment hierarchies provide a flexible mechanism for modeling real-world objects and the relationships among them.
- Libraries of reusable classes are useful in many situations, but they also have some limitations. For example:
 - Complexity. In a complex system, the class hierarchies for related classes can become extremely confusing, with many dozens or even hundreds of classes.
 - Flow of control. A program written with the aid of class libraries is still responsible for the flow of control (i.e., it must control the interactions among all the objects created from a particular library). The programmer has to decide which functions to call at what times for which kinds of objects.
 - Duplication of effort. Although class libraries allow programmers to use and reuse many small pieces of code, each programmer puts those pieces together in a different way. Two different programmers can use the same set of class libraries to write two programs that do exactly the same thing but whose internal structure (i.e., design) may be quite different, depending on hundreds of small decisions each programmer makes along the way. Inevitably, similar pieces of code end up doing similar things in slightly different ways and do not work as well together as they should.

Class libraries are very flexible. As programs grow more complex, more programmers are forced to reinvent basic solutions to basic problems over and over again. A relatively new extension of the class library concept is to have a framework of class libraries. This framework is more complex and consists of significant collections of collaborating classes that capture both the small scale patterns and major mechanisms that implement the common requirements and design in a specific application domain. They were first developed to free application programmers from the chores involved in displaying menus,

windows, dialog boxes, and other standard user interface elements for personal computers.

Frameworks also represent a change in the way programmers think about the
5 interaction between the code they write and code written by others. In the early
days of procedural programming, the programmer called libraries provided by the
operating system to perform certain tasks, but basically the program executed
down the page from start to finish, and the programmer was solely responsible
for the flow of control. This was appropriate for printing out paychecks,
10 calculating a mathematical table, or solving other problems with a program that
executed in just one way.

The development of graphical user interfaces began to turn this procedural
programming arrangement inside out. These interfaces allow the user, rather than
15 program logic, to drive the program and decide when certain actions should be
performed. Today, most personal computer software accomplishes this by means
of an event loop which monitors the mouse, keyboard, and other sources of
external events and calls the appropriate parts of the programmer's code
according to actions that the user performs. The programmer no longer
20 determines the order in which events occur. Instead, a program is divided into
separate pieces that are called at unpredictable times and in an unpredictable
order. By relinquishing control in this way to users, the developer creates a
program that is much easier to use. Nevertheless, individual pieces of the
program written by the developer still call libraries provided by the operating
25 system to accomplish certain tasks, and the programmer must still determine the
flow of control within each piece after it's called by the event loop. Application
code still "sits on top of" the system.

Even event loop programs require programmers to write a lot of code that should
30 not need to be written separately for every application. The concept of an
application framework carries the event loop concept further. Instead of dealing

with all the nuts and bolts of constructing basic menus, windows, and dialog boxes and then making these things all work together, programmers using application frameworks start with working application code and basic user interface elements in place. Subsequently, they build from there by replacing
5 some of the generic capabilities of the framework with the specific capabilities of the intended application.

Application frameworks reduce the total amount of code that a programmer has to write from scratch. However, because the framework is really a generic
10 application that displays windows, supports copy and paste, and so on, the programmer can also relinquish control to a greater degree than event loop programs permit. The framework code takes care of almost all event handling and flow of control, and the programmer's code is called only when the framework needs it (e.g., to create or manipulate a proprietary data structure).

15 A programmer writing a framework program not only relinquishes control to the user (as is also true for event loop programs), but also relinquishes the detailed flow of control within the program to the framework. This approach allows the creation of more complex systems that work together in interesting ways, as
20 opposed to isolated programs, having custom code, being created over and over again for similar problems.

Thus, as is explained above, a framework basically is a collection of cooperating classes that make up a reusable design solution for a given problem domain. It
25 typically includes objects that provide default behavior (e.g., for menus and windows), and programmers use it by inheriting some of that default behavior and overriding other behavior so that the framework calls application code at the appropriate times.

30 There are three main differences between frameworks and class libraries:

- Behavior versus protocol. Class libraries are essentially collections of behaviors that you can call when you want those individual behaviors in your program. A framework, on the other hand, provides not only behavior but also the protocol or set of rules that govern the ways in which behaviors can be combined, including rules for what a programmer is supposed to provide versus what the framework provides.
- Call versus override. With a class library, the code the programmer instantiates objects and calls their member functions. It's possible to instantiate and call objects in the same way with a framework (i.e., to treat the framework as a class library), but to take full advantage of a framework's reusable design, a programmer typically writes code that overrides and is called by the framework. The framework manages the flow of control among its objects. Writing a program involves dividing responsibilities among the various pieces of software that are called by the framework rather than specifying how the different pieces should work together.
- Implementation versus design. With class libraries, programmers reuse only implementations, whereas with frameworks, they reuse design. A framework embodies the way a family of related programs or pieces of software work. It represents a generic design solution that can be adapted to a variety of specific problems in a given domain. For example, a single framework can embody the way a user interface works, even though two different user interfaces created with the same framework might solve quite different interface problems.

25

Thus, through the development of frameworks for solutions to various problems and programming tasks, significant reductions in the design and development effort for software can be achieved. A preferred embodiment of the invention utilizes HyperText Markup Language (HTML) to implement documents on the Internet together with a general-purpose secure communication protocol for a transport medium between the client and the Newco. HTTP or other protocols

30

could be readily substituted for HTML without undue experimentation.

Information on these products is available in T. Berners-Lee, D. Connolly, "RFC

1866: Hypertext Markup Language - 2.0" (Nov. 1995); and R. Fielding, H,

Frystyk, T. Berners-Lee, J. Gettys and J.C. Mogul, "Hypertext Transfer Protocol

5 -- HTTP/1.1: HTTP Working Group Internet Draft" (May 2, 1996). HTML is a
simple data format used to create hypertext documents that are portable from one
platform to another. HTML documents are SGML documents with generic
semantics that are appropriate for representing information from a wide range of
domains. HTML has been in use by the World-Wide Web global information
10 initiative since 1990. HTML is an application of ISO Standard 8879; 1986
Information Processing Text and Office Systems; Standard Generalized Markup
Language (SGML).

To date, Web development tools have been limited in their ability to create

15 dynamic Web applications which span from client to server and interoperate with
existing computing resources. Until recently, HTML has been the dominant
technology used in development of Web-based solutions. However, HTML has
proven to be inadequate in the following areas:

- Poor performance;
- 20 • Restricted user interface capabilities;
- Can only produce static Web pages;
- Lack of interoperability with existing applications and data; and
- Inability to scale.

25 Sun Microsystem's Java language solves many of the client-side problems by:

- Improving performance on the client side;
- Enabling the creation of dynamic, real-time Web applications; and
- Providing the ability to create a wide variety of user interface
components.

30

With Java, developers can create robust User Interface (UI) components. Custom "widgets" (e.g., real-time stock tickers, animated icons, etc.) can be created, and client-side performance is improved. Unlike HTML, Java supports the notion of client-side validation, offloading appropriate processing onto the client for improved performance. Dynamic, real-time Web pages can be created. Using the above-mentioned custom UI components, dynamic Web pages can also be created.

Sun's Java language has emerged as an industry-recognized language for "programming the Internet." Sun defines Java as: "a simple, object-oriented, distributed, interpreted, robust, secure, architecture-neutral, portable, high-performance, multithreaded, dynamic, buzzword-compliant, general-purpose programming language. Java supports programming for the Internet in the form of platform-independent Java applets." Java applets are small, specialized applications that comply with Sun's Java Application Programming Interface (API) allowing developers to add "interactive content" to Web documents (e.g., simple animations, page adornments, basic games, etc.). Applets execute within a Java-compatible browser (e.g., Netscape Navigator) by copying code from the server to client. From a language standpoint, Java's core feature set is based on C++. Sun's Java literature states that Java is basically, "C++ with extensions from Objective C for more dynamic method resolution."

Another technology that provides similar function to JAVA is provided by Microsoft and ActiveX Technologies, to give developers and Web designers wherewithal to build dynamic content for the Internet and personal computers. ActiveX includes tools for developing animation, 3-D virtual reality, video and other multimedia content. The tools use Internet standards, work on multiple platforms, and are being supported by over 100 companies. The group's building blocks are called ActiveX Controls, small, fast components that enable developers to embed parts of software in hypertext markup language (HTML) pages. ActiveX Controls work with a variety of programming languages

including Microsoft Visual C++, Borland Delphi, Microsoft Visual Basic programming system and, in the future, Microsoft's development tool for Java, code named "Jakarta." ActiveX Technologies also includes ActiveX Server Framework, allowing developers to create server applications. One of ordinary skill in the art readily recognizes that ActiveX could be substituted for JAVA without undue experimentation to practice the invention.

Detailed Description

One embodiment of the present invention is a server based framework utilizing component based architecture. Referring to Figure 2A, one embodiment of the present invention includes an Architecture Object 200, an Application Object 202, a User Interface Form 204, a User Interface Controller 206, a Client Component Adapter 208, a COM Component Interface 210, and a Server Component 222.

In general, the components of the present invention operate as shown in Figure 2B. In step 230, data is stored in an object of the component. In step 232, functions which manipulate the object are encapsulated with the object data. Later, in step 234, the stored object data can be manipulated by other components utilizing the functions of step 232.

Architecture Object

The Architecture Object 200 provides an easy-to-use object model that masks the complexity of the architecture on the client. The Architecture Object 200 provides purely technical services and does not contain any business logic or functional code. It is used on the client as the single point of access to all architecture services.

On the server side, the Architecture Object 200 is supplemented by a set of global functions contained in standard VB modules

The Architecture Object 200 is responsible for providing all client architecture services (i.e., codes table access, error logging, etc.), and a single point of entry for architecture services. The Architecture Object 200 is also responsible for
5 allowing the architecture to exist as an autonomous unit, thus allowing internal changes to be made to the architecture with minimal impact to application.

The Architecture Object 200 provides a code manager, client profile, text manager, ID manager, registry manager, log manager, error manager, and a
10 security manager. The codes manager reads codes from a local database on the client, marshals the codes into objects, and makes them available to the application. The client profile provides information about the current logged-in user. The text manager provides various text manipulation services such as search and replace. The ID manager generates unique IDs and timestamps. The
15 registry manager encapsulates access to the system registry. The log manager writes error or informational messages to the message log. The error manager provides an easy way to save and re-raise an error. And the security manager determines whether or not the current user is authorized to perform certain actions.

20

Application Object

The Application Object 202 has a method to initiate each business operation in the application. It uses late binding to instantiate target UI controllers in order to
25 provide autonomy between windows. This allows different controllers to use the Application Object 202 without statically linking to each and every UI controller in the application.

When opening a UI controller, the Application Object 202 calls the architecture
30 initialization, class initialization, and form initialization member functions.

The Application Object 202 keeps a list of every active window, so that it can shut down the application in the event of an error. When a window closes, it tells the Application Object 202, and is removed from the Application Object's 202 list of active windows.

5

The Application Object 202 is responsible for instantiating each UI Controller 206, passing data / business context to the target UI Controller 206, and invoking standard services such as initialize controller, initializing Form and Initialize Architecture. The Application Object 202 also keeps track of which windows are active so that it can coordinate the shutdown process.

10

UI Form

The UI form's 204 primary responsibility is to forward important events to its controller 206. It remains mostly unintelligent and contains as little logic as possible. Most event handlers on the form simply delegate the work by calling methods on the form's controller 206.

15

The UI form 204 never enables or disables its own controls, but ask its controller 206 to do it instead. Logic is included on the UI form 204 only when it involves very simple field masking or minor visual details.

20

The UI form 204 presents an easy-to-use, graphical interface to the user and informs its controller 206 of important user actions. The UI form 204 may also provide basic data validation (e.g., data type validation) through input masking. In addition, the UI form is responsible for intelligently resizing itself, launching context-sensitive help, and unload itself.

25

User Interface Controller

Every UI Controller 206 includes a set of standard methods for initialization, enabling and disabling controls on its UI form 204, validating data on the form, getting data from the UI form 204, and unloading the UI form 204.

30

UI Controllers 206 contain the majority of logic to manipulate Business Objects 207 and manage the appearance of its UI form 204. If its form is not read-only, the UI Controller 206 also tracks whether or not data on the UI form 204 has changed, so as to avoid unnecessary database writes when the user decides to save. In addition, controllers of auxiliary windows (like the File-Save dialog box in Microsoft Word), keep track of their calling UI controller 206 so that they can notify it when they are ready to close.

Figure 2C is a flowchart showing how the UI Controller operates in one embodiment of the present invention. In step 236, data is entered in a UI form by a user. In step 238, the UI controller interprets the data entered into the UI form. In step 240, the UI controller places the appropriate data into a Business Object to be utilized and retrieved later.

A UI Controller 206 defines a Logical Unit of Work (LUW). If an LUW involves more than one UI Controller 206, the LUW is implemented as a separate object.

The UI Controller 206 is responsible for handling events generated by the user interacting with the UI form 204 and providing complex field validation and cross field validation within a Logical Unit of Work. The UI Controller 206 also contains the logic to interact with business objects 207, and creates new business objects 207 when necessary. Finally, the UI Controller 206 interacts with Client Component Adapters 208 to add, retrieve, modify, or delete business objects 207, and handles all client-side errors.

Business Objects

The Business Object's (BO) 207 primary functionality is to act as a data holder, allowing data to be shared across User Interface Controllers 206 using an object-based programming model.

BOs 207 perform validation on their attributes as they are being set to maintain the integrity of the information they contain. BOs 207 also expose methods other than accessors to manipulate their data, such as methods to change the life cycle state of a BO 207 or to derive the value of a calculated attribute.

In many cases, a BO 207 will have its own table in the database and its own window for viewing or editing operations.

Business Objects 207 contain information about a single business entity and maintain the integrity of that information. The BO 207 encapsulates business rules that pertain to that single business entity and maintains relationships with other business objects (e.g., a claim contains a collection of supplements). Finally, the BO 207 provides additional properties relating to the status of the information it contains (such as whether that information has changed or not), provides validation of new data when necessary, and calculates attributes that are derived from other attributes (such as Full Name, which is derived from First Name, Middle Initial, and Last Name).

Client Component Adapters

Client Component Adapters (CCAs) 208 are responsible for retrieving, adding, updating, and deleting business objects in the database. CCAs 208 hide the storage format and location of data from the UI controller 206. The UI controller 206 does not care about where or how objects are stored, since this is taken care of by the CCA 208.

The CCA 208 marshals data contained in recordsets returned by the server into business objects 207. CCAs 208 masks all remote requests from UI Controller 206 to a specific component, and act as a “hook” for services such as data compression, and data encryption.

COM Component Interface

A COM Component Interface (CCI) 210 is a “contract” for services provided by a component. By “implementing” an interface (CCI) 210, a component is promising to provide all the services defined by the CCI 20.

5

The CCI 210 is not a physical entity (which is why it is depicted with a dotted line). It’s only reason for existence is to define the way a component appears to other objects. It includes the signatures or headers of all the public properties or methods that a component will provide.

10

To implement a CCI 210, a server component exposes a set of specially named methods, one for each method defined on the interface. These methods should do nothing except delegate the request to a private method on the component which will do the real work.

15

The CCI 210 defines a set of related services provided by a component. The CCI allows any component to “hide” behind the interface to perform the services defined by the interface by “implementing” the interface.

Server Component

Server components 222 are course grained and transaction oriented. They are designed for maximum efficiency.

25

Server Components 222 encapsulate all access to the database, and define business transaction boundaries. In addition, Server Components 222 are responsible for ensuring that business rules are honored during data access operations.

30

A Server Component 222 performs data access operations on behalf of CCAs 208 or other components and participates in transactions spanning server components 222 by communicating with other server components 222. The

Server Component 222 is accessible by multiple front end personalities (e.g., Active Server Pages), and contains business logic designed to maintain the integrity of data in the database.

- 5 Figure 2D is a flowchart showing the interactions between the CCA, the CCI, and the Server Component in accordance with one embodiment of the present invention. In step 242, a request is made to place client created data on the server database. In step 244, the data is transferred to the server component 222 utilizing a CCI 210. In step 246, the server component 222 stores the data in the
10 server database.

BUSINESS RULE PLACEMENT

15 Overview

The distribution of business rules across tiers of the application directly affects the robustness and performance of the system as a whole. Business rules can be categorized into the following sections: Relationships, Calculations, and Business Events.

20 Relationships between Business Objects

Business Objects 207 are responsible for knowing other business objects 207 with which they are associated.

- Relationships between BOs 207 are built by the CCA 208 during the marshaling
25 process. For example, when a CCA 208 builds a claim BO 207, it will also build the collection of supplements if necessary.

Calculated Business Data

Business rules involving calculations based on business object 207 attributes are coded in the business objects 207 themselves. Participant Full Name is a good

example of a calculated attribute. Rather than force the controllers to concatenate the first name, middle initial, and last name every time they wanted to display the full name, a calculated attribute that performs this logic is exposed on the business object. In this way, the code to compose the full name only has to be written once and can be used by many controllers 206.

Another example of a calculated attribute is the display date of a repeating task. When a task with a repeat rule is completed, a new display date must be determined. This display date is calculated based on the date the task was completed, and the frequency of repetition defined by the repeat rule. Putting the logic to compute the new display date into the Task BO 207 ensures that it is coded only once.

Responses to Business Events

Business rules that relate to system events and involve no user interaction are enforced on the server components.

Completion of a task is a major event in the system. When a task is completed, the system first ensures that the performer completing the task is added to the claim. Then, after the task is marked complete in the database, it is checked to see if the task has a repeat rule. If so, another task is created and added to the database. Finally, the event component is notified, because the Task Engine may need to react to the task completion.

Consider the scenario if the logic to enforce this rule were placed on the UI controller 206.

The controller 206 calls the Performer Component to see if the performer completing the task has been added to the claim. If the performer has not been added to the claim, then the controller 206 calls the performer component again to add them.

Next, the controller 206 calls the Task Component to mark the task complete in the database. If the task has a repeat rule, the controller 206 computes the date the task is to be redisplayed and calls the Task Component again to add a new task. Lastly, the controller 206 calls the Event Component to notify the Task Engine of the task completion.

The above implementation requires five network round trips in its worst case. In addition, any other controller 206 or server component 222 that wants to complete a task must code this logic all over again. Enforcing this rule in the task server component 222 reduces the number of network round trips and eliminates the need to code the logic more than once.

Responses to User Events

All responses to user events are coordinated by the controller 206. The controller 206 is responsible for actions such as enabling or disabling controls on its form, requesting authorization from the security component, or making calls to the CCA 208.

Authorization

All logic for granting authorization is encapsulated inside the security component. Controllers 206 and components 222 must ask the security component if the current user is authorized to execute certain business operations in the system. The security component will answer yes or no according to some predefined security logic.

Summary

| Type of Business Rule | Example | Responsibility |
|---------------------------------------|--|------------------|
| Maintaining relationships between BOs | Claim keeps a collection of supplements | Business Objects |
| Building relationships between BOs | CCA builds the claim's collection of supplements | CCAs |
| Calculated Business Data | Participant calculates its full name | Business Objects |
| Responses to Business | Task Component collaborates with other | Components |

| Events | components | |
|--------------------------|---|----------------------------|
| Requesting Authorization | Task Library controller asks the security component if the current user is allowed to access Task Library | Controllers and Components |
| Granting Authorization | Security component determines whether or not the current user can access Task Library | Security Component |

WINDOW PROCESSING FRAMEWORK

5

The Default Window Framework provides default window processing for each window contained within the system. This default processing aides the developer in developing robust, maintainable UIs, standardizes common processes (such as form initialization) and facilitates smooth integration with architecture services.

10

Figure 3 shows the life cycle of a typical User Interface and the standard methods that are part of the Window Processing Framework 300.

The Window Processing Framework 300 encompasses the following:

15

- Window Initialization 302;
- Window Save Processing 304;
- Window Control State Management 306;
- Window Data Validation 308;
- Window Shutdown Processing 310.

20

Window Initialization Processing 302: After creating a controller 206 for the desired window, the App object 202 calls a set of standard initialization functions on the controller 206 before the form 204 is displayed to the user. Standardizing these functions makes the UIs more homogeneous throughout the application,

25

while promoting good functional decomposition.

Window Save Processing 304: Any time a user updates any form text or adds an item to a ListBox, the UI Controller 206 marks the form as “dirty”. This allows the UI controller 206 to determine whether data has changed when the form closes and prompt the user to commit or lose their changes.

5

Window Control State Management 306: Enabling and disabling controls and menu options is a very complex part of building a UI. The logic that modifies the state of controls is encapsulated in a single place for maintainability.

10

Window Data Validation 308: Whenever data changes on a form, validation rules can be broken. The controller is able to detect those changes, validate the data, and prompt the user to correct invalid entries.

15

Window Shutdown Processing 310: The Window Shutdown framework provides a clear termination path for each UI in the event of an error. This reduces the chance of memory leaks, and General Protection failures.

20

Benefits

25

Standardized Processing: Standardizing the window processing increases the homogeneity of the application. This ensures that all windows within the application behave in a consistent manner for the end users, making the application easier to use. It also shortens the learning curve for developers and increases maintainability, since all windows are coded in a consistent manner.

30

Simplified Development: Developers can leverage the best practices documented in the window processing framework to make effective design and coding decisions. In addition, a shell provides some “canned” code that gives developers a head start during the coding effort.

Layered Architecture: Because several architecture modules provide standardized processing to each application window, the core logic can be changed for every system window by simply making modifications to a single procedure.

5

Window Initialization 302

To open a new window, the App Object 202 creates the target window's controller 206 and calls a series of methods on the controller 206 to initialize it. The calling of these methods, ArchInitClass, InitClass, InitForm, and ShowForm, is illustrated below.

10

ArchInitClass

The main purpose of the ArchInitClass function is to tell the target controller 206 who is calling it. The App Object 202 "does the introductions" by passing the target controller 206 a reference to itself and a reference to the calling controller 206. In addition, it serves as a hook into the controller 206 for adding architecture functionality in the future.

15

20

```
Public Sub ArchInitClass(objApp As Object, objCallingCTRL As
Object)
    ' remember who called me
    Set m_objApp = objApp
    Set m_objCallingCTRL = objCallingCTRL
End Sub
```

25

InitClass

This function provides a way for the App Object 202 to give the target controller 206 any data it needs to do its processing. It is at this point that the target controller 206 can determine what "mode" it is in. Typical form modes include, add mode, edit mode, and view mode. If the window is in add mode, it creates a new BO 207 of the appropriate type in this method.

30

```
Public Sub InitClass(colPrevSelection As CArchCollection)
    If colPrevSelection Is Nothing Then
        ' no accounts were previously selected
```

```

        Set m_colPrevSelection = New CArchCollection
        Set m_colNewSelection = New CArchCollection
    Else
        ' some accounts may have already been selected
5      Set m_colPrevSelection = colPrevSelection
        Set m_colNewSelection = colPrevSelection.Clone()
    End If

    Set m_colResults = New CArchCollection
10
    DetermineFormMode()
End Sub

```

InitForm

The InitForm procedure of each controller 206 coordinates any initialization of

15 the form 204 before it is displayed. Because initialization is often a multi-step process, InitForm creates the window and then delegates the majority of the initialization logic to helper methods that each have a single purpose, in order to follow the rules of good functional decomposition. For example, the logic to determine a form's 204 state based on user actions and relevant security

20 restrictions and move to that state is encapsulated in the DetermineFormState method.

```

Public Sub InitForm()
    ' create my form
25   Set m_frmCurrentForm = New frmAccountSearch
    ' figure out the state of my form based on arguments I
    received in InitClass and
    ' enable/disable the appropriate controls
    DetermineFormState()
30   ' fill my form with data
    PopulateForm()
End Sub

```

PopulateForm

35 PopulateForm is a private method responsible for filling the form with data during initialization. It is called exactly once by the InitForm method.

PopulateForm is used to fill combo boxes on a form 204, get the details of an object for an editing window, or display objects that have already been selected by the user, as in the following example.

```

Private Sub PopulateForm()
    Dim acct As CAccount
    Dim item As GTListItem

5      ' display any accounts already selected by the user
      ' create and add a ListItem for every Account in the
      previous selection collection
      With frmCurrentForm.lvwResults.ListItems
          .Clear
10      For Each acct In m_colPrevSelection
          Set item = .Add(, acct.Number, acct.Number)
          item.SubItems(1) = acct.Name
          Next
      End With
15  End Sub

```

ShowForm

The ShowForm method simply centers and displays the newly initialized form 204.

```

20  Public Sub ShowForm()
      ' center my form
      frmCurrentForm.Move(Screen.Width - frmCurrentForm.Width) /
24  2, _
      (Screen.Height - frmCurrentForm.Height)
25  / 2
      ' display my form
      frmCurrentForm.Show vbModal .
30  End Sub

```

Window Control State Management 306

It is often necessary to enable or disable controls on a form 204 in response to user actions. This section describes the patterns employed by the Component
35 Based Architecture for MTS (CBAM) to manage this process effectively.

Form Mode

It is helpful to distinguish between form mode and form state. Form mode indicates the reason the form 204 has been invoked. Often, forms 204 are used for more than one purpose. A common example is the use of the same form to
40 view, add, and edit a particular type of object, such as a task or a claim. In this case, the form's modes would include View, Add, and Update.

The modes of a form 204 are also used to comply with security restrictions based on the current user's access level. For example, Task Library is a window that limits access to task templates based on the current user's role. It might have a Librarian mode and a Non-Librarian mode to reflect the fact that a non-librarian user cannot be allowed to edit task templates. In this way, modes help to enforce the requirement that certain controls on the form 204 remain disabled unless the user has a certain access level.

- 10 It is not always necessary for a form 204 to have a mode; a form might be so simple that it would have only one mode – the default mode. In this case, even though it is not immediately necessary, it may be beneficial to make the form “mode-aware” so that it can be easily extended should the need arise.

Form State

- 15 A form 204 will have a number of different states for each mode, where a state is a unique combination of enabled/disabled, visible/invisible controls. When a form 204 moves to a different state, at least one control is enabled or disabled or modified in some way.
- 20 A key difference between form mode and form state is that mode is determined when the controller 206 is initialized and remains constant until the controller 206 terminates. State is determined when the window initializes, but is constantly being reevaluated in response to user actions.

Handling UI Events

- 25 When the value of a control on the form 204 changes, it is necessary to reevaluate the state of the controls on the form (whether or not they are enabled/disabled or visible/invisible, etc.). If changing the value of one control could cause the state of a second control to change, an event handler is written for the appropriate event of the first control.

The following table lists common controls and the events that are triggered when their value changes.

| Control | Event |
|---------------|--------|
| TextBox | Change |
| ComboBox | Change |
| ListBox | Click |
| CheckBox | Click |
| Option Button | Click |

5

The event handler calls the `DetermineFormState` method on the controller 206.

Setting the State of Controls

It is essential for maintainability that the process of setting the state of controls be separate from the process for setting the values of those controls. The

10

`DetermineFormState` method on the controller 206 forces this separation between setting the state of controls and setting their values.

`DetermineFormState` is the only method that modifies the state of any of the controls on the form 204. Because control state requirements are so complex and vary so widely, this is the only restriction made by the architecture framework.

15

If necessary, parameters are passed to the `DetermineFormState` function to act as “hints” or “clues” for determining the new state of the form 204. For complex forms, it is helpful to decompose the `DetermineFormState` function into a number of helper functions, each handling a group of related controls on the form or moving the form 204 to a different state.

20

Example

The Edit/Add/View Task Window has three modes: Edit, Add, and View. In Add mode, everything on the form is editable. Some details will stay disabled when in Edit mode, since they should be set only once when the task is added. In both Add and Edit modes, the repeat rule may be edited. Enabling editing of the repeat rule always disables the manual editing of the task's due and display dates. In View mode, only the Category combo box and Private checkbox are enabled.

```
10      ' Edit/Add/View Task Form
      Private Sub txtName_Change()
          myController.DetermineFormState
      End Sub

15      ' Edit/Add/View Task Controller
      Public Sub DetermineFormState()
          On Error Goto ErrorHandler
          Select Case m_nFormMode
              ' In Edit Mode, enable only "editable" details and
20          Repeat Rule editing if necessary
              Case cmFormModeEdit
                  EnableAddDetails False
                  EnableEditDetails True
                  EnableViewDetails True
25          If m_frmCurrentForm.chkRepetetiveTask.Checked Then
                  EnableEditRepeatRule True
                  EnableEditDisplayDueDates False
              Else
                  EnableEditRepeatRule False
30          EnableEditDisplayDueDates True
              End If
              If m_nFormDirty Then EnableSave True Else
                  EnableSave False
              ' In Add Mode, enable all details and Repeat Rule
35          editing if necessary
              Case cmFormModeAdd
                  EnableAddDetails True
                  EnableEditDetails True
                  EnableViewDetails True
40          If m_frmCurrentForm.chkRepetetiveTask.Checked Then
                  EnableEditRepeatRule True
                  EnableEditDisplayDueDates False
              Else
                  EnableEditRepeatRule False
45          EnableEditDisplayDueDates True
              End If
```

```

        If m_nFormDirty Then EnableSave True Else
EnableSave False
    ' In View Mode, disable everything except a few
5   details
        Case cmFormModeView
            EnableAddDetails False
            EnableEditDetails False
            EnableViewDetails True
            EnableEditRepeatRule False
10         EnableEditDisplayDueDates False
            EnableSave False
        Case Else
        End Select
        Exit Sub
15   ErrorHandler:
        ' error handling
        End Sub

20   ' Edit/Add/View Task Controller
Private Sub EnableAddDetails(bYesNo As Boolean)
        On Error Goto ErrorHandler
        ' Enable or disable controls that should be available only
        when the task is being added.
25         With frmCurrentForm
            .Name.Enabled = bYesNo
            .Description.Enabled = bYesNo
            .Type.Enabled = bYesNo
            .Level.Enabled = bYesNo
30         .Source.Enabled = bYesNo
        End With
        Exit Sub
        ErrorHandler:
        ' error handling logic
35   End Sub

```

Window Data Validation 308

Window data validation is the process by which data on the window is examined
40 for errors, inconsistencies, and proper formatting. It is important, for the sake of
consistency, to implement this process similarly or identically in all windows of
the application.

Types of Validation

Input Masking

Input masking is the first line of defense. It involves screening the data (usually character by character) as it is entered, to prevent the user from even entering

- 5 invalid data. Input masking may be done programmatically or via a special masked text box, however the logic is always located on the form, and is invoked whenever a masked field changes.

Single-Field Range Checking

- 10 Single-field range checking determines the validity of the value of one field on the form by comparing it with a set of valid values. Single-field range checking may be done via a combo box, spin button, or programmatically on the form, and is invoked whenever the range-checked field changes.

Cross-Field Validation

Cross-field validation compares the values of two or more fields to determine if a validation rule is met or broken, and occurs just before saving (or searching).

Cross-field validation may be done on the Controller 206 or the Business Object 207, however it is preferable to place the logic on the Business Object 207 when

- 20 the validation logic can be shared by multiple Controllers 206.

Invalid data is caught and rejected as early as possible during the input process.

Input masking and range checking provide the first line of defense, followed by cross-field validation when the window saves (or searches).

Single-Field Validation

All single-field validation is accomplished via some sort of input masking.

Masks that are attached to textboxes are used to validate the type or format of data being entered. Combo boxes and spin buttons may also be used to limit the user to valid choices. If neither of these are sufficient, a small amount of logic

- 30 may be placed on the form's event handler to perform the masking functionality,

such as keeping a value below a certain threshold or keeping apostrophes out of a textbox.

Cross-Field Validation

When the user clicks OK or Save, the form calls the `IsFormDataValid` on the controller to perform cross-field validation (e.g., verifying that a start date is less than an end date). If the business object 207 contains validation rules, the controller 206 may call a method on the business object 207 to make sure those rules are not violated.

If invalid data is detected by the controller 206, it will notify the user with a message box and, if possible, indicate which field or fields are in error. Under no circumstances will the window perform validation when the user is trying to cancel.

Example

```

15      ' Generic Edit Form
      Private Sub cmdOK_Click()
          On Error Goto ErrorHandler
          ' shut down if my data is valid.
          ' saving/canceling will occur in my controller's
20      QueryUnload function
          If IsFormDataValid Then Unload Me
          Exit Sub
      ErrorHandler:
25      Err.Raise Err.Number
      End Sub

      Public Function IsFormDataValid() As Boolean
          On Error Goto ErrorHandler
30
          ' assume success
          IsFormDataValid = True

          ' evaluate all validation rules
35      With frmCurrentForm
          ' make sure start date is earlier than end date
          If .txtStartDate.Text > .txtEndDate.Text Then
              IsFormDataValid = False
              MsgBox cmMsgInvalidEndDate
40              .txtEndDate.SetFocus
          ElseIf ...
    
```

```
        ' more validation rules
    End If
End With

5      Exit Function
      ErrorHandler:
        ' error handling logic
End Function
```

10

Window Save Processing 304

Window “Save Processing” involves tracking changes to data on a form 204 and responding to save and cancel events initiated by the user.

Tracking Changes to Form Data

15 Each window within the CBAM application contains a field within its corresponding control object known as the dirty flag. The dirty flag is set to True whenever an end user modifies data within the window. This field is interrogated by the UI Controller 206 to determine when a user should be prompted on Cancel or if a remote procedure should be invoked upon window close.

20

The application shell provides standard processing for each window containing an OK or Save button.

Saving

25 The default Save processing is implemented within the UI Controller 206 as follows:

The UI Controller is Notified that the OK button has been clicked. Then the controller 206 checks its Dirty Flag. If flag is dirty, the controller 206 calls the InterrogateForm method to retrieve data from the form 204 and calls a server
30 component 222 to store the business object 207 in the database. If the Dirty Flag is not set, then no save is necessary. The window is then closed.

Canceling

When the user cancels a window, the UI Controller 206 immediately examines the Dirty Flag. If the flag is set to true, the user is prompted that their changes will be lost if they decide to close the window.

5

Once prompted, the user can elect to continue to close the window and lose their changes or decide not to close and continue working.

10

Window Shutdown Processing 310

In the event of an error, it is sometimes necessary to shutdown a window or to terminate the entire application. It is critical that all windows follow the shutdown process in order to avoid the GPFs commonly associated with terminating incorrectly. Following is how the window/application is shutdown.

15

Shutdown Scope

The scope of the shutdown is as small as possible. If an error occurs in a controller 206 that does not affect the rest of the application, only that window is shut down. If an error occurs that threatens the entire application, there is a way to quickly close every open window in the application. The window shutdown strategy is able to accommodate both types of shutdowns.

20

Shutdown

In order to know what windows must be shut down, the architecture tracks which windows are open. Whenever the App Object 202 creates a controller 206, it calls its RegCTRLR function to add the controller 206 to a collection of open controllers. Likewise, whenever a window closes, it tells the App Object 202 that it is closing by calling the App Object's 202 UnRegCTRLR function, and the App Object 202 removes the closing controller 206 from its collection. In the case of an error, the App Object 202 loops through its collection of open controllers, telling each controller to "quiesce" or shutdown immediately.

GeneralErrorHandler

The GeneralErrorHandler is a method in MArch.bas that acts as the point of entry into the architecture's error handling mechanism. A component or a controller will call the GeneralErrorHandler when they encounter any type of unexpected or unknown error. The general error handler will return a value indicating what the component or controller should do: (1) resume on the line that triggered the error (2) resume on the statement after the line that triggered the error (3) exit the function (4) quiesce (5) shutdown the entire application.

```

ErrorHandler:
20     Select Case CStr(Err.Number)
        ' handle a search with no result error
        Case cmErrNoClaimTreeData
            MsgBox cmMsgNoResultsQuery, vbInformation
            frmCurrentForm.StatusBar.Panels(1) =
25     cmNoResultsQuery
            'Sets mouse pointer back to default
            frmCurrentForm.MousePointer = vbDefault
        Case Else
            Dim nResumeCode As Integer
            nResumeCode =
30     GeneralErrorHandler(objApp.objArch.AsMsgStruct, cmController,
            -
                                     cmClassName,
            cmMethodName)
35     Select Case CStr(nResumeCode)
        Case cmErrorResume
            Resume
        Case cmErrorResumeNext
            Resume Next
    
```



```

Case cmErrorExit
    Exit Sub
Case cmErrorQuiesce
    Quiesce
5   Case Else
        objApp.Shutdown
        End Select
    End Select
10  End Sub

```

In order to prevent recursive calls the GeneralErrorHandler keeps a collection of controllers that are in the process of shutting down. If it is called twice in a row by the same controller 206, it is able to detect and short-circuit the loop. When the controller 206 finally does terminate, it calls the UnRegisterError function to let the GeneralErrorHandler know that it has shut down and removed from the collection of controllers.

Shutdown Process

After being told what to do by the GeneralErrorHandler, the controller 206 in error may try to execute the statement that caused the error, proceed as if nothing happened, exit the current function, call its Quiesce function to shut itself down, or call the Shutdown method on the App Object 202 to shut the entire application down.

Additional Standard Methods

Searching

Controllers 206 that manage search windows have a public method named Find<Noun>s where <Noun> is the type of object being searched for. This method is called in the event handler for the Find Now button.

Saving

Any controller 206 that manages an edit window has a public method called Save that saves changes the user makes to the data on the form 204. This method is called by the event handlers for both the Save and OK buttons (when/if the OK button needs to save changes before closing).

Closing

A VB window is closed by the user in several ways: via the control-box in upper left corner, the X button in upper right corner, or the Close button. When the form closes, the only method that will always be called, regardless of the way in which the close was initiated, is the form's 204 QueryUnload event handler.

Because of this, there cannot be a standard Close method. Any processing that must occur when a window closes is to be done in the QueryUnload method on the controller 206 (which is called by the form's QueryUnload event handler).

The VB statement, Unload Me, appears in the Close button's event handler to manually initiate the unloading process. In this way, the Close button mimics the functionality of the control box and the X button, so that the closing process is handled the same way every time, regardless of how the user triggered the close.

The OK button's event handler also executes the Unload Me statement, but calls the Save method on the controller first to save any pending changes.

BUSINESS OBJECTS

Business Objects 207 are responsible for containing data, maintaining the integrity of that data, and exposing functions that make the data easy to manipulate. Whenever logic pertains to a single BO 207 it is a candidate to be placed on that BO. This ensures that it will not be coded once for each controller

206 that needs it. Following are some standard examples of business object logic.

Business Logic: Managing Life Cycle State

5 *Overview*

The “state” of a business object 207 is the set of all its attributes. Life cycle state refers only to a single attribute (or a small group of attributes) that determine where the BO 207 is in its life cycle. For example, the life cycle states of a Task are Open, Completed, Cleared, or Error. Business objectives usually involve
10 moving a BO toward its final state (i.e., Completed for a Task, Closed for a Supplement, etc.).

Often, there are restrictions on a BO’s movement through its life cycle. For example, a Task may only move to the Error state after first being Completed or
15 Cleared. BOs provide a mechanism to ensure that they do not violate life cycle restrictions when they move from state to state.

Approach

A BO 207 has a method to move to each one of its different life cycle states. Rather than simply exposing a public variable containing the life cycle state of
20 the task, the BO exposes methods, such as Task.Clear(), Task.Complete(), and Task.MarkInError(), that move the task a new state. This approach prevents the task from containing an invalid value for life cycle state, and makes it obvious what the life cycle states of a task are.

Example

```
25  ' CTask Business Object
    Public Sub MarkInError()
        On Error Goto ErrorHandler

        Select Case m_nLifeCycleState
30      ' move to error only if I've already been completed or
        cleared
            Case cmTaskCompleted, cmTaskCleared
```

```

        m_nLifecycleState = cmTaskInError
        ' otherwise, raise an error
        Case Else
            Err.Raise cmErrInvalidLifecycleState
5      End Select
      Exit Sub
    ErrorHandler:
      Err.Raise Err.Number
10   End Sub

```

Business Logic: Operating on Groups of Business Objects

Overview

- 15 Sometimes, a BO 207 acts as a container for a group of other BOs. This happens when performing operations involving multiple BOs. For example, to close, a claim ensures that it has no open supplements or tasks. There might be a method on the claim BO - CanClose() - that evaluates the business rules restricting the closing of a claim and return true or false. Another situation might involve
- 20 retrieving the open tasks for a claim. The claim can loop through its collection of tasks, asking each task if it is open and, if so, adding it to a temporary collection which is returned to the caller.

Example

```

25   ' Claim Business Object
   ' Error handling omitted for clarity
   Public Function CanClose() As Boolean
      CanClose = HasOpenTasks() And HasOpenSupplements()
   End Function

30   Public Function HasOpenTasks() As Boolean
      ' assume that I have open tasks
      HasOpenTasks = True
      ' loop through all my tasks and exit if I find one that is
      open
35      Dim task As CTask
      For Each task In m_colTasks
         If task.IsOpen() Then Exit Function
      Next task
      ' I must not have any open tasks
40      HasOpenTasks = False
   End Function

   Public Function HasOpenSupplements() As Boolean

```

```

        ' assume that I have open supplements
        HasOpenSupplements = True
        ' loop through all my supplements and exit if I find one
        that is open
5         Dim supp As CSupplement
        For Each supp In m_colSupplements
            If supp.IsOpen() Then Exit Function
        Next supp
        HasOpenSupplements = False
10     End Function

    Public Function GetOpenTasks() As Collection
        Dim task As CTask
        Dim colOpenTasks As Collection
15     For Each task In m_colTasks
        If task.IsOpen() Then colOpenTasks.Add task, task.Id
        Next task
        Set GetOpenTasks = colOpenTasks
20     End Function

```

Business Object Structures

Overview

When a BO 207 is added or updated, it sends all of its attributes down to a server component 222 to write to the database. Instead of explicitly referring to each attribute in the parameter list of the functions on the CCA 208 and server component 222, all the attributes are sent in a single variant array. This array is also known as a structure.

Approach

Each editable BO 207 has a method named AsStruct that takes the object's member variables and puts them in a variant array. The CCA 208 calls this method on a BO 207 before it sends the BO 207 down to the server component 222 to be added or updated. The reason that this is necessary is that, although object references can be passed by value over the network, the objects themselves cannot. Only basic data types like Integer and String can be sent by value to a server component 222. A VB enumeration is used to name the slots of the structure, so that the server component 222 can use a symbolic name to access

elements in the array instead of an index. Note that this is generally used only when performing adds or full updates on a business object 207.

In a few cases, there is a reason to re-instantiate the BO 207 on the server side.

- 5 The FromStruct method does exactly the opposite of the AsStruct method and initializes the BO 207 from a variant array. The size of the structure passed as a parameter to FromStruct is checked to increase the certainty that it is a valid structure.
- 10 When a BO 207 contains a reference to another BO 207, the AsStruct method stores the primary key of the referenced BO 207. For example, the Task structure contains a PerformerId, not the performer BO 207 that is referenced by the task. When the FromStruct method encounters the PerformerId in the task structure, it instantiates a new performer BO and fills in the ID, leaving the rest of the
- 15 performer BO empty.

Example

```

    ' CTask Business Object

    ' enumeration of all task attributes
20  Public Enum TaskAttributes
        cmTaskId
        cmTaskName
        :
        cmTaskDescription
25  End Enum

    ' all task attributes declarations here

    ' all setter and getter functions here
30

    Public Function AsStruct() As CTask
        On Error Goto ErrorHandler

        ' create and fill structure
35  Dim vStruct(cmTaskNumOfAttributes - 1) As Variant
        vStruct(cmTaskId) = m_vId
        vStruct(cmTaskName) = m_sName
        vStruct(cmTaskPerformerId) = m_vPerformerId
        :
40  vStruct(cmTaskDescription) = m_sDescription

```

```

        AsStruct = vStruct
        Exit Function
ErrorHandler:
        Err.Raise Err.Number
5      End Function

Public Sub FromStruct(vStruct As Variant)
    On Error Goto ErrorHandler

10      ' check size of vStruct
        If Ubound(vStruct) <> (cmTaskNumOfAttributes - 1) Then
            Err.Raise cmErrInvalidParameters

            ' update my values from the structure
15            m_vId = vStruct(cmTaskId)
            m_sName = vStruct(cmTaskName)
            m_vPerformer.Id = vStruct(cmTaskPerformerId)
            :
            m_sDescription = vStruct(cmTaskDescription)
20            Exit Sub
        ErrorHandler:
            Err.Raise Err.Number
        End Sub

25

```

Cloning Business Objects

Overview

Often a copy of a business object 207 is made. Cloning is a way to implement this kind of functionality by encapsulating the copying process in the BO 207 itself. Controllers 206 that need to make tentative changes to a business object 207 simply ask the original BO 207 for a clone and make changes to the clone. If the user decides to save the changes, the controller 206 ask the original BO to update itself from the changes made to the clone.

Approach

Each BO 207 has a Clone method to return a shallow copy of itself. A shallow copy is a copy that doesn't include copies of the other objects that the BO 207 refers to, but only a copy of a reference to those objects. For example, to clone a task, it does not give the clone a brand new claim object; it gives the clone a new reference to the existing claim object. Collections are the only exception to this

rule – they are always copied completely since they contain references to other BOs.

Each BO 207 also has an UpdateFromClone method to allow it “merge” a clone
5 back in to itself by changing its attributes to match the changes made to the clone.

Example

```

` CTask Business Object
Public Function Clone() As CTask
    On Error Goto ErrorHandler
10
    ` create clone object
    Dim tskClone As CTask
    Set tskClone = New CTask

15
    ` fill clone with my data
    With tskClone
        .Id = m_vId
        .Name = m_sName
        .PerformerId = m_vPerformerId
20        Set .Performer = m_prfPerformer
        :
        .Description = m_sDescription
    End With

25
    Set Clone = tskClone
    Exit Function
ErrorHandler:
    Err.Raise Err.Number
End Function

30
Public Sub UpdateFromClone(tskClone As CTask)
    On Error Goto ErrorHandler

    ` set my values equal to the clone's values
35    With tskClone
        m_vId = .ID
        m_sName = .Name
        m_vPerformerId = .PerformerId
        Set m_prfPerformer = .Performer
40        :
        m_sDescription = .Description
    End With

    Exit Sub
ErrorHandler:
45    Err.Raise Err.Number
End Sub
```


Half-Baked Business Objects

5 *Overview*

BOs 207 occasionally are filled only half-full for performance reasons. This is done for queries involving multiple tables that return large data sets. Using half-baked BOs 207 can be an error prone process, so it is essential that the half-baking of BOs are carefully managed and contained.

10

In most applications, there are two kinds of windows – search windows and edit/detail windows. Search windows are the only windows that half-bake BOs 207. Generally, half-baking only is a problem when a detail window expecting a fully-baked BO receives a half-baked BO from a search window.

15 *Approach*

Detail windows refresh the BOs 207 they are passed by the search windows, regardless of whether or not they were already fully-baked. This addresses the problems associated with passing half-baked BOs and also helps ensure that the BO 207 is up-to-date.

20

This approach requires another type of method (besides Get, Add, Update, and Delete) on the CCA 208: a Refresh method. This method is very similar to a Get method (in fact, it calls the same method on the server component) but is unique because it refreshes the data in objects that are already created. The detail window's controller 206 calls the appropriate CCA 208 passing the BO 207 to be refreshed, and may assume that, when control returns from the CCA 208, the BO 207 will be up-to-date and fully-baked.

25

This is may not be necessary if two windows are very closely related. If the first window is the only window that ever opens the second, it is necessary for the

30

second window to refresh the BO 207 passed by the first window if it knows that the BO 207 is baked fully enough to be used.

5

CCAs

CCAs 208 are responsible for transforming data from row and columns in a recordset to business objects 207, and for executing calls to server components 222 on behalf of controllers 206.

Retrieving Business Objects

Overview

15 After asking a component to retrieve data, the CCA 208 marshals the data returned by the component into business objects 207 that are used by the UI Controller 206.

Approach

The marshaling process is as follows:

20

CCAs 208 call GetRows on the recordset to get a copy of its data in a variant array in order to release the recordset as soon as possible. A method exist to coordinate the marshaling of each recordset returned by the component.

25 Only one recordset is coordinated in the marshaling process of a single method. A method exist to build a BO from a single row of a recordset. This method is called once for each row in the recordset by the marshaling coordination method.

Example

30

```
` Task CCA  
Public Function GetAllTasks() As Collection
```

```
On Error Goto ErrorHandler

' call a helper method to retrieve tasks
Dim vRows As Variant
5 vRows = RetrieveAllTasks

Dim i As Integer
Dim task As CTask
Dim colTasks As Collection
10 Set colTasks = New Collection

' vRows is dimmed as column, row. Loop til I run out of
rows.
For i = 0 To Ubound(vRows, 2)
15 ' build BO using helper method
Set task = BuildTaskFromRow(vRows, i)
' add to collection with ID as the key
colTasks.Add task, task.Id
Next i
20
Set MarshalTasks = colTasks
Exit Function
ErrorHandler:
Err.Raise Err.Number
25 End Function

Private Function RetrieveAllTasks() As Variant
On Error Goto ErrorHandler

30 ' call my component and get a recordset full of all tasks
Dim rs As ADOR.Recordset
Set rs = tskComp.GetAllTasks()

' get data in variant array from the recordset
35 GetAllTasks = rs.GetRows

' release the recordset ASAP
rs.Close
Set rs = Nothing
40
Exit Function
ErrorHandler:
Err.Raise Err.Number
45 End Function

Private Function BuildTaskFromRow(vRows As Variant,
nCurrentRow As Integer, _
Optional task As CTask) As
CTask
50 On Error Goto ErrorHandler

' create task if it wasn't passed
If task Is Nothing Then Set task = New CTask
```

```
        ' fill task with data
    With task
        .Id = vRows(0, nCurrentRow)
5        .Name = vRows(1, nCurrentRow)
        .PerformerId = vRows(2, nCurrentRow)
        :
        .Description = vRows(32, nCurrentRow)
10    End With

    Set BuildTaskFromRow = task
    Exit Function
ErrorHandler:
    Err.Raise Err.Number
15 End Function
```

Refreshing Business Objects

Overview

20 The logic to refresh BOs 207 is very similar to the logic to create them in the first place. A “refresh” method is very similar to a “get” method, but must use BOs 207 that already exist when carrying out the marshalling process.

Example

```
25 ' Task CCA
    Public Sub RefreshTask(task As CTask)
        On Error Goto ErrorHandler

        ' call a helper method to retrieve tasks
        Dim vRow As Variant
30    vRow = RetrieveTaskWithId(task.Id)

        BuildTaskFromRow vRow, i, task
        Exit Sub
ErrorHandler:
35    Err.Raise Err.Number
    End Sub

    Private Function RetrieveTaskWithId(vId As Variant) As Variant
        On Error Goto ErrorHandler

        ' call my component and get a recordset full of all tasks
        Dim rs As ADOR.Recordset
        Set rs = tsComp.GetTaskWithId(vId)
45    ' get data in variant array from the recordset
        RetrieveTaskWithId = rs.GetRows
```

```

        ' release the recordset ASAP
        rs.Close
        Set rs = Nothing

5      Exit Function
      ErrorHandler:
        Err.Raise Err.Number
      End Function

```

10

Adding Business Objects

Overview

Controllers 206 are responsible for creating and populating new BOs 207. To
 15 add a BO 207 to the database, the controller 206 must call the CCA 208, passing
 the business object 207 to be added. The CCA 208 calls the AsStruct method on
 the BO 207, and pass the BO structure down to the component to be saved. It
 then updates the BO 207 with the ID and timestamp generated by the server.
 Note the method on the CCA 208 just updates the BO 207.

Example

```

20  ' Task CCA
    Public Sub AddTask(task As CTask)
        On Error Goto ErrorHandler

25      ' call component to add task passing a task structure
        Dim vIdAndTimestamp As Variant
        vIdAndTimestamp = tskComp.AddTask(task.AsStruct())

        ' update ID and Timestamp on task
        task.Id = vIdAndTimestamp(0)
        task.TimeStamp = vIdAndTimestamp(1)
30      Exit Sub
    ErrorHandler:
        Err.Raise Err.Number
35  End Sub

```

Updating Business Objects

Overview

40 The update process is very similar to the add process. The only difference is that
 the server component only returns a timestamp, since the BO already has an ID.

Example

```

` Task CCA
Public Sub UpdateTask(task As CTask)
    On Error Goto ErrorHandler
5
    ` call component to update task passing a task structure
    Dim lTimeStamp As Long
    lTimeStamp = tskComp.AddTask(task.AsStruct())

10    ` update Timestamp on task
    task.TimeStamp = lTimeStamp
    Exit Sub
ErrorHandler:
    Err.Raise Err.Number
15 End Sub

```

Deleting Business Objects

Deleting Overview

Like the add and the update methods, delete methods take a business object 207 as a parameter and do not have a return value. The delete method does not modify the object 207 it is deleting since that object will soon be discarded.

Example

```

` Task CCA
Public Sub DeleteTask(task As CTask)
25    On Error Goto ErrorHandler

    ` call component to update task passing a the ID and
    Timestamp
    tskComp.DeleteTask task.Id, task.TimeStamp
30    Exit Sub
ErrorHandler:
    Err.Raise Err.Number
    End Sub

```

35

SERVER COMPONENT

40 Server components 222 have two purposes: enforcing business rules and carrying out data access operations. They are designed to avoid duplicating logic between functions.

Designing for Reuse

Enforcing Encapsulation

Each server component 222 encapsulates a single database table or a set of closely related database tables. As much as possible, server components 222 select or modify data from a single table. A component occasionally selects from a table that is “owned” or encapsulated by another component in order to use a join (for efficiency reasons). A server component 222 often collaborates with other server components to complete a business transaction.

Partitioning Logic between Multiple Classes

If the component becomes very large, it is split into more than one class. When this occurs, it is divided into two classes – one for business rules and one for data access. The business rules class implements the component’s interface and utilizes the data access class to modify data as needed.

Example

```

Private Function MarkTaskInError(vMsg As Variant, _
                                vTaskId As Variant, _
                                lTimestamp As Variant, _
                                sReason As String) As Long
    On Error GoTo ErrorHandler
    Const cmMethodName = "MarkTaskInError"

    ' set the SQL statement
    Dim sSQL As String
    sSQL = cmSQLMarkTaskInError

    ' get a new timestamp
    Dim lNewTimeStamp As Long
    lNewTimeStamp = GetTimeStamp()

    ' create and fill a collection of arguments to be merged
with
    ' the SQL by the ExecuteQuery method
    Dim colArgs As CCollection
    Set colArgs = New CCollection
    With colArgs
        .Add lNewTimeStamp
        .Add cmDBBooleanTrue
        .Add sReason
    
```

```
        .Add vTaskId
        .Add lTimestamp
    End With

5      ` run the SQL and set my return value
    ExecuteQuery vMsg, cmUpdate, sSQL, colArguments:=colArgs
    MarkTaskInError = lNewTimeStamp

        ` tell MTS I'm done
10     GetObjectContext.SetComplete
    Exit Function

ErrorHandler:
    ` do error handling here
15 End Function
```

20

25

30

ERROR HANDLING

General Information

35

With the exception of “Class_Initialize”, “Class_Terminate”, and methods called within an error handler, every function or subroutine has a user defined ‘On Error GoTo’ statement. The first line in each procedure is: On Error GoTo

ErrorHandler. A line near the end of the procedure is given a label

- 5 “ErrorHandler”. (Note that because line labels in VB 5.0 have procedure scope, each procedure can have a line labeled “ErrorHandler”). The ErrorHandler label is preceded by a Exit Sub or Exit Function statement to avoid executing the error handling code when there is no error.

- 10 Errors are handled differently based on the module’s level within the application (i.e., user interface modules are responsible for displaying error messages to the user).

All modules take advantage of technical architecture to log messages. Client
15 modules that already have a reference to the architecture call the Log Manager object directly. Because server modules do not usually have a reference to the architecture, they use the LogMessage() global function compiled into each server component.

- 20 Any errors that are raised within a server component 222 are handled by the calling UI controller 206. This ensures that the user is appropriately notified of the error and that business errors are not translated to unhandled fatal errors.

All unexpected errors are handled by a general error handler function at the
25 global Architecture module in order to always gracefully shut-down the application.

Server Component Errors

The error handler for each service module contains a Case statement to check for all anticipated errors. If the error is not a recoverable error, the logic to handle it is first tell MTS about the error by calling `GetObjectContext.SetAbort()`. Next, the global `LogMessage()` function is called to log the short description intended for level one support personnel. Then the `LogMessage()` function is called a second time to log the detailed description of the error for upper level support personnel. Finally, the error is re-raised, so that the calling function will know the operation failed.

- 10 A default Case condition is coded to handle any unexpected errors. This logs the VB generated error then raises it. A code sample is provided below:

Following is an example of how error handling in the task component is implemented when an attempt is made to reassign a task to a performer that doesn't exist. Executing SQL to reassign a task to a non-existent performer generates a referential integrity violation error, which is trapped in this error handler:

```
20 'Class Declarations
Private Const cmClassName = "CTaskComp"

Public Sub ReassignTask(...)
    On Error GoTo ErrorHandler
    Private Const cmMethodName = "ReassignTask"
    Private Const cmErrReassignTask = "Could not reassign
25 task."
    :
    ' logic to reassign a task
    :
    GetObjectContext.SetComplete
30 Exit Sub

ErrorHandler:
    Dim sShortDescr As String
    sShortDescr = cmErrReassignTask
    ' log short description as warning
    LogMessage vMsg, Err.Number, cmSeverityWarning,
    cmClassName, cmMethodName, sShortDescr
35

    Dim sLongDescr As String
    Select Case Err.Number
40
```

```

        Case cmErrRefIntegrityViolation
            GetObjectContext.SetAbort
            sLongDescr = "Referential integrity violation -
5      tried " _
            & "to reassign task to a non-existent
performer. " _
            & "Association ID: " & sAssnId _
            & "Association Type: " & sAssnType _
            & "Old Performer Id: " & sOldPerformerId _
10          & "New Performer Id: " & sNewPerformerId _
            ` log long description as severe
            LogMessage vMsg, Err.Number, cmSeveritySevere,
cmClassName, cmMethodName, _
                sLongDescr
15          Err.Raise Err.Number
            :
            ` more error handling
            :
            Case Else
20          ` let architecture handle unanticipated error
            Dim nResumeCode As Integer
            nResumeCode = GeneralErrorHandler(vMsg, cmServer,
cmClassName, cmMethodName)
            Select Case nResumeCode
25          Case cmErrorResume
                Resume
            Case cmErrorResumeNext
                Resume Next
            Case cmErrorExit
30          Exit Sub
            Case Else
                GetObjectContext.Abort
                Err.Raise Err.Number
            End Select
35      End Select
    End Sub
End Sub

```

CCAs, CCI's, Business Objects, and Forms

40 All CCI's, CCA's, Business Objects, and Forms raise any error that is generated.
A code sample is provided below:

```

Sub SubName()
    On Error GoTo ErrorHandler
45    <the procedure's code here>
    .....
    Exit Sub
ErrorHandler:
    Err.Raise Err.Number
50 End Sub

```

5

User Interface Controller Errors

The user interface controllers 206 handle any errors generated and passed up from the lower levels of the application. UI modules are responsible for handling whatever errors might be raised by server components 222 by displaying a message box to the user.

10

Any error generated in the UI's is also displayed to the user in a dialog box. Any error initiated on the client is logged using the LogMessage() procedure. Errors initiated on the server will already have been logged and therefore do not need to be logged again.

15

All unexpected errors are trapped by a general error method at the global architecture module. Depending on the value returned from this function, the controller may resume on the statement that triggered the error, resume on the next statement, call its Quiesce function to shut itself down, or call a Shutdown method on the application object to shutdown the entire application.

20

No errors are raised from this level of the application, since controllers handle all errors. A code sample of a controller error handler is provided below:

25

```
`Class Constants
Private Const cmClassName As String = "<ComponentName>"
```

30

```
Sub SubName()
    On Error GoTo ErrorHandler
    Const cmMethodName As String = "<MethodName>"
    :
    :
    <the procedure's code here>
    :
    :
    Exit Sub
```

35

```

ErrorHandler:

    Select Case CStr(Err.Number)
5      Case ...
        'display the error to the user
        ' perform any necessary logic
        Exit Sub (or Resume, or Resume Next)
    :
10    :
        Case Else
            Dim nResumeCode As Integer
            nResumeCode = GeneralErrorHandler(vMsg,
15      cmController, cmClassName, cmMethodName)
            Select Case CStr(nResumeCode)
                Case cmErrorResume
                    Resume
                Case cmErrorResumeNext
                    Resume Next
20      Case cmErrorExit
                    Exit Sub
                Case cmErrorQuiesce
                    Quiesce
                Case Else
25      Case Else
                    objApp.SHUTDOWN
            End Select
        End Select
    End Select
    End Sub
30

```

LOCALIZATION

The CBAM application is constructed so that it can be localized for different
35 languages and countries with a minimum effort or conversion.

Requirements and Scope

The CBAM architecture provides support for certain localization features:

40 Localizable Resource Repository;

Flexible User Interface Design;

Date Format Localization; and

Exposure of Windows Operation System Localization Features.

Localization Approach Checklist

| Localization Feature | Supported via Architecture Service | Supported via Architecture API's | Best Practices and Assumptions* |
|--|------------------------------------|----------------------------------|---------------------------------|
| Language Code (Locale Identifier) | ✓ | | |
| Time Zones | | | ✓ |
| Date/Time | | ✓ | |
| Name | | | ✓ |
| Telephone Numbers | | | ✓ |
| Functions to Avoid | | | ✓ |
| Weights and Measures | | | ✓ |
| Money | | | ✓ |
| Addresses/Address Hierarchies | | | ✓ |
| Menus, Icons, Labels/Identifiers on Windows | | | ✓ |
| Messages/ Dialogs | ✓ | | |
| String Functions, Sort Order and String Comparison | ✓ | | |
| Code Tables | ✓ | | |
| Drop-Down Lists | ✓ | | |
| Form & Correspondence Templates | | | ✓ |
| Online and Printed Documentation | | | ✓ |
| Database (DB2) | | | ✓ |
| 3 rd Party Controls | | | ✓ |
| Miscellaneous | | | ✓ |

5

Localizable Literals Repository

The CBAM application has an infrastructure to support multiple languages. The architecture acts as a centralized literals repository via its Codes Table Approach.

10

The Codes Tables have localization in mind. Each row in the codes table contains an associated language identifier. Via the language identifier, any given code can support values of any language.

Flexible Interface 400

Flexible user interface 400 and code makes customization easy. The Figure 4
5 illustrates how different languages are repainted and recompiled. For example,
both a English UI 404, and a French UI 406 are easily accommodated. This
entails minimal effort because both UIs share the same core code base 402.
Updates to the UIs are merely be a superficial change.

10 Generic graphics are used and overcrowding is avoided to create a user interface
which is easy to localize.

Data Localization

Language localization settings affect the way dates are displayed on UI's (user
interfaces). The default system display format is different for different
Language/Countries. For Example:

20 English (United States) displays "mm/dd/yy" (e.g., "05/16/98")

English (United Kingdom) displays "dd/mm/yy" (e.g., "16/05/98").

The present inventions UI's employ a number of third-party date controls
including *Sheridan Calendar Widgets* (from Sheridan Software) which allow
25 developers to set predefined input masks for dates (via the controls' Property
Pages; the property in this case is "Mask").

Although the Mask property can be manipulated, the default setting is preferably
accepted (the default setting for Mask is "0 – System Default"; it is set at design
30 time). Accepting the default system settings eliminates the need to code for
multiple locales (with some possible exceptions), does not interfere with intrinsic

Visual Basic functions such as DateAdd, and allows dates to be formatted as strings for use in SQL.

The test program illustrated below shows how a date using the English (United

- 5 Kingdom) default system date format is reformatted to a user-defined format (in this case, a string constant for use with DB2 SQL statements):

```
Const cmDB2DateAndTime = "mm-dd-yyyy-h.mm.ss"

10 Private Sub cmdConvToDB2_Click()
    Dim sDB2Date As String
    sDB2Date = Format$(SSDateCombo1.Date,
        cmDB2DateAndTime)
    txtDB2String.Text = sDB2Date
15 End Sub
```

Leverage Windows Operation System

The CBAM architecture exposes interface methods on the RegistryService object

- 20 to access locale specific values which are set from the control panel.

The architecture exposes an API from the RegistryService object which allows access to all of the information available in the control panel. Shown below is the signature of the API:

- 25 GetRegionalInfo(Info As RegionalInfo) As String

Where RegionalInfo can be any of the values in the table below:

| RegionalInfo Values | | | |
|---------------------|----------------------------|------------------------|--------------------|
| CmLanguageId | CmDTDateSeparator | cmDayLongNameMonday | cmMonthLongNameJan |
| CmLanguageLocalized | CmDTTimeSeparator | cmDayLongNameTuesday | cmMonthLongNameFeb |
| CmLanguageEnglish | CmDTShortDateFormat | cmDayLongNameWednesday | cmMonthLongNameMar |
| CmLanguageAbbr | CmDLTongDateFormat | cmDayLongNameThursday | cmMonthLongNameApr |
| CmLanguageNative | CmDTTimeFormat | cmDayLongNameFriday | cmMonthLongNameMay |
| CmCountryId | CmDTDateFormatOrdering | cmDayLongNameSaturday | cmMonthLongNameJun |
| CmCountryLocalized | CmDTLongDateOrdering | cmDayLongNameSunday | cmMonthLongNameJul |
| CmCountryEnglish | CmDTTimeFormatSpecifier | cmDayAbbrNameMonday | cmMonthLongNameAug |
| CmCountryAbbr | CmDTCenturyFormatSpecifier | cmDayAbbrNameTuesday | cmMonthLongNameSep |
| CmCountryNative | CmDTTimeWithLeadingZeros | cmDayAbbrNameWednesday | cmMonthLongNameOct |
| CmLanguageDefaultId | CmDTDayWithLeadingZeros | cmDayAbbrNameThursday | cmMonthLongNameNov |
| CmCountryDefaultId | CmDTMonthWithLeadingZeros | cmDayAbbrNameFriday | cmMonthLongNameDec |
| | CmDTDesignatorAM | cmDayAbbrNameSaturday | cmMonthAbbrNameJan |
| | CmDTDesignatorPM | cmDayAbbrNameSunday | cmMonthAbbrNameFeb |

| | | | |
|--|--|--|--|
| | | | cmMonthAbbrNameMar cmMonthAbbrNameApr cmMonthAbbrNameMay cmMonthAbbrNameJun cmMonthAbbrNameJul cmMonthAbbrNameAug cmMonthAbbrNameSep cmMonthAbbrNameOct cmMonthAbbrNameNov cmMonthAbbrNameDec |
|--|--|--|--|

Get RegionalInfo Example:

```
Private Sub Command1_Click()  
5      MsgBox "This is the language id for English: " & _  
        GetRegionalInfo(cmLanguageId)  
End Sub
```

10 Logical Unit of Work

The Logical Unit of Work (LUW) pattern enables separation of concern between UI Controllers 206 and business logic.

Overview

15 Normally, when a user opens a window, makes changes, and clicks OK or Save, a server component 222 is called to execute a transaction that will save the user's changes to the database. Because of this, it can be said that the window defines the boundary of the transaction, since the transaction is committed when the window closes.

20 The LUW pattern is useful when database transactions span windows. For example, a user begins editing data on one window and then, without saving, opens another window and begins editing data on that window, the save process involves multiple windows. Neither window controller 206 can manage the saving process, since data from both windows must be saved as an part of an indivisible unit of work. Instead, a LUW object is introduced to manage the saving process.

25

The LUW acts as a sort of “shopping bag”. When a controller 206 modifies a business object 207, it puts it in the bag to be paid for (saved) later. It might give the bag to another controller 206 to finish the shopping (modify more objects), and then to a third controller who pays (asks the LUW to initiate the save).

Approach

Controllers 206 may have different levels of LUW “awareness”:

Requires New: always creates a new LUW;

Requires: requires an LUW, and creates a new LUW only if one is not passed by the calling controller;

Requires Existing: requires an LUW, but does not create a new LUW if one is not passed by the calling controller. Raises an error if no LUW is passed; and

Not Supported: is not capable of using an LUW.

Controllers 206 that always require a new LUW create that LUW in their ArchInitClass function during initialization. They may choose whether or not to involve other windows in their LUW. If it is desirable for another window to be involved in an existing LUW, the controller 206 that owns the LUW passes a reference to that LUW when it calls the App Object 202 to open the second window. Controllers 206 that require an LUW or require an existing LUW accept the LUW as a parameter in the ArchInitClass function.

LUWs contain all the necessary logic to persist their “contents” – the modified BOs 207. They handle calling methods on the CCA 208 and updating the BOs 207 with new IDs and/or timestamps.

ARCHITECTURE API HIERARCHY

Following is an overview of the architecture object model, including a description of each method and the parameters it accepts. Additional sections address the concepts behind specific areas (code caching, message logging, and data access) in more detail.

5

Arch Object

Figure 5 depicts the current properties on the Arch Object 200.

The following are APIs located on the Arch Object 200 which return either a retrieved or created instance of an object which implements the following interfaces:

10

CodesMan() 500;

TextMan() 502;

IdMan() 504;

15

RegMan() 506;

LogMan() 508;

ErrMan() 510;

UserMan() 512; and

SecurityMan() 514.

20

AsMsgStruct()

This method on the Arch Object returns a variant structure to pass along a remote message.

25

Syntax:

```
Public Function AsMsgStruct() As Variant  
End Function
```

30

Example:

```
Dim vMsg As Variant  
vMsg = objArch.AsMsgStruct
```

CodesMan

The following are APIs located on the interface of the Arch Object 200 named

5 CodesMan 500:

```
CheckCacheFreshness();
FillControl(ctlControl, nCategory, nFillType, [nCodeStatus],
[colAssignedCodes]);
10 FilterCodes(colAllCodes, nCodeStatus);
GetCategoryCodes(nCategory);
GetCodeObject(nCategory, sCode);
GetResourceString(lStringId);
GetServerDate();
15 RefreshCache();
RemoveValidDates(sCode, colPassedInAssignedCodes); and
SetServerDate(dtServerDate).
```

CheckCacheFreshness()

Checks whether the cache has expired, if so refresh.

20

Syntax:

```
Private Sub CheckCacheFreshness()
End Sub
```

25 ***Example:***

```
CheckCacheFreshness
```

FillControl()

This API is used to fill listboxes or comboboxes with values from a list of
CodeDecodes. Returns a collection for subsequent lookups to Code objects used
30 to fill controls.

Syntax:

```
Public Function FillControl(ctlControl As Object, nCategory As CodeDecodeCats,
nFillType As CodeDecodeLengths, Optional nCodeStatus As CodeDecodeFilters =
cmValidCodes, Optional colAssignedCodes As CCollection) As CCollection
End Function
```

Parameters:

ctlControl: A reference to a passed in listbox or combobox.
nCategory: The integer based constant which classified these CodeDecodes from others. Several of the valid constants include:

cmCatTaskType = 1
cmCatSource
cmCatTaskStatus

nFillType: The attribute of the CodeDecode which you want to fill. Several of the valid values include:

cmCode
cmShortDecode
cmLongDecode

nCodeStatus: Optional value which filters the Code Decodes according to their Effective and Expiration dates. Several of the valid constants include:

| | |
|----------------|---|
| cmAllCodes | Pending + Valid + Expired Codes |
| cmPendingCodes | Codes whose effective date is greater than the current date |
| cmValidCodes | Not Pending or Expired Codes |

colAssignedCodes: Used when filling a control which should fill and include assigned values.

Example:

```
'Declare an instance variable for States collection on object
Private colStates As CCollection

'Call FillControl API, and set local collection inst var to collection of
codes which were used to fill the controll. This collection will be used for
subsequent lookups.
Set colStates = objArch.CodesMan.FillControl(frmCurrentForm.cboStates,
cmCatStates, cmLongDecode)
```

FilterCodes()

Returns a collection of code/decodes that are filtered using their effective and expiration dates based on which nCodeStatus is passed from the fillcontrol method.

Syntax:

```
Private Function FilterCodes(colAllCodes As CCollection, nCodeStatus As
CodeDecodeFilters) As CCollection
End Function
```

5

Parameters:

```
colAllCodes:
nCodeStatus:
```

10 *Example:*

```
Set colFilteredCodes = FilterCodes(colCodes, nCodeStatus)
```

GetCategoryCodes()

Returns a collection of CCode objects given a valid category

15 *Syntax:*

```
Public Function GetCategoryCodes(nCategory As CodeDecodeCats) As CCollection
End Function
```

Parameters:

20 nCategory: The integer based constant which classified these CodeDecodes from others.

Example:

```
Dim colMyStates As CCollection
25 Set colMyStates = objArch.CodesMan.GetCategoryCodes(cmCatStates)

'Below shows an example of looking up the Code value for the currently
selected state.
With frmCurrentForm.cboStates
30 If .ListIndex > -1 Then
Dim objCode As CCode
Set objCode = colStates(.ItemData(.ListIndex))
sStateCode = objCode.Code
End If
35 End With
```

GetCodeObject()

Returns a valid CCode object given a specific category and code.

Syntax:

```
40 Public Function GetCodeObject(nCategory As CodeDecodeCats, sCode As String) As
CCode
End Function
```

Parameters:

- nCategory: The integer based constant which classified these CodeDecodes from others.
- 5 sCode: A string indicating the Code attribute of the CodeDecode object.

Example:

```
frmCurrentForm.lblState = objArch.CodesMan.GetCodeObject(cmCatStates,
"IL").LongDecode
```

10 **GetResourceString()**

Returns a string from the resource file given a specific string ID.

Syntax:

- Private Function GetResourceString(lStringId As Long) As String
- 15 End Function

Parameters:

lStringId: The id associated with the string in the resource file.

20 *Example:*

```
sMsg = arch.CodesMan.GetResourceString(CLng(vMessage))
```

GetServerDate()

Returns the date from the server.

25 *Syntax:*

```
Private Function GetServerDate() As Date
End Function
```

Example:

- 30 SetServerDate CCA.GetServerDate

RefreshCache()

Refreshes all of the code obhjects in the cache.

Syntax:

- 35 Private Sub RefreshCache()
- End Sub

Example:

```
m_Cache.RefreshCache
```

RemoveValidCodes()

Removes all valid codes from the passed in assigned codes collection, which is used to see which codes are assigned and not valid.

Syntax:

```
Private Sub RemoveValidCodes(sCode As String, colPassedInAssignedCodes As  
CCollection)  
End Sub
```

Parameters:

```
sCode: Name of code  
colPassedInAssignedCodes: Codes already in use.
```

Example:

```
RemoveValidCodes codCode.Code, colPassedInAssignedCodes
```

SetServerDate()

Sets the server date.

Syntax:

```
Private Sub SetServerDate(dtServerDate As Date)  
End Sub
```

Parameters:

```
dtServerDate: Date of Server.
```

Example:

```
SetServerDate CCA.GetServerDate
```

TextMan

The following are APIs located on the interface of the Arch Object 200 named TextMan 502.

PairUpAposts();

PairUpAmps(); and

MergeParms ().

PairUpAposts ()

Pairs up apostrophes in the passed string.

Syntax:

```
5      Public Function PairUpAposts(sOriginalString As String) As String
      End Function
```

Parameters:

```
      sOriginalString: string passed in by the caller
10
```

Example:

```
      Dim sString As String
      sString = objArch.TextMan.PairUpAposts("This is Monika's string")
      'expected return: sString = "This is Monika''s string"
```

PairUpAmps ()

Pairs up ampersands in the passed string.

Syntax:

```
      Public Function PairUpAmps(sOriginalString As String) As String
20      End Function
```

Parameters:

```
      sOriginalString: string passed in by the caller
```

Example:

```
      Dim sString As String
      sString = objArch.TextMan.PairUpAmps("Forms&Corr")
      'expected return: sString = "Forms&&Corr"
```

MergeParms ()

Merges string with the passed parameters collection.

Syntax:

```
35      Public Function MergeParms(sString As String, colParms As CCollection) As
      String
      End Function
```

Parameters:

sOriginalString: string passed in by the caller
colParms As Ccollection: collection of the parameters passed in by the caller

5 *Example:*

```
Dim sString As String  
sString = objArch.TextMan.MergeParms(sString, colParms)
```

10 **IdMan**

The following are APIs located on the interface of the Arch Object 200 named IdMan 504:

GetGUID();

15 GetSequenceID();

GetTimeStamp();

GetTrackingNbr(); and

GetUniqueId().

GetGUID ()

20

Syntax:

```
Public Function GetGUID()  
End Function
```

25 *Example:*

```
Dim vNewGuid As Variant  
vNewGuid = objArch.IdMan.GetGUID
```

GetSequenceId ()

30 *Syntax:*

```
Public Function GetSequenceId(sTemplateType As CounterName) As String  
End Function
```

Parameters:

35 sTemplateType: The string specifying the template requesting a sequence id
(i.e. cmCountFC = Forms & Corr)

Example:

```
frmCurrentForm.txtTemplateName = objArch.IdMan.GetSequenceId(cmCountFC)
```

GetTimeStamp ()

Syntax:

```
5      Public Function GetTimeStamp()  
      End Function
```

Example:

```
10     Dim nNewTimeStamp As Long  
       nNewTimeStamp = objArch.IdMan.GetTimeStamp
```

GetTrackingNbr ()

15

Syntax:

```
      Public Function GetTrackingNbr()  
      End Function
```

Example:

```
20     Set objTechArch = New CTechArch  
       sUniqueTrackNum = objTechArch.IdMan.GetTrackingNbr
```

GetUniqueId ()

Syntax:

```
25     Public Function GetUniqueId()  
     End Function
```

Example:

```
30     Dim vUId As Variant  
       vNewUId = objArch.IdMan.GetUniqueId
```

35 **RegMan**

The following are APIs located on the interface of the Arch Object 200 named
RegMan 506:

GetCacheLife();

40 GetClientDSN();

```

GetComputerName();
GetDefaultAndValidate();
GetFCArchiveDirectory();
GetFCDistributionDirectory();
5  GetFCMasterDirectory();
   GetFCUserDirectory();
   GetFCWorkingDirectory();
   GetHelpPath();
   GetLocalInfo();
10  GetLogLevel();
   GetRegionalInfo();
   GetRegValue();
   GetServerDSN();
   GetSetting();
15  GetTimerLogLevel();
   GetTimerLogPath(); and
   GetUseLocalCodes().

```

GetCacheLife()

20 *Syntax:*

```

Public Function GetCacheLife() As String
End Function

```

Example:

```

25  Dim s As String
    s = objArch.RegMan.GetCacheLife

```

GetClientDSN()

Syntax:

```

30  Public Function GetClientDSN() As String
    End Function

```

Example:

```

35  Dim s As String
    s = objArch.RegMan.GetClientDSN

```

GetComputerName()

Syntax:

```
5      Public Function GetComputerName() As String
      End Function
```

Example:

```
      Dim s As String
      s = objArch.RegMan.GetComputerName
```

GetDefaultAndValidate()

Syntax:

```
15     Private Function GetDefaultAndValidate(sKey As String) As String
     End Function
```

Parameters:

sKey: The key within the registry of which the user is requesting (i.e.: Help Path)

Example:

```
      Dim sDefault As String
      sDefault = objArch.RegMan.GetDefaultAndValidate(sKey)
```

GetFCArchiveDirectory()

Syntax:

```
25     Public Function GetFCArchiveDirectory() As String
     End Function
```

Example:

```
30     Dim s As String
     s = objArch.RegMan.GetFCArchiveDirectory
```

GetFCDistributionDirectory()

Syntax:

```
35     Public Function GetFCDistributionDirectory() As String
     End Function
```

Example:

```
40     Dim s As String
     s = objArch.RegMan.GetFCDistributionDirectory
```

GetFCMasterDirectory()

Syntax:

```
5      Public Function GetFCMasterDirectory() As String
      End Function
```

Example:

```
      Dim s As String
      s = objArch.RegMan.GetFCMasterDirectory
```

GetFCUserDirectory()

Syntax:

```
15     Public Function GetFCUserDirectory() As String
      End Function
```

Example:

```
20     Dim s As String
      s = objArch.RegMan.GetFCUserDirectory
```

GetFCWorkingDirectory()

Syntax:

```
25     Public Function GetFCWorkingDirectory() As String
      End Function
```

Example:

```
30     Dim s As String
      s = objArch.RegMan.GetFCWorkingDirectory
```

GetHelpPath()

Syntax:

```
35     Public Function GetHelpPath() As String
      End Function
```

Example:

```
      Dim s As String
      s = objArch.RegMan.GetHelpPath
```

GetLocalInfo()

Syntax:

```
5      Public Function GetLocalInfo() As String
      End Function
```

Example:

```
10     Dim s As String
      s = objArch.RegMan.GetLocalInfo
```

GetLogLevel()

Syntax:

```
15     Public Function GetLogLevel() As String
      End Function
```

Example:

```
      Dim s As String
      s = objArch.RegMan.GetLogLevel
```

GetRegionalInfo()

Allows access to all locale specific values which are set from control panel.

Syntax:

```
25     Public Function GetRegionalInfo(Info As RegionalInfo) As String
      End Function
```

Parameters:

Info: string containing the regional information. Several of the valid constants include:

- | | | |
|----|------------------------------|------------------------------|
| 30 | • cmLanguageId = &H1 | ' language id |
| | • cmLanguageLocalized = &H2 | ' localized name of language |
| | • cmLanguageEnglish = &H1001 | ' English name of language |
| | • cmLanguageAbbr = &H3 | ' abbreviated language name |
| 35 | • cmLanguageNative = &H4 | ' native name of language |

Example:

```
      Dim s As String
      s = objArch.RegMan.GetRegionalInfo
```

GetRegValue()

Syntax:

```
Public Function GetRegValue() As String
End Function
```

Example:

```
10 Dim s As String
    s = objArch.RegMan.GetRegValue
```

GetServerDSN()

Syntax:

```
15 Public Function GetServerDSN() As String
End Function
```

Example:

```
20 Dim s As String
    s = objArch.RegMan.GetServerDSN
```

GetSetting()

Get setting from the registry.

Syntax:

```
25 Public Function GetSetting(sKey As String) As String
End Function
```

Parameters:

```
30 sKey: The key within the registry of which the user is requesting (i.e.:
    Help Path)
```

Parameters:

```
GetHelpPath = GetSetting(cmRegHelpPathKey)
```

GetTimerLogLevel()

35

Syntax:

```
Public Function GetTimerLogLevel() As String
End Function
```


Example:

```
Dim s As String
s = objArch.RegMan.GetTimerLogLevel
```

5 ***GetTimerLogPath()***

Syntax:

```
Public Function GetTimerLogPath() As String
End Function
```

10

Example:

```
Dim s As String
s = objArch.RegMan.GetTimerLogPath
```

GetUseLocalCodes()

15 *Syntax:*

```
Public Function GetUseLocalCodes() As String
End Function
```

Example:

20

```
Dim s As String
s = objArch.RegMan.GetUseLocalCodes
```

LPSTRToVBString()

Extracts a VB string from a buffer containing a null terminated string.

25 *Syntax:*

```
Private Function LPSTRToVBString$(ByVal s$)
End Function
```

30

LogMan

The following are APIs located on the interface of the Arch Object 200 named LogMan 508:

35 LogMessage ();
WriteToDatabase(); and
WriteToLocalLog().

LogMessage ()

Used to log the message. This function will determine where the message should be logged, if at all, based on its severity and the vMsg's log level.

Syntax:

```
Public Sub LogMessage(vMsg As Variant, _  
    lSeverity As Long, _  
    sClassName As String, _  
    sMethodName As String, _  
    sVersion As String, _  
    lErrorNum As Long, _  
    Optional sText As String = vbNullString)  
  
End Sub
```

Parameters:

vMsg: the standard architecture message
lSeverity: the severity of the message
sClassName: the name of the class logging the message
sMethodName: the name of the method logging the message
sVersion: the version of the binary file (EXE or DLL) that contains the method logging message
lErrorNum: the number of the current error
sText: an optional parameter containing the text of the message. If omitted, the text will be looked up in a string file or the generic VB error description will be used

Example:

```
If Err.Number <> 0 Then  
    ' log message  
    Arch.LogMan.LogMessage(vMsg, cmSeverityFatal, "COrganizationCTLR",  
        "InitForm",  
        GetVersion(), Err.Number, Err.Description)  
    ' re-raise the error  
    Err.Raise Err.Number  
End If
```

WriteToDatabase ()

Used to log the message to the database on the server using the CLoggingComp. This function returns the TrackingId that is generated by the CLoggingObject.

Syntax:

```
Private Sub WriteToDatabase(vMsg As Variant, msgToLog As CMessage)  
  
End Sub
```

Parameters:

vMsg: the standard architecture message
msgToLog: a parameter containing the text of the message.

5 *Example:*

```
If msgToLog.IsLoggableAtLevel(m_lLocalLogLevel) Then
    WriteToDatabase vMsg, msgToLog
End If
```

WriteToLocalLog ()

- 10 Used to log the message to either a flat file, in the case of Windows 95, or the NT Event Log, in the case of Windows NT.

Syntax:

```
15 Private Sub WriteToLocalLog(msgToLog As CMessage)
    End Sub
```

Parameters:

msgToLog: a parameter containing the text of the message.

20 *Example:*

```
ErrorHandler:
    WriteToLocalLog msgToLog
End Sub
```

25

ErrMan

The following are APIs located on the interface of the Arch Object 200 named

30 ErrMan 510:

HandleError();

RaiseOriginal();

ResetError(); and

Update().

35 ***HandleError()***

This method is passed through to the general error handler in MArch.bas

Syntax:

```
40 Public Function HandleError(vMsg As Variant, nCompType As CompType, sClassName
    As String, sMethodName As String) As ErrResumeCodes
    End Sub
```

Parameters:

5 vMsg: General Architecture Information
 nCompType: Contains tier information (Client or Server)
 sClassName: Class which raised the error.
 sMethodName: Method which raised the error.

RaiseOriginal()

10 This method is used to Reset the error object and raise.

Syntax:

```
Public Sub RaiseOriginal()  
End Sub
```

15 *Example:*

```
objArch.ErrMan.RaiseOriginal
```

ResetError()

This method is used to reset attributes.

20 *Syntax:*

```
Public Sub ResetError()  
End Sub
```

Example:

25 objArch.ErrMan.ResetError

30 ***Update()***

This method is used to update attributes to the values of VBs global Error object.

Syntax:

35 Public Sub Update()
 End Sub

Example:

```
objArch.ErrMan.Update
```

40

UserMan

The following are APIs located on the interface of the Arch Object 200 named

5 UserMan 512.

UserId;

EmployeeId;

EmployeeName;

EmployeeFirstName;

10 EmployeeLastName;

EmployeeMiddleInitial;

GetAuthorizedEmployees;

IsSuperOf ();

IsRelativeOf(); and

15 IsInRole().

UserId()

Syntax:

20 Public Property Get UserId() As String
 End Property

Example:

 Dim sNewUserId As String
 sNewUserId = objArch.UserMan.UserId

25 *EmployeeId()*

Syntax:

30 Public Property Get EmployeeId() As String
 End Property

Example:

 Dim sNewEmployeeId As String
 sNewEmployeeId = objArch.UserMan.EmployeeId

EmployeeName()

5 ***Syntax:***

```
Public Property Get EmployeeName() As String
End Property
```

Example:

```
10    Dim sName As String
      sName = objArch.UserMan.EmployeeName
```

EmployeeFirstName()

Syntax:

```
15    Public Property Get EmployeeFirstName() As String
      End Property
```

Example:

```
20    Dim sFName As String
      sFName = objArch.UserMan.EmployeeFirstName
```

EmployeeLastName()

Syntax:

```
25    Public Property Get EmployeeLastName() As String
      End Property
```

Example:

```
      Dim sLName As String
      sLName = objArch.UserMan.EmployeeLastName
```

30 ***EmployeeMiddleInitial()***

Syntax:

```
      Public Property Get EmployeeMiddleInitial() As String
      End Property
```

35

Example:

```
      Dim sMI As String
      sMI = objArch.UserMan.EmployeeMiddleInitial
```

GetAuthorizedEmployees()

Creates a collection of user's supervisees from the dictionary and returns GetAuthorizedEmployees - collection of authorized employees

Syntax:

```
Public Function GetAuthorizedEmployees() As CCollection
End Function
```

Example:

```
10 Dim colAuth As Collection
    colAuth = objArch.UserMan.GetAuthorizedEmployees
```

IsSuperOf()

Checks if the current user is supervisor of the passed in user.

Syntax:

```
Public Function IsSuperOf(sEmpId As String) As Boolean
End Function
```

Parameters:

sEmpId: string containing Employee ID number

Example:

```
25 Dim bIsSuperOfMonika As Boolean
    bIsSuperOfMonika = objArch.UserMan.IsSuperOf("TS012345")
```

IsRelativeOf()

Checks if the passed in user is relative of the current user.

Syntax:

```
30 Public Function IsRelativeOf(sEmpId As String) As Boolean
End Function
```

Parameters:

sEmpId: string containing Employee ID number

35

Example:

```
Dim bIsRelativeOfMonika As Boolean
bIsRelativeOfMonika = objArch.UserMan.IsRelativeOf("TS012345")
```

IsInRole ()

Checks to see if the current user is in a certain role.

5

Syntax:

```
Public Function IsInRole(sRole As String) As Boolean
End Function
```

10 ***Parameters:***

sRole: string containing role

Example:

```
Dim bIsInRoleTaskLibrarian As Boolean
15 bIsInRoleTaskLibrarian = objArch.UserMan.IsInRole("TA")
```

20

SecurityMan

The following APIs are located on the interface of the Arch Object 200 named SecurityMan 514.

25 EvalClaimRules;
EvalFileNoteRules;
EvalFormsCorrRules;
EvalOrgRules;
EvalRunApplicationRules;
30 EvalRunEventProcRules;
EvalTaskTemplateRules;
EvalUserProfilesRules;
IsOperAuthorized;
GetUserId; and
35 OverrideUser.

EvalClaimRules ()

This API references business rules for Claim security checking and returns a boolean if rules are met.

Syntax:

```
Private Function EvalClaimRules(lBasicOp As cmBasicOperations, vContextData As
Variant) As Boolean
End Function
```

Parameters:

lBasicOp: a basic operation the current user is wishing to perform (i.e. Delete)
vContextData: a variant array holding relevant business objects or other information.

Example:

```
Select Case lOperation
Case cmWorkOnClaim
    IsOperAuthorized = EvalClaimRules(cmView, vContextData) And _
        EvalClaimRules(cmEdit, vContextData)
```

EvalFileNoteRules ()

This API references business rules for FileNote security checking and returns a boolean if rules are met.

Syntax:

```
Private Function EvalFileNoteRules(lBasicOp As cmBasicOperations, vContextData
As Variant) As Boolean
End Function
```

Parameters:

lBasicOp: a basic operation the current user is wishing to perform (i.e. Delete)
vContextData: a variant array holding relevant business objects or other information.

Example:

```
Select Case lOperation
Case cmDeleteFileNote
    IsOperAuthorized = EvalFileNoteRules(cmDelete, vContextData)
```

EvalFormsCorrRules ()

This API references business rules for Forms and Corr security checking and returns a boolean if rules are met.

Syntax:

```
Private Function EvalFormsCorrRules(lBasicOp As cmBasicOperations) As Boolean
End Function
```

Parameters:

lBasicOp: a basic operation the current user is wishing to perform (i.e. Delete)

Example:

```
Select Case lOperation
Case cmMaintainFormsCorr
    IsOperAuthorized = EvalFormsCorrRules(cmEdit) And _
        EvalFormsCorrRules(cmDelete) And _
        EvalFormsCorrRules(cmAdd)
```

EvalOrgRules ()

This API references business rules for Event Processor security checking and returns a boolean if rules are met.

Syntax:

```
Private Function EvalOrgRules(lBasicOp As cmBasicOperations) As Boolean
End Function
```

Parameters:

lBasicOp: a basic operation the current user is wishing to perform (i.e. Delete)

Example:

```
Select Case lOperation
Case cmMaintainOrg
    IsOperAuthorized = EvalOrgRules(cmAdd) And _
        EvalOrgRules(cmEdit) And _
        EvalOrgRules(cmDelete)
```

EvalRunApplicationRules ()

This API references business rules for running the application and returns a boolean if rules are met.

Syntax:

```
Private Function EvalRunApplicationRules(lBasicOp As cmBasicOperations) As  
Boolean  
10 End Function
```

Parameters:

```
lBasicOp: a basic operation the current user is wishing to perform (i.e.  
Delete)
```

Example:

```
Select Case lOperation  
Case cmRunApplication  
20 IsOperAuthorized = EvalRunApplicationRules(cmExecute)
```

EvalRunEventProcRules ()

This API references business rules for Event Processor security checking and returns a boolean if rules are met.

Syntax:

```
Private Function EvalRunEventProcRules(lBasicOp As cmBasicOperations) As  
Boolean  
End Function
```

Parameters:

```
lBasicOp: a basic operation the current user is wishing to perform (i.e.  
Delete)
```

Example:

```
Select Case lOperation  
Case cmRunEventProcessor  
35 IsOperAuthorized = EvalRunEventProcRules(cmExecute)
```

EvalTaskTemplateRules ()

This API references business rules for Task Template security checking and returns a boolean if rules are met.

Syntax:

```
Private Function EvalTaskTemplateRules(lBasicOp As cmBasicOperations) As
Boolean
10 End Function
```

Parameters:

```
lBasicOp: a basic operation the current user is wishing to perform (i.e.
Delete)
15
```

Example:

```
Select Case lOperation
Case cmMaintainTaskLibrary
20 IsOperAuthorized = EvalTaskTemplateRules(cmAdd) And _
EvalTaskTemplateRules(cmEdit) And _
EvalTaskTemplateRules(cmDelete)
```

EvalUserProfileRules ()

This API references business rules for Task Template security checking and returns a boolean if rules are met.

Syntax:

```
Private Function EvalUserProfileRules(lBasicOp As cmBasicOperations,
vContextData As Variant) As Boolean
30 End Function
```

Parameters:

```
lBasicOp: a basic operation the current user is wishing to perform (i.e.
Delete)
35 vContextData: a variant array holding relevant business objects or other
information.
```

Example:

```
40 Select Case lOperation
Case cmIsRelativeOf
IsOperAuthorized = EvalUserProfileRules(cmView, vContextData) And
-
EvalUserProfileRules(cmAdd, vContextData) And _
```

```

EvalUserProfileRules(cmEdit, vContextData) And
-
EvalUserProfileRules(cmDelete, vContextData)

```

5 **GetUserId ()**

Returns the login name/user id of the current user.

Syntax:

```

10      Public Function GetUserId() As String
      End Function

```

Example:

```

      Dim sUserId as String
      sUserId = GetUserId

```

15 **IsOperAuthorized ()**

This API references business rules and returns a boolean determining whether the user has security privileges to perform a certain operation.

Syntax:

```

20      Public Function IsOperAuthorized(vMsg, as variant, nOperation as cmOperations,
      vContext As Variant) As Boolean
      End Function

```

Parameters:

```

25      vMsg: the standard architecture message
      nOperation: an enumeration containing name of operation to be checked.
      vContext: a variant array holding relevant business objects or other
      information.

```

30

Example:

```

      Dim bCanIdoThis As Boolean
      bCanIdoThis = objArch.SecurityMan.IsOperAuthorized(vMsg,aOperationName,
      vContext)
35      TlbEditIcon.Enabled = bCanIdoThis

```

OverrideUser ()

Re-initializes for a different user.

40

Syntax:

```

      Public Sub OverrideUser(Optional sUserId As String, Optional dictRoles As
      CDictionary, Optional dictSubs As CDictionary)
      End Function

```

Parameters:

5 sUserId:
 dictRoles:
 dictSubs:

Example:

10 Dim x As New CTechArch
 x.SecurityMan.OverrideUser "Everyone", New CDictionary, New CDictionary

15

CODES FRAMEWORK

General Requirements

20 Separate tables (CodesDecodes) are Created for storing the static values.

Only the references to codes/decodes are stored in business tables (e.g., Task) which utilize these values. This minimizes the size of the business tables, since storing a Code value takes much less storage space than its corresponding
25 Decode value (e.g., For State, "AL" is stored in each table row instead of the string "Alabama").

CodeDecodes are stored locally on the client workstation in a local DBMS. On
Application startup, a procedure to ensure the local tables are in sync with the
30 central DBMS is performed.

Infrastructure Approach

The present invention's Code Decode Infrastructure 600 Approach outlines the method of physically modeling codes tables. The model allows codes to be
5 extended with no impact to the physical data model and/or application and architecture. Figure 6 shows the physical layout of CodeDecode tables according to one embodiment of the present invention.

Infrastructure

- 10 The physical model of the CodeDecode infrastructure 600 does the following:
- Supports relational functionality between CodeDecode objects;
 - Supports extensibility without modification to the DBMS or Application Architecture;
 - 15 Provides a consistent approach for accessing all CodeDecode elements; and
 - Is easily maintainable.

- These generic tables are able to handle new categories, and modification of
20 relationships without a need to change the DBMS or CodeDecode Application Architecture.

- Benefits of this model are extensibility and maintainability. This model allows for the modifications of code categories without any impact to the DBMS or the
25 Application Architecture code. This model also requires fewer tables to maintain. In addition, only one method is necessary to access CodeDecodes.

Table Relationships and Field Descriptions:

(pk) indicates a Primary Key

30

Code_Category 602

- C_Category (pk): The category number for a group of codes
- C_Cache (currently not utilized): Can indicate whether the category should be cached in memory on the client machine
- T_Category: A text description of the category (e.g., Application Task Types, Claim Status, Days of Week)
- D_Last_Update: The date any data within the given category was last updated; this field is used in determining whether to update a category or categories on the local data base

Relationships

- A one-to-many relationship with the table Code (i.e., one category can have multiple codes)

Code 604

- C_Category (pk): The category number for a group of codes
- C_Code (pk): A brief code identifier (up to ten characters; the current maximum length being used is five characters)
- D_Effective: A date field indicating the code's effective date
- D_Expiration: A date field indicating the code's expiration date (the default is January 1, 2999)

Relationships

- A many-to-one relationship with Code_Category 602 (described above)
- A one-to-many relationship with Code_Relations 606 (a given category-and-code combination can be related to multiple other category-and-code combinations)

Code_Relations 606

- C_Category1 (pk): The first category
- C_Code1 (pk): The first code
- C_Category2 (pk): The related category

- C_Code2 (pk): The related code

Relationships

- A many-to-one relationship with the Code table (each category and code in the Code table can have multiple related category-code combinations)

5

Code_Decode 608

- C_Category (pk): The category number for a group of codes
- C_Code (pk): A brief code identifier (up to ten characters; the current maximum length being used is five characters)
- N_Lang_ID (pk): A value indicating the local language setting (as defined in a given machine's Regional Settings). For example, the value for English (United States) is stored as 0409. Use of this setting allows for the storage and selection of text code descriptions based on the language chosen
- T_Short_Desc: An abbreviated textual description of C_Code
- T_Long_Desc: A full-length textual description of C_Code—what the user will actually see (e.g., Close Supplement – Recovery, File Note, Workers Compensation)

10

15

20

Localization Support Approach

25 *Enabling Localization*

Codes have support for multiple languages. The key to this feature is storing a language identifier along with each CodeDecode value. This Language field makes up a part of the compound key of the Code_Decode table. Each Code API lookup includes a system level call to retrieve the Language system variable.

30 This value is used as part of the call to retrieve the values given the correct language.

Maintaining Language Localization Setting

A link to the Language system environment variable to the language keys is stored on each CodeDecode. This value is modified at any time by the user simply by editing the regional settings User Interface available in the Microsoft Windows Control Panel folder.

Codes Expiration Approach

Handling Time Sensitive Codes becomes an issue when filling controls with a list of values. One objective is to only allow the user to view and select appropriate entries. The challenge lies in being able to expire Codes without adversely affecting the application. To achieve this, consideration is given to how each UI will decide which values are appropriate to show to the user given its current mode.

The three most common UI modes that affect time sensitive codes are Add Mode, View Mode, and Edit Mode.

Add Mode

In Add Mode, typically only valid codes are displayed to the user as selection options. Note that the constant, `cmValidCodes`, is the default and will still work the same even when this optional parameter is omitted.

```
Set colStates = objArch.CodesMan.FillControl(frmCurrentForm.cboStates,  
cmCatStates,  
cmLongDecode, cmValidCodes)
```

View Mode

In View Mode, the user is typically viewing results of historical data without direct ability to edit. Editing selected historical data launches another UI. Given this the controls are filled with valid and expired codes, or in other words, non-pending codes.

```
Set colStates = objArch.CodesMan.FillControl(frmCurrentForm.cboStates,  
cmCatStates,  
cmLongDecode, cmNonPendingCodes)
```

Edit Mode

In Edit Mode, changes are allowed to valid codes but also expired codes are displayed if already assigned to the entity.

```
Dim colAssignedCodes As New cCollection  
colAssignedCodes.Add HistoricalAddress.State  
Set colStates = objArch.CodesMan.FillControl(frmCurrentForm.cboStates,  
cmCatStates,  
cmLongDecode, cmValidCodes, colAssignedCodes)
```

Updating Local CodeDecodes

The Local CodeDecode tables are kept in sync with central storage of CodeDecodes. The architecture is responsible for making a check to see if there are any new or updated code decodes from the server on a regular basis. The architecture also, upon detection of new or modified CodeDecode categories, returns the associated data, and performs an update to the local database. Figure 7 is a logic diagram for this process 700.

After an API call, a check is made to determine if the Arch is initialized 702. If it is a check is made to determine if the Freshness Interval has expired 704. If the Freshness Interval has not expired, the API call is complete 706. However, if either the Arch is not initialized or the Freshness Interval has expired, then the “LastUpdate” fields for each category are read from the CodeDecode and passed to the server 708. Then new and updated catagories are read from the database 710. Finally the Local database is updated 712.

Code Access APIs

The following are APIs located on the interface of the Arch Object 200 named CodesMan 500.

GetCodeObject(nCategory, sCode);
GetCategoryCodes(nCategory);

FillControl(ctlControl, nCategory, nFillType, [nCodeStatus],
[colAssignedCodes]).

GetCodeObject: Returns a valid CCode object given a specific category and code.

Syntax:

GetCodeObject(nCategory, sCode)

Parameters:

nCategory: The integer based constant which classified these CodeDecodes from others.

sCode: A string indicating the Code attribute of the CodeDecode object.

Example:

```
fzmCurrentForm.lblState = objArch.CodesMan.GetCodeObject (cmCatStates,
"IL").LongDecode
```

GetCategoryCodes: Returns a collection of CCode objects given a valid category

Syntax:

GetCategoryCodes(nCategory)

Parameters:

5 *nCategory*: The integer based constant which classified these CodeDecodes from others.

Example:

```
10        Dim colMyStates As CCollection
         Set colMyStates = objArch.CodesMan.GetCategory(cmCatStates)
```

FillControl: This API is used to fill listboxes or comboboxes with values from a list of CodeDecodes. Returns a collection for subsequent lookups to Code objects used to fill controls.

15 *Syntax:*

```
         FillControl(ctlControl, nCategory, nFillType, [nCodeStatus], [colAssignedCodes])
```

20 *Parameters:*

ctlControl: A reference to a passed in listbox or combobox.
 nCategory: The integer based constant which classified these CodeDecodes from others.
25 *nFillType*: The attribute of the CodeDecode which you want to fill. Valid values include:

```
         cmCode
         cmShortDecode
         cmLongDecode
```

30 *nCodeStatus*: Optional value which filters the Code Decodes according to their Effective and Expiration dates. Valid constants include the following:

```
         cmAllCodes        Pending + Valid + Expired Codes
         cmPendingCodes    Codes whose effective date is greater than the
         current date
35        cmValidCodes       Not Pending or Expired Codes
         cmExpiredCodes    Codes whose expired date is greater than the current
         date
         cmNonPendingCodes Valid + Expired Codes
         cmNonValidCodes   Pending + Expired Codes
40        cmNonExpiredCodes Pending + Valid Codes
```

colAssignedCodes: Used when filling a control which should fill and include assigned values.

Example:

```
45        'Declare an instance variable for States collection on object
         Private colStates As CCollection
```

‘Call FillControl API, and set local collection inst var to collection of codes which were used to fill the control. This collection will be used for subsequent lookups.

```
Set colStates = objArch.CodesMan.FillControl(frmCurrentForm.cboStates,  
cmCatStates, cmLongDecode)
```

‘Below shows an example of looking up the Code value for the currently selected state.

```
With frmCurrentForm.cboStates  
If .ListIndex > -1 Then  
Dim objCode As CCode  
Set objCode = colStates(.ItemData(.ListIndex))  
sStateCode = objCode.Code  
End If  
End With
```

Relational Codes Access APIs

Code objects returned via the “GetCodeObject” or “GetCategoryCodes” APIs can have relations to other code objects. This allows for functionality in which codes are associated to other individual code objects.

The APIs used to retrieve these values are similar to those on the CodesMan interface. The difference, however is that the methods are called on the Codes object rather than the CodesManager interface: Listed below again are the APIs.

```
GetCodeObject(nCategory, sCode);
```

```
GetCategoryCodes(nCategory);
```

```
FillControl(ctlControl, nCategory, nFillType, [nCodeStatus],  
[colAssignedCodes]).
```

Given below is some sample code to illustrate how these APIs are also called on Code objects.

GetCodeObject Example:

```
Dim objBondCode As CCode  
Set objBondCode = objArch.CodesMan.GetCodeObject(cmCatLOB, "B")  
Dim objSuretyCode As CCode  
Set objSuretyCode = objBondCode.GetCodeObject(cmCatSupplement, "B01")
```

GetCategory Example:

```

5      Dim objBondCode As CCode
      Set objBondCode = objArch.CodesMan.GetCodeObject(cmCatLOB, "B")
      Dim colSupplements As CCollection
      Set colSupplements = objBondCode.GetCategory(cmCatSupplement)

```

FillControl Example:

```

10     Dim objBondCode As CCode
        Set objBondCode = objArch.CodesMan.GetCodeObject(cmCatLOB, "B")
        Dim colSupplements As CCollection
        Set colSupplements = objBondCode.FillControl(frmForm.cboSupplements,
15     cmCatSupplements,
        cmLongDecode)

```

MESSAGE LOGGING

- 20 The message logging architecture allows message logging in a safe and consistent manner. The interface to the message logging component is simple and consistent, allowing message logging on any processing tier. Both error and informational messages are logged to a centralized repository.
- 25 Abstracting the message logging approach allows the implementation to change without breaking existing code.

Best Practices

- 30 Messages are always logged by the architecture when an unrecoverable error occurs (i.e., the network goes down) and it is not explicitly handled. Message logging may be used on an as-needed basis to facilitate the diagnosis and fixing of SIRs. This sort of logging is especially useful at points of integration between classes and components. Messages logged for the purpose of debugging have a severity of Informational, so as not to be confused with legitimate error
- 35 messages.

Usage

A message is logged by calling the LogMessage() function on the architecture.

Description of Parameters:

vMsg: the standard architecture message

5 lSeverity: the severity of the message

sClassName: the name of the class logging the message

sMethodName: the name of the method logging the message

sVersion: the version of the binary file (EXE or DLL) that contains the method logging the message

10 lErrorNum: the number of the current error

sText: an optional parameter containing the text of the message. If omitted, the text will be looked up in a string file or the generic VB error description will be used.

15 sText: an optional parameter containing the text of the message. If omitted, the text will be looked up in a string file or the generic VB error description will be used.

lLoggingOptions : an optional parameter containing a constant specifying where to log the message (i.e., passing cmLogToDBAndEventViewer to LogMessage will log the error to the database and the event viewer.)

20 *Logging Levels*

Before a message is logged, its severity is compared to the log level of the current machine. If the severity of the message is less than or equal to the log level, then the message is logged.

25 Valid values for the log level are defined as an enumeration in VB. They include:

| Value | Name | Description | Example |
|-------|----------|---|--------------------------|
| 0 | CmFatal | A critical condition that closes or threatens the entire system | Application Server crash |
| 1 | CmSevere | A condition that closes or threatens a | Network failure |

| | | | |
|---|-----------------|---|---------------------------------|
| | | major component of the entire system | |
| 2 | CmWarning | A warning that something in the system is wrong but it does not close or threaten to close the system | Optimistic locking error |
| 3 | CmInformational | Notification of a particular occurrence for logging and audit purposes | Developer debugging information |

Example

```

    If Err.Number <> 0 Then
        ' log message
        Arch.LogMan.LogMessage(vMsg, cmSeverityFatal, "COrganizationCTLR",
5      "InitForm",
                                GetVersion(), Err.Number, Err.Description)

        ' re-raise the error
        Err.Raise Err.Number
    End If
10

```

Database Log

The database log table is composed of the following fields:

| | | |
|----|-------------------|---|
| 15 | Field Name | Description |
| | N_MSG_ID | Unique ID of the message |
| | D_MSG | Date the message occurred |
| | C_ERR_SEV | Severity of the error |
| | N_USER_ID | Name of user when error occurred |
| | N_MACH_ID | Name of the machine that the error occurred on |
| | M_CLASS | Name of the class that the error occurred in |
| | M_METHOD | Name of the method that the error occurred in |
| | N_CMPNT_VER | Version of the binary file that the error occurred in |
| | C_ERR | Number of the error |
| | T_MSG | Text of the message |

Local Log

Messages are always logged to the application server's Event Log; however this is not necessarily true for the database as noted by the optional parameter passed to LogMessage, ILoggingOptions. An administrator with the appropriate access rights can connect to the MTS application server remotely and view its Event Log. Only one MTS package contains the Event Log Component, so that errors will all be written to the same application server Event Log.

Events logged via Visual Basic always have “VBRuntime” as the source. The Computer field is automatically populated with the name of the computer that is logging the event (i.e., the MTS application server) rather than the computer that generated the event (typically a client computer).

The same event details that are written to the database are formatted into a readable string and written to the log. The text “The VB Application identified by ... Logged:” is automatically added by VB; the text that follows contains the details of the message.

DATA ACCESS

All but a few exceptional cases use the “ExecuteQuery” API. This API covers singular database operations in which there exists a single input and a single output. Essentially should only exclude certain batch type operations.

The Data Access Framework serves the purposes of performance, consistency, and maintainability.

Performance

The “ExecuteQuery” method incorporates usage patterns for using ADO in an efficient manner. Examples of these patterns include utilization of disconnected recordsets, and explicitly declaring optional parameters which result in the best performance.

Consistency

This method provides a common interface for development of data access. Given a simple and stable data access interface, best practices can be developed and disseminated.

Maintainability

Since the method is located in a single location, it is very modularized and can be maintained with little impact to its callers.

5

Application servers often use the ActiveX Data Objects (ADO) data access interface. This allows for a simplified programming model as well as enabling the embodiments to utilize a variety of data sources.

10

The “ExecuteQuery” Method

Overview

The “ExecuteQuery” method should be used for most application SQL calls.

15

This method encapsulates functionality for using ADO in a effective and efficient manner. This API applies to situations in which a single operation needs to be executed which returns a single recordset object.

Syntax

20

```
Set obj = ExecuteQuery(vMsg, nTranType, sSQL, [nMaxRows], [adoTransConn],  
[args])
```

Parameters

25

vMsg

This parameter is the TechArch struct. This is used as a token for information capture such as performance metrics, error information, and security.

30

nTranType

An application defined constant which indicates which type of operation is being performed. Values for this parameter can be one of the following constants:

35

cmSelect
cmSelectLocal

cmUpdate
cmInsert
cmDelete

5 sSQL

String containing the SQL code to be performed against the DBMS.

nMaxRows (Optional)

Integer value which represent the maximum number of records that the
10 recordset of the current query will return.

adoTransConn (Optional)

An ADO Connection object. This is created and passed into execute
query for operations which require ADO transactional control (see “Using
15 Transactions” section)

args (Optional)

A list of parameters to be respectfully inserted into the SQL
statement.
20

Implementation

In one embodiment of the present invention the “ExecuteQuery” method resides
within the MservArch.bas file. This file should be incorporated into all
25 ServerComponent type projects. This will allow each server component access to
this method.

Note: Since this method is a public method in a “bas” module, it is globally
available from anywhere in the project.

30

```
Public Function ExecuteQuery(vMsg As Variant, _  
    nTranType As TranTypes, _  
    sSQL As String, _  
    Optional nMaxRows As Integer = 0, _  
    Optional adoTransConn As ADODB.Connection, _  
    Optional colArguments As CCollection) As Variant  
On Error GoTo ErrorHandler  
Const cmMethodName As String = "ExecuteQuery"  
40 StartTimeLogger vMsg, cmTimerIdDBTotal, cmClassName, cmMethodName
```

```
'find out if this call is an isolate operation or
'part of an ADO (not MTS) transaction
Dim isAtomicTrans As Boolean
5 isAtomicTrans = adoTransConn Is Nothing

Dim nRecordsAffected As Integer
Dim adoRS As New ADO.DB.Recordset
Dim adoConn As ADO.DB.Connection
10 Dim lAuxErrNumber As Long

'open a new connection or keep using the passed in connection
Set adoConn = IIf(isAtomicTrans, New ADO.DB.Connection, adoTransConn)

15 If isAtomicTrans Then
    adoConn.Open cmODBC_Connect

    'ADO will wait indefinitely until the execution is complete during
    performance
    testing
    20 #If IsPerfTest Then
        adoConn.CommandTimeout = 0
    #End If
End If
25 'Make sure date args are formatted for DB2 if appropriate
If Not colArguments Is Nothing Then _
    Set colArguments = FormatArgsForDB2(colArguments)

'merge the passed in arguments with the SQL string
30 sSQL = MergeSQL(sSQL, colArguments)

Debug.Print Time & ": " & sSQL

'execute the SQL statement depending on the transaction type
35 Select Case CStr(nTranType)
    Case cmSelect
        adoRS.MaxRecords = nMaxRows
        adoRS.CursorLocation = adUseClient
        adoRS.Open sSQL, adoConn, adOpenForwardOnly, adLockReadOnly,
40 adCmdText
        Set adoRS.ActiveConnection = Nothing
        Set ExecuteQuery = adoRS
    Case cmSelectLocal
        adoRS.MaxRecords = nMaxRows
        45 adoRS.CursorLocation = adUseClient
        adoRS.Open sSQL, adoConn, adOpenStatic, adLockBatchOptimistic,
        adCmdText
        Set adoRS.ActiveConnection = Nothing
        Set ExecuteQuery = adoRS
50 Case cmInsert
    Set adoRS = adoConn.Execute(sSQL, nRecordsAffected, adCmdText)
    If nRecordsAffected <= 0 Then Err.Raise cmErrQueryInsert
    Set adoRS = Nothing
```

```

        ExecuteQuery = nRecordsAffected
    Case cmUpdate, cmDelete
        Set adoRS = adoConn.Execute(sSQL, nRecordsAffected, adCmdText)
        If nRecordsAffected <= 0 Then Err.Raise cmErrOptimisticLock
        Set adoRS = Nothing
        ExecuteQuery = nRecordsAffected
    Case cmSpFileNote
        Set adoRS = adoConn.Execute(sSQL, nRecordsAffected, adCmdText)
        Set adoRS = Nothing
    Case Else
        Err.Raise cmErrInvalidParameters
    End Select

    StopTimeLogger vMsg, cmTimerIdDBTotal, cmClassName, cmMethodName
    Exit Function

ErrorHandler:
    Dim objArch As Object
    Set objArch = CreateObject("cmArch.CTechArch")

    Select Case CStr(Err)
        Case cmErrQueryInsert, cmErrOptimisticLock, cmErrInvalidParameters
            'Raise error
            Err.Raise Err

        Case cmErrDSNNotFound
            Dim sMsgText As String
            sMsgText = "Data Source Name not found." & vbCrLf & "(" & _
                CStr(objArch.RegMan.GetServerDSN) & " )"

            ' Create a new message log and log the message
            objArch.LogMan.LogMessage vMsg, cmSeverityFatal, cmClassName,
            cmMethodName,
                GetVersion(), cmErrDSNNotFound, sMsgText,
            cmLogToEventViewerOnly

        Case Else
            lAuxErrNumber = adoConn.Errors(0).NativeError 'The error code is
            stored since
            when closing the
            connection it will
            be lost
            If adoConn.State <> adStateClosed Then adoConn.Close

            Err.Raise cmErrDSNNotFound, , sMsgText
        Case Else
            ' Create a new message log and log the message
            objArch.LogMan.LogMessage vMsg, cmSeverityFatal, cmClassName,
            cmMethodName,
                GetVersion(), Err.Number, Err.Description,
            cmLogToEventViewerOnly
    End Select

```

```

1         lAuxErrNumber = adoConn.Errors(0).NativeError 'The error code is
stored since
                                when closing the
5         connection it will
                                be lost
                                If adoConn.State <> adStateClosed Then adoConn.Close
                                Err.Raise lAuxErrNumber
                                End Select
10        End Function

```

Selecting Records

ExecuteQuery utilizes disconnected recordsets for “Select” type statements. This requires that the clients, particularly the CCA’s contain a reference to ADOR, ActiveX Data Object Recordset. This DLL is a subset of the ADO DB DLL. ADOR contains only the recordset object.

Using disconnected recordsets allows marshalling of recordset objects from server to client. This performs much more efficiently than the variant array which is associated with using the “GetRows” API on the server. This performance gain is especially apparent when the application server is under load of a large number of concurrent users.

Sample from Client Component Adapter (CCA)

```

Dim vAns as Variant
Dim adoRS As ADOR.Recordset
Set adoRS = objServer.PerformSelect(vMsg, nId)
30 If objRS.EOF Then
    Set objRS = Nothing
    Exit Function
End If

35 vAns = adoRS.GetRows
Set adoRS = Nothing

'Marshall vAns into objects
...
40

```

Sample from Server Component

```
Private Const cmCustSQL = "Select * from Customer where id = ?"
```

```

Public Function PerformSelect(vMsg, nId) as Variant
    Dim colArgs as CCollection
    Set colArgs = New Ccollection
5    colArgs.Add nId
    Set PerformSelect = ExecuteQuery(vMsg, cmSelect, sCustSQL, , , colArgs)
End Function

```

Code Clip from ExecuteQuery (Select Section)

```

10    Case cmSelect
        adoRS.MaxRecords = nMaxRows
        adoRS.CursorLocation = adUseClient
        adoRS.Open sSQL, adoConn, adOpenForwardOnly, adLockReadOnly, adCmdText
15    Set ExecuteQuery = adoRS
    ...

```

Inserting Records

Inserting records requires certain information pertaining to optimistic locking. On the server a unique value is requested to indicate the last time modified. This unique value is returned back to the requestor such that it can be used to later database operations.

Sample from Client Component Adapter (CCA)

```

25    Dim vNewTS as Variant
    vNewTS = objServer.PerformInsert(vMsg, nId, sName)
    'Set object's TimeStamp to vNewTS
30

```

Sample from Server Component

```

Private Const cmCustInsertSQL = "Insert Customer (nId, Name, LastUpdated)
Values(?, '?', ?)"

35    Public Function PerformInsert(vMsg, nId, sName) As Variant
        Dim lCurrTS as Long
        lCurrTS = GetTimeStamp
        Dim colArgs as CCollection
        Set colArgs = New Ccollection
40        colArgs.Add nId
        colArgs.Add sName
        colArgs.Add lCurrTS
        ExecuteQuery(vMsg, cmInsert, sCustInsertSQL, , , colArgs)
        PerformInsert = lCurrTS
45

```


Code Clip from ExecuteQuery (Insert Section)

```

Case cmInsert
    Set adoRS = adoConn.Execute(sSQL, nRecordsAffected, adCmdText)
5    If nRecordsAffected <= 0 Then Err.Raise cmErrQueryInsert
    Set adoRS = Nothing
    ExecuteQuery = nRecordsAffected

```

10

Updating Records

Updating records requires certain information pertaining to optimistic locking.

On the server a unique value is requested to indicate the last time modified. Also

15 the last read timestamp is used to validate, during the update, that the record has not been modified since last time read.

Sample from Client Component Adapter (CCA)

```

20 Dim vNewTS as Variant
vNewTS = objServer.PerformUpdate(vMsg, 1, 'Rick', 8907654)
'Set object's TimeStamp to vNewTS

```

Sample Code Clip from Server Component

```

25 Private Const cmCustUpdateSQL = _
    "Update Customer Set Name = '?', LastUpdated = ? " & _
    "Where Id = ? " & _
    "And LastUpdated = ? "

Public Function PerformUpdate(vMsg, nId, sName, lLastTS) As Variant
30    Dim lCurrTS as Long
    lCurrTS = GetTimeStamp
    Dim colArgs as CCollection
    Set colArgs = New CCollection
    colArgs.Add sName
35    colArgs.Add lCurrTS
    colArgs.Add nId
    colArgs.Add lLastTS
    PerformUpdate = ExecuteQuery(vMsg, cmUpdate, sCustUpdateSQL, , , colArgs)
    PerformUpdate = lCurrTS
40 End Function

```

Code Clip from ExecuteQuery (Update Section)

```

Case cmUpdate
    Set adoRS = adoConn.Execute(sSQL, nRecordsAffected, adCmdText)
45    If nRecordsAffected < 0 Then Err.Raise cmErrOptimisticLock
    ExecuteQuery = nRecordsAffected

```

Deleting Records

5

In deleting records the last read timestamp is used to validate, during the delete, that the record has not been modified since last time read.

Sample from Client Component Adapter (CCA)

10

```
Dim vAns as Variant
vAns = objServer.PerformDelete(vMsg, nId ,lLastTS)
```

Sample from Server Component

15

```
Private Const cmCustDeleteSQL = _
"Delete From Customer " & _
"Where Id = ? " & _
"And LastUpdated = ? "

Public Function PerformDelete(vMsg, nId lLastTS) As Variant
    Dim colArgs as CCollection
    Set colArgs = New Ccollection
    colArgs.Add nId
    colArgs.Add lLastTS
    PerformDelete = ExecuteQuery(vMsg, cmDelete, cmCustDeleteSQL)
Exit Function
```

25

Code Clip from ExecuteQuery (Delete Section)

30

```
Case cmDelete
    Set adoRS = adoConn.Execute(sSQL, nRecordsAffected, adCmdText)
    If nRecordsAffected < 0 Then Err.Raise cmErrOptimisticLock
    ExecuteQuery = nRecordsAffected
```

35

DATABASE LOCKING FRAMEWORK

Database Locking ensures the integrity of the database in a multi-user environment. Locking prevents the common problem of lost updates from multiple users updating the same record.

40

Solution Options

Pessimistic Locking

- This policy of locking allows the first user to have full access to the record while following users are denied access or have read only access until the record is unlocked. There are drawbacks to this method of locking. It is a method that is prone to deadlocks on the database as well poor performance when conflicts are encountered.

Optimistic Locking

- The optimistic approach to record locking is based on the assumption that it is not normal processing for multiple users to both read and update records concurrently. This situation is treated as exceptional processing rather than normal processing. Locks are not actually placed on the database at read time. A timestamp mechanism is used at time of update or delete to ensure that another user has not modified or deleted the record since you last read the record.

- A preferred embodiment of the present invention uses an optimistic locking approach to concurrency control. This ensures database integrity as well as the low overhead associated with this form of locking. Other benefits to this method are increased availability of records to multiple users, and a minimization of database deadlocks.

- Table candidates for concurrency control are identified during the “Data Modeling Exercise”. The only table which is updated concurrently is the Optimistic Locking mechanism. Once these are identified, the following is added to the application.

Add “N_Last_Updt” field to table in database;

Error Handling routines on those operations which modify or delete from this table; and

Display/Notification to user that the error has occurred.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2

Usage

The chart below describes the roles of the two basic types of components to enable optimistic locking.

- 5 Assumption: The optimistic locking field is of type Date and is named “N_Last_Updt”

| | Client Components | Server Components |
|--------------------|---|---|
| Read Access | Store N_Last_Updt value in the business object for use in possible updates or deletes. | Retrieve data (Always including N_Last_Updt field). SELECT Id, FirstName, N_Last_Updt FROM Customer WHERE id = 10; |
| Inserts | Normal | Dim lCurrTS As Double lCurrTS = GetTimeStamp INSERT INTO Customer (Id, FirstName, N_Last_Updt) VALUES (1, “Rick”, lCurrTS); Return new timestamp (lCurrTS) as well as new Id |
| Updates | Pass previously read timestamp to identify whether row was modified. This is in addition to a unique identifier and whatever data needs to be updated. Handle exception if record has been previously modified. Notify user of conflict. Rollback any changes. | Dim lCurrTS As Double lCurrTS = GetTimeStamp UPDATE Customer SET firstName = “Richard”, N_Last_Updt = lCurrTS WHERE id = 1 AND LastUpdate = lastReadTimestamp; If no rows are affected, handle and propagate error back out to the client. Return new timestamp (lCurrTS) |
| Deletes | Pass previously read timestamp to identify whether row was modified. This is in addition to a unique identifier Handle exception if record has been previously modified. Notify user of conflict. Rollback any changes. | DELETE Customer WHERE id = 1 AND N_Last_Updt = lastReadTimestamp; If no rows are affected, handle and propagate error back out to the client. |

LARGE RESULT SET

When retrieving records from a database, if the search criteria is too broad, the amount of data required to be retrieved from the database and passed across the network will affect user perceived performance. Windows requesting such data will be slow to paint and searches will be slow. The formation of the database queries is made such that a workable amount of data is retrieved. There are a few options for addressing the problems that occur from large result sets. The options are given below in order of preference.

Redesign the interface/ controller to return smaller result sets. By designing the controllers that present the database queries intelligently, the queries that are presented to the database server do not return a result set that is large enough to affect user perceived performance. In essence, the potential to retrieve too many records indicates that the UIs and the controllers have been designed differently. An example of a well designed Search UI is one where the user is required to enter in a minimum search criteria to prevent an excessively large result set.

Have Scrollable Result Sets. The scrolling retrieval of a large result set is the incremental retrieval of a result subset repeated as many times as the user requests or until the entire result set is obtained. Results are retrieved by the Bounded Query Approach where the first record is determined by a where clause with calculated values.

Scrollable Result Set Client requirements

Preferred UI

The preferred displays are as follows:

Returned results are displayed in a GreenTree List Box;

An action button with the label **More...** is provided for the user to obtain the remaining results;

- 5 The More button is enabled when the user has performed an initial search and there are still results to be retrieved;

The More button is disabled when there are no more results to retrieve;

- 10 The List Box and the Action button is contained within a group box to provide a visual association between the button and the List Box.

Bounded Query

- 15 Queries that are implemented with the limited result sets are sent to the server. The server implements the executeQuery method to retrieve the recordset as usual. Limited result queries have an order by clause that includes the business required sort order along with a sufficient number of columns to ensure that all rows can be uniquely identified. The recordset is limited by the nMaxRows
- 20 variable passed from the client incremented to obtain the first row of the next result set. The return from the component is a recordset just the same as with a query that is not limited. The CCA 208 creates the objects and passes these back to the controller 206 . The Controller 206 adds this returned collection of object to its collection of objects (an accumulation of previous results) and while doing
- 25 so will performs the comparison of the last object to the first object of the next row. The values necessary to discriminate the two rows are added to the variant array that is necessary to pass to the component for the subsequent query.

- 30 The Controller 206 on the client retains the values for nMaxRows, the initial SQL statement, and array of values to discern between the last row of the previous query and the first row of the next query. The mechanism by which the controller

206 is aware that there are more records to retrieve is by checking the number of results is one greater than the max number of rows. To prevent the retrieval of records past the end of file, the controller 206 disables these functions on the UI. For example, a command button **More** on the UI, used to requested the data, is disabled when the number of objects returned is less than $nMaxRows + 1$.

Application responsibility

Server

10 The Server component is responsible for creating a collection of arguments and appending the SQL statement to add a where clause that will be able to discriminate between the last row of the previous query and the first row of the next.

15 **CCA**

 The CCA 208 processes the recordset into objects as in non limited queries. The CCA 208 forwards the variant array passed from the Controller 206 to identify the limited results.

20 **Controller**

 The controller 206 has the responsibility of disabling the **More** control when the end of file has been reached. The controller 206 populates the variant array (vKeys) with the values necessary to determine start of next query.

25 **Example**

 A CCA 208 is coded for a user defined search which has the potential to return a sizable result set. The code example below implements the Bounded Query approach.

30

 On the Server the developer codes the query as follows:


```

Public Function RetrieveBusinessObjects(vMsg As Variant, ByVal sSql As String,
ByVal nMaxRows As Integer, Optional ByVal vKeys As Variant) As Recordset
    On Error GoTo ErrorHandler

5      'Declare local constants
      Const cmMethodName As String = "RetrieveBusinessObjects"

      'Declare local variables
10     Dim cmClassName As String
      Dim colArgs As New CCollection

      'initialize instance variables
15     cmClassName = "CSRSTestComp"

      'fill argument collection
      Set colArgs = ArgumentsForBusinessObject(vKeys, sSql)

20     'increment nMaxRows to obtain row for comparison
      nMaxRows = nMaxRows + 1

      'ExecuteQuery
25     Set RetrieveBusinessObjects = ExecuteQuery(vMsg, cmSelectLocal, sQuery,
nMaxRows, , colArgs)

      'Tell MTS we're done
30     GetObjectContext.SetComplete
      Exit Function

ErrorHandler:
      Select Case Err.Number

35         Case Else
            Dim iResumeCode As Integer
            iResumeCode = GeneralErrorHandler(vMsg, cmServer, cmClassName,
cmMethodName)
40             Select Case iResumeCode
                Case cmErrorResume
                    Resume
                Case cmErrorResumeNext
                    Resume Next
                Case cmErrorExit
                    Exit Function
                Case Else
                    GetObjectContext.SetAbort
                    Err.Raise Err.Number
45             End Select
50         End Select
      End Function
End Function

```

To determine the additional where clause necessary to determine the starting point of the query, the following method is added:

```

Private Function ArgumentsForBusinessObject(vKeys As Variant, sSql As string )
As CCollection
60     Dim colArgs As CCollection
      Const cmGreaterThanWhereString As String = " ? > ? "
      Const cmGreaterThanOrEqualWhereString As String = " ? >= ? AND "

      ' initialize local variables
      Set colArgs = New CCollection

```

```
sSql = sSql + "WHERE"

With colArgs
5   If vKeys(0) <> Empty Then
       .Add ("N_TASK_TEMPL_ID")
       .Add (vKeys(0))

       End If
10  'If vKeys(1) <> Nothing Then
       '.Add value2 fieldName
       '.add vKeys(1)
       sSql = sSql + cmGreaterThanOrEqualWhereString
       'End If
15  'If vKeys(2) <> Nothing Then
       '.Add value3 fieldName
       '.add vKeys(2)
       sSql = sSql + cmGreaterThanOrEqualWhereString
       'End If
20  End With

'finalize SQL statement
sSql = sSql + cmGreaterThanWhereString

25  Set ArgumentsForBusinessObject = colArgs
End Function
```

On the CCA 208, allowance must be made for the passing of the vKeys

Public Function RetrieveBusinessObjects(vMsg As Variant, sSql As String,
nMaxRows As Integer, Optional ByVal vKeys As Variant) As CCollection

```
35  Set percmpComponent = New CSRSTestComp
    Dim i As Integer

    Set adoRS = percmpComponent.RetrieveBusinessObjects(vMsg, sSql, nMaxRows,
vKeys)

40  'convert recordset to business objects
    adoRS.MoveFirst
    Do Until adoRS.EOF
        Call ConvertToBusinessObject
        adoRS.MoveNext
45  Loop

    'return the collection of business objects
    Set RetrieveBusinessObjects = dictBusinessObject
    Set dictBusinessObject = New CCollection

50
```

End Function

- 5 The controller initiates the query and updates the variant array of keys and form
204 properties based on the return. In addition to the code shown for the example
 below, the More Control is enabled if the search is cleared.

```

10      'declare instance variables
      Private nMaxRows As Integer
      Dim interimResults As CCollection
      Dim vResults As CCollection
      Dim vKeys(3) As Variant

15      'declare Constants
      Private Const nDefaultAmount As Long = 50
      Private Const cmRetrieveBusinessObjectSQL = "SELECT * FROM NODE_RULE ORDER BY
      _ N_TASK_TEMPL_ID"
  
```

During class initialization perform the following:

```

      Public Sub Class_init()

25          'obtain settings from registry
          nMaxRows = CInt(GetSetting(cmRegApp, cmRegArchSection,
          cmLimitedResultAmountKey, lDefaultAmount))

          Call resetSearch

30          Set objCCA = New {CCA class name}

      End Sub
  
```

Search reset functionality is kept outside of initialization so this may be called
 35 from other parts of the application.

```

      Public Sub resetSearch()
          Dim I as Integer
          Set vResults = New Ccollection
          For I = 0 To 3
40              Set vKeys(I) = Empty
          Next
          Set vKeys(0) = Empty
          frmCurrentForm.cmdMore.Enabled = True

45      End Sub

      Public Sub RetrieveBusinessObjects()
          Const cmMethodName As String = "retrieveBusinessObjects"
  
```

```

Call RetainMouse

' get arch message
Dim vMsg As Variant
5 vMsg = objApp.objArch.AsMsgStruct()

' call the component
Dim pair As CArchPair

10 'Declare local variables
Dim sSql As String
Dim colArgs As CCollection
Dim cmClassName As String

15 Set interimResults = objCCA.RetrieveBusinessObjects(vMsg,
cmRetrieveBusinessObjectSQL, nMaxRows, vKeys)

ctr = ProcessObjectCollection

20 'stop if size of return is less than the maximum
If ctr < nMaxRows + 1 Then frmCurrentForm.cmdMore.Enabled = False
' restore pointer
Screen.MousePointer = 1PrevPtr
End Sub

```

In order to retain the values to discriminate between the last row of the result set and the first row of the next the following method on the controller is used:

```

Private Function ProcessObjectCollection() As Integer
30 ' merge results with the instance variable for the collection
Dim ctr As Integer
ctr = 0
For Each element In interimResults
35 ctr = ctr + 1
'retain Keys for subsequent Queries
With element
Select Case ctr
Case nMaxRows
40 'store all values that may be used for row comparison
vKeys(0) = .NodeId

'add last object to collection
vResults.Add element

45 Case nMaxRows + 1
'last object only used for comparison
'If the proceeding value can be used to uniquely
'identify row then delete value from array
50 ' THERE SHOULD BE N - 1 nested If statements where N =
size of vKeys

```

```
'If .value2 <> vKeys(1) Then
    'vKeys(2) = Empty
    If .NodeId <> vKeys(0) Then vKeys(1) = Empty
'End If
Case Else
    vResults.Add element

End Select
End With
Next
ProcessObjectCollection = ctr
End Function
```

Operation of example with data

| Person | | | |
|------------|------------|--------|-----------|
| First Name | Last Name | Status | Unique ID |
| Joy | Andersen | Closed | 22 |
| Jay | Anderson | Open | 12 |
| John | Barleycorn | Closed | 512 |
| John | Barleycorn | Open | 32 |
| Esther | Davidson | Open | 88 |
| David | Dyson | Closed | 98 |
| Bobby | Halford | Open | 234 |
| Steven | Jackowski | Closed | 4 |
| Kyle | Johnsen | Open | 65 |
| Jeff | Johansen | Open | 13 |
| Mary | Johnson | Closed | 24 |
| Larry | Olsen | Open | 21 |
| William | O'Neil | Closed | 29 |
| Jane | Pick | Open | 3285 |

For this example let $nMaxRows = 3$. The business case calls for the result set to be ordered by the last name, and developer knows that any row can be uniquely identified by the FirstName, LastName, and Unique ID fields so the initial SQL added as a constant in the controller should be;

```
SELECT * FROM Person ORDER BY LastName, FirstName,
Unique_ID
```

Initial Query

The first query is sent with an empty vKeys Array. When the server receives this query, the method **ArgumentsForBusinessObject** identifies the elements as

being empty and does not populate the colArgs. The query is executed with the initial SQL unchanged. The recordset of size nMaxRows + 1 is returned to the CCA 208 and processed the same as non-limited results. The CCA 208 returns the collection of objects to the controller 206. The controller 206 proceeds to

- 5 populate the vResults collection with the returned objects. vResults is the comprehensive collection of objects returned. When the last object of the first request is reached (at nMaxRows), the values are stored in vKeys as such;

vKeys(0) = LastName (Barleycorn)

vKeys(1) = FirstName (John)

- 10 vKeys(2) = Unique_ID (512)

When the First Object of the next request is reached (at nMaxRows +1), comparison of the object variables against the vKeys values is performed.

Because the last names match, vKeys(2) will not be deleted and no further checks are performed.

- 15 ***Subsequent Query***

The subsequent query will pass vKeys along with it. The server creates the collection of arguments from vKeys and append the sSql string in accordance.

The sSql statement that is passed to execute query is

- 20

```
SELECT * FROM Person ORDER BY LastName, FirstName,
Unique_ID WHERE ? >= ? AND ? >= ? AND ? > ?
```

This sSql and collection is included in the call to **ExecuteQuery** which merges the arguments with the string relying on the architecture method MergeSQL to complete the SQL statement.

- 25 The starting point of the recordset is defined by the WHERE clause and the limit is set by the nMaxRows value.

Query less restrictive WHERE criteria

After the second query the last row of the query is David Dyson and the next is Bobby Halford. Because the last name is different, vKeys will be empty except

- 30 for vKeys(0) = Dyson.

The **ProcessObjectCollection** will populate vKeys as follows when processing nMaxRows object:

vKeys(0) = LastName (Dyson)

vKeys(1) = FirstName (David)

5 vKeys(2) = Unique_ID (98)

After identifying the differences between vKeys values and the nMaxRows + 1 object the vKeys array is updated as follows:

vKeys(0) = LastName (Dyson)

10 vKeys(1) = Empty

vKeys(2) = Empty

The query that is returned from **ArgumentsForBusinessObject** is

15 SELECT * FROM Person ORDER BY LastName, FirstName,
Unique_ID WHERE ? > ?

and the colArgs possessing the fieldname FirstName and the value ("David").

ExecuteQuery merges the arguments with the sql statement as before and returns the value.

20 **Ending**

After the fifth iteration the result set will only possess 2 records. When the controller 206 processes the returned collection the counter returned from **ProcessObjectCollection** is less than nMaxRows + 1 which indicates that all records have been retrieved.

25

30

SECURITY FRAMEWORK

Implementation

Figure 8 shows a representation of the Security Framework 800 and its main components.

It can be seen from Figure 8 that the Security object 802 is present at the Client and a Security API is provided at the server. The Security object 802 provides one method responsible for authorizing any operation, being given the vMsg structure, an operation ID and an optional parameter describing the operation's context.

Client

User Authentication:

User authentication is handled via a method located in the Security object 802 called *IsOperAuthorized*. As the Application object loads, it calls the *IsOperAuthorized* method, with the operation being "Login", before executing further processing. This method subsequently calls a authentication DLL, which is responsible for identifying the user as an authorized user within the Corporate Security.

UI Controllers:

The UI Controllers limit access to their functions by restricting access to specific widgets through enabling and disabling them. The logic for the enabling and disabling of widgets remains on the UI Controller 206, but the logic to determine whether a user has access to a specific functionality is located in the Security object 802 in the form of business rules. The UI Controller 206 calls the *IsOperAuthorized* method in order to set the state of its widgets.

Server

Server security is implemented by restricting access to the data in three different ways:

Server Security Method

Server Components 222 call the *IsOperAuthorized* API in the Architecture before executing every operation. In all cases the Security object 802 returns a boolean, according to the user's access rights and the business rules

SQL Filtering

Includes security attributes, like claim sensitiveness or public/private file note, into the SQL statements when selecting or updating rows. This efficiently restricts the resulting data set, and avoids the return of restricted data to the client.

Description

Any GUI related security is implemented at the Client using the Security object 802. The information is available both at the Client Profile and Business Objects 207 which enables the security rules to be properly evaluated.

IsOperAuthorized is called to set widgets upon the loading of a UI or if there is a change of state within the UI.

User authentication always is used by the Application Objects 202 in order to validate user privilege to launch the application.

SQL Filtering is used in the cases where sensitive data must not even be available at the Client, or where there is a great advantage on reducing the size of the data set returned to the Client.

SQL Filtering is only used in very rare cases where performance is a serious concern. It is used carefully in order to avoid increased complexity and performance impacts because some queries can be cumbersome and embedding security on them could increase complexity even more.

5

Security Framework

10 *Overview*

The Security object 802 serves the purpose of holding hard coded business rules to grant or deny user access for various application functions. This information is returned to the UI controllers 206 which make the necessary modifications on the UI state. The ClientProfile object serves the purpose of caching user specific (and static) security information directly on the client. This information is necessary to evaluate the business rules at the Security object 802.

15

Relationships

20

Figure 9 shows the relationships between the security element and other elements.

Architecture Object

The TechArch object is responsible for providing access and maintaining the state of the ClientProfile 902 and Security objects 802. The ClientProfile object 902 is instantiated and destroyed in the TechArch's initialization and terminate methods, respectively. This object is maintained through an instance variable on the TechArch object.

30

CInitCompCCA

The CInitCompCCA object 904 provides two services to the architecture object 200, it serves as an access point to the CInitComp Server 906, and it Marshalls the query result set into a ClientProfile object 902.

CInitComp

The CInitComp server object 906 provides data access to the data that resides in the organization tables 908. This data is useful on the client to determine level of access to data based on hard coded business rules.

Organization Tables

The Organization tables 908 contain user, employee and unit information necessary to build the hierarchy of information necessary to determine level of access to sensitive information.

Client Profile

The ClientProfile object 902 serves the purpose of caching static, user specific security information directly on the client. This information is necessary to determine data access level of information to the user, which is accomplished by passing the necessary values to the Security object 802.

Security Object

The Security Object 802 contains business rules used to determine a user's access privileges in relation to specific functions. The object accepts certain parameters passed in by the various UI Controllers 206 and passes them to through the business rule logic which, in turn, interrogates the Client Profile object 902 for specific user information.

Client Profile

Attributes

- 5 The following are internal attributes for the Client Profile object 902. These attributes are not exposed to the application and should only be used by the Security object 802:

- sProfile:

10

This attribute is passed by the legacy application at start-up and contains the user's TSIDs, External Indicator, Count of Group Elements and Group Elements. It is marshalled into these attributes by request of the application objects.

15

- colSpecialUsers:

This attribute caches information from a table containing special users which do not fit into one of the described roles, such as Organization Librarian.

20

(e.g., Vice President or CEO of the corporation.)

- sTSId:

This is the current users' TSId, and it corresponds to his/her Windows NT Id.

25

It is used to get information about the current logged on user from the Organizational Tables 908.

30

- sEmployeeId:

This corresponds to the user's employee Id, as stored in the Organizational tables 908. It is used against the passed in employee Id, in order to check relationship between performers and the current user.

- sEmployeeName, sEmployeeFirst, sEmployeeMI and sEmployeeLast:

All these attributes correspond to the current user's name.

- dictClientPrivileges:

This attribute contains a collection of identifiers that indicate what role/authority an individual plays/possesses. This value is used to identify the static role of the logged in user.

These values are used for security business logic which grants or denies access based on whether the user is internal or external, or whether the user is in a given administrative role. Existing values are the following:

- SC - Indicates sensitive Claim authority
- CC - Indicates Change Claim status authority
- MT - Indicates maintain F&C Templates authority
- MO - Indicates maintain Organization authority
- MR - Indicates maintain Roles authority

The following are the proposed additions:

- TA - Indicates authority to execute Task Assistant
- FN - Indicates authority to execute FileNotes
- CH - Indicates authority to execute Claim History
- TL - Indicates authority to maintain Task Templates

- dictProxyList:

5 This attribute contains an employees' reporting hierarchy. It is used to determine whether the current user/employee has permission to perform some action based on his/her relationship to other users/employees within their hierarchy. A business example of this is the case of a supervisor, who has rights to view information that his/her subordinates have access to. The relationship API's make use of dictProxyList to determine if the user assigned to the information is super or subordinate of the current user.

- boolInternal:

15 This attribute indicates whether the logged in user is external or internal. It is also marshalled from the sProfile attribute, passed in by the legacy application.

Public Methods

20 The following are the APIs exposed by the Client Profile object. These APIs are used for security checking by the Security object and should not be used by the developers in any portion of the application.

- GetAuthorizedEmployees As Collection

25

This function returns a collection of employee Ids from the employees supervised by the current user.

- IsSuperOf(sUserId) As Boolean

30

This API returns true if the logged in user is a super of the passed in user Id. It looks up the sUserId value inside the dictProxyList attribute.

- **IsRelativeOf(sUserId) As Boolean**

This API returns true if the passed in user Id corresponds to either the logged in user or someone from the dictProxyList.

- **IsInternal As Boolean**

This API is used to grant or restrict the user to information based on whether the data is private to the organization whether the user is internal or external.

- **IsInRole(sRole) As Boolean**

This API looks up the appropriate sRole value contained within the dictClientRoles attribute to determine whether the current user is authorized to perform that role.

The following accessors are used to get data from the Client Profile's object:

- **UserId:** returns sTSId
- **EmployeeId:** return sEmployeeId
- **EmployeeName:** returns sEmployeeName
- **EmployeeFirstName:** returns sEmployeeFirst
- **EmployeeLastName:** returns sEmployeeLast
- **EmployeeMiddleInitial:** returns sEmployeeMI
- **ExpandTree:** returns boolExpandTreePreference
- **TemplatePathPreference:** returns sTemplatePathPreference

Security Object

Public Methods

The following API is exposed by the Security Object and is used by the application for security checking:

5

- IsOperAuthorized(vMsg As Variant, nOperations As cmOperations, vContext As Variant) as Boolean

10

This API will return true or false depending on what is returned from the business rule functions to determine user access levels. This API is called on two situations:

15

1. When setting the initial state before loading the form. If a security requirement exists, IsOperAuthorized is called for the appropriate operation.
2. After any relevant change on the UI state. For example, when a sensitive claim is highlighted on the Task Assistant window. A relevant change is one which brings the need for a security check.

20

The valid values for the enumeration and the correspondent context data are:

25

- cmMaintainFormsCorr (none)
- cmRunEventProcessor (none)
- cmWorkOnSensitiveClaim (a Claim object)
- cmMaintainPersonalProfile (none)
- cmMaintainWorkplan (none)
- cmDeleteFileNote (a File Note object)
- cmMaintainTaskLibrary (none)
- cmMaintainOrg (none)

Server Security APIs

- 5 • *IsSVCOperAuthorized(vMsg As Variant, sOperations As String , vContext As Variant) as Boolean* —

This API is called by every method on the server that persists data or can potentially access sensitive data (reactive approach).

10

- *IsOperAuthorized(vMsg As Variant, nOperations As cmOperations, vContext As Variant) as Boolean*

This API is available for those cases where a proactive security check is needed on the server.

15

Implementation Examples

20

The following examples show some ways to implement the options described above:

Client

25

- Business Logic

IsOperAuthorized

30

Let's consider the case of the Task Assistant window, where the user should not be allowed to view any information on a sensitive claim if he/she is not

the claim performer or the performer's supervisor. The following code would be at the Controller:

```

5      Private Sub TaskTree_NodeChanged(...)
        myController.SetCurrentTask
        myController.SetState
      End Sub

10     Private Sub SetState()
        Dim objSecurity as Object
        Dim vContext(1) as Object

        Set objSecurity = taaApp.taoArch.objSecurity

15         vContext(0) = CurrentClaim
        vContext(1) = CurrentTask

        tlbEditIcon.Enabled =
20         objSecurity.IsOperAuthorized(vMsg, cmWorkOnSensitiveClaim,
        vContext)

        End Sub

```

Let's consider the case of the Maintain Correspondence Search window where only a user who is a Forms and Correspondence Librarian should be allowed to delete a template. The following code would be at the Controller:

```

30     Private Sub SetWindowMode()
        Dim objSecurity as Object
        Set objSecurity = taaApp.taoArch.objSecurity

        . . .

35         tlbEditIcon.Enabled = objSecurity.IsOperAuthorized(vMsg,
        cmMaintainFormsCorr)

        End Sub

```

40 *Server*

- SQL Filtering:

Let's consider the example of the Draft File Note window, where a user can only look at the draft file notes on which he/she is the author. At the controller, one would have:

```

5      Public Sub GetDraftFNotes()
        Dim objCP as Object
        Set objCP = taoArch.objClientProfile

        Dim fntCCA as Object
10     Set fntCCA = taaApp.taoArch.GetCCA(cmCCAFileNote)

        Call fntCCA.GetADraftFNote(vMsg, objCP.sOrgUserId, colFNotes)
        End Sub

```

15 And at the Component, the SQL statement would be:

```

        Select nFNoteId,
              sFNoteAuthor,
              dFNoteFinal,
20         :
        :
        From File Note
        Where sFileNoteSts = 'D'
        And sFNoteAuthor = sAuthor
25

```

Task Engine Application

This application runs on the server as a background process or service with no direct interaction with Client applications, so it doesn't need any GUI related security. Basically, its main actions are limited to the generation of new tasks in response to externally generated events or, more specifically, it:

- Reads static information from the Task Template tables;
- Reads events from the Event tables;
- Inserts tasks on the Task table.

In this sense, its security is totally dependent on external entities as described below:

- The Task Library application is the entrance point for any changes on the Task Template database tables. It will make use of the options described above in order to fulfill its security requirements.
- Events are generated from legacy applications, so the Task Engine relies completely on the security implemented for these applications in order to control the generation of events.
- Another level of security for event generation relies on the Database authorization and authentication functions. Only authorized components have access to the database tables (this is valid for all the other applications as well).

CLAIM FOLDER

Definition

The Claim Folder manages claim information from first notice through closing and archiving. It does this by providing a structured and easy to use interface that supports multiple business processes for handling claims. The information that it captures is fed to many other components that allow claims professionals to make use of enabling applications that reduce their workload. Because physical claim files are still required, the claim folder provides capabilities that support physical file tracking. It works with the LEGACY system to support all the capabilities that exist within the current system.

The primary processes supported by the Claim Folder are:

- First Notice of Loss
The Claim Folder is the primary entry point for new loss information. Claim files exist in the Claim Folder before they are “pushed” to the LEGACY system to perform financial processing.
- Claim Inquiry

Claim Folder supports internal and external inquires for claim information. The folder design allows quick access to various levels of information within the claim for many different reasons.

- Initiation of Claim Handling

5 The Claim Folder provides initial loss information to the claim professional so they may begin the process of making first contacts with appropriate participants in the claim. It allows them to view and enter data received through their initial contacts and investigation.

- Investigation and Evaluation

10 The Claim Folder provides access to detailed information needed for the investigation and evaluation process. It allows the claim handler to navigate between all the applications and information they need to support these processes.

- Identifying Claim Events

15 The Claim Folder identifies critical events that occur in the life of a claim, such as a change of status, which can trigger responses in other components to perform automated functions, like triggering tasks in the Task Assistant.

- Managing the Physical File

20 The Claim Folder supports better tracking capabilities for the physical files that go along with the electronic record of a claim.

Value

25 By capturing detailed information on claims, the Claim Folder tries to improve the efficiency of claim professionals in many ways. First, because the information is organized in a logical, easy to use format, there is less digging required to find basic information to support any number of inquiries. Second, the Claim Folder uses its information to support other applications like Forms
30 and Correspondence, so that claim information does not have to be reentered

every time it is needed. Third, it provides better ways to find physical files to reduce the time required finding and working with them. Beyond this, there are many other potential uses of claim folder information.

- 5 The Claim Folder also tries to overcome some of the current processing requirements that the LEGACY system imposes such as recording losses without claims, requiring policy numbers for claim set-up, requiring reserves for lines, and other restrictions. This will reduce some of the low-value added work required to feed the LEGACY system.

10

Finally, the Claim Folder organizes and coordinates information on participants and performers so that all people involved in a claim can be identified quickly and easily.

15 ***Key Users***

Although claim professionals are the primary users of the Claim Folder, any claims professional can utilize the Claim Folder to learn about a claim or answer an inquiry about a claim.

20 ***Component Functionality***

- Because the Claim Folder is the primary entry point for new claims, it needs to capture information necessary to set-up new claims and be able to pass the information to the LEGACY system. Once the information is passed, the LEGACY system owns all information contained in both systems, and it is
25 uneditable in the Claim Folder. However, the Claim Folder has more information than what is contained in the LEGACY system, and therefore allows certain information to be entered and modified once the claim is pushed to the LEGACY system.

The Claim Folder decomposes a claim into different levels that reflect the policy, the insured, the claim, the claimants, and the claimant's lines. Each level has a structured set of information that applies to it. For example, the claim level of the claim has information on the claim status, line of business, and performers. An individual line has information which includes the line type, jurisdiction, and property or vehicle damages. The claimant level contains contact information as well as injury descriptions.

The information at each level is grouped into sections for organization purposes.

Each level has a details section that includes the basic information about the level.

The key levels on the Claim Folder and their information sections are:

- The Policy Level: Details and Covered Auto for auto claims, Covered Property for property claims and Covered Yacht for marine claims.
- The Claim Level: Details, Facts of Loss, Events, Liability. Liability is considered part of the Negotiation component and described there.
- The Participant Level: Details and Contact Information. For claimants, additional sections are shown to display, Events, Injury and Disability Management. The participant level is discussed in the Participant Component.
- The Line Level: Details, Damaged Vehicle for vehicle lines, Damaged Property for property lines, Damaged Yacht for marine lines, Events, Damages, and Negotiation. Damages and Negotiation are considered part of the Negotiation component and described there.

Events are triggered in the Claim Folder by performing certain actions like changing a jurisdiction, identifying an injury, or closing a line. Other general events are triggered in the Event Section on most levels by clicking the one that has occurred. These events are processed by the Event Processor and could

generate any number of responses. In one embodiment of the present invention, the primary response is to trigger new tasks in the Task Assistant for a claim.

User Interfaces

5

- Claim Folder UI
- Policy Level – Policy Details Tab
- Policy Level – Covered Vehicle Tab
- Policy Level – Covered Property Tab

10

- Policy Level – Covered Yacht Tab
- Claim level – Claim Details Tab
- Claim level – Facts of Loss Tab
- Claim level – Events Tab
- Claim level – Liability Tab

15

- Line level – Line Details Tab
- Line level – Damaged Property Tab
- Line level – Damaged Auto Tab
- Line level – Damaged Yacht Tab
- Line level – Events Tab

20

- Line level – Damages Tab
- Line level – Negotiation Tab
- Task Assistant
- File Notes
- Claim History

25

- Search Task Template
- Search for Correspondence
- Find Claims
- Version 7
- View File Folder

30

- Print Label

CLAIM FOLDER TREE AND MENU DESIGN

5

Claim Tree

The claim tree in the Claim Folder window decomposes the claim into policy, insured, claim, claimant, and line levels depending on the specific composition of the claim.

10

The policy level is always the first node in the claim tree and is identified by the policy number. Before the policy number is entered, the field is listed as “Unknown”. If a claim is uncoded, the field is listed as “Uncoded”. Selecting the policy level brings up the policy level tabs in the body of the Claim Folder.

15

The insured level is always the second node in the claim tree and is identified by the insured’s name. Before the insured is identified, the field is listed as “Unknown”. Selecting the insured level brings up the insured participant tabs in the body of the claim folder. Only one insured is listed at this level as identified in the policy level tabs, however, multiple insureds can still be added. Additional insureds are shown in the participant list below the claim tree.

20

The claim level is always the third node in the claim tree and is identified by the claim number. When the claim level is selected, the claim level tabs appears in the body of the Claim Folder.

25

After the claim level, all claimants are listed with their associated lines in a hierarchy format. When a claimant is added, a node is added to the tree, and the field identifying the claimant is listed as “Unknown”. Once a participant has been identified, partial or client, the name of the claimant is listed on the level.

30

When the level is selected, the participant level tabs for the claimant is shown in the body of the claim folder.

Line levels are identified by their line type. Before a line type is selected, the line level is listed as “Unknown”. When a line level is selected, the line level tabs for the specific line are shown in the body of the claim folder.

There are several things that can alter the claim tree once it has been set up. First, if a claimant or line is deleted, it is removed from the claim tree. A claim that is marked in error does not change the appearance of the levels. Second, the claim, claimant, and line levels are identified by different icons depending on whether they are pushed to V7 or not. Third, when a line or claimant is offset, it is identified as such.

Participant List

The participant list box contains all the non-claimant and non-insured participants on the claim. (Claimants and insureds are shown in the claim tree and not repeated here.) Participants are shown with their name and role. When a participant is selected, the participant level tabs are displayed in the claim folder.

Claim Folder Menu Items

The claim folder menus contain the actions that a user would need to perform within the claim folder. They can all be accessed through keyboard selection. The menu options become enabled or disabled based on the state of the Claim Folder. The Claim Folder can be in view mode or edit mode for a specific level in the Claim Tree. When the Claim Folder is in edit mode, most options are disabled until the user saves their changes and is returned to view mode. The enabling/disabling of menu options is also dependent on whether the claim or portions of the claim have been pushed to V7.

Claim Folder Tool Bar

The tool bar represents common action that a user performs that can be easily accessed by clicking the appropriate icon. There are five groups of button on the Claim Folder tool bar that represent, in order, common activities, adding new items to a claim, launching utilities, performing V7 activities, and accessing help functions. The enabling/disabling of tool bar buttons follows the same logic as for menu items.

Window Description

10

| Control Name | Type | Description | Default Value/State |
|----------------------------------|----------------|--|--|
| Claim Tree | Tree View | The Claim Tree lists the policy, insured, all of the claimants and their related lines in a claim tree format. | The current claim tree structure for the selected claim. The claim level is selected and the claim level tabs are displayed. |
| Participant List | List View | A list of all non-insured and non-claimant participants associated with a claim. | All participants who are not claimants or insureds for the claim and their roles |
| Edit Tool Bar Button | Command Button | Changes the tabs for the level selected in the claim tree or participant list view to edit mode. | Enabled when claim is in view mode. |
| Refresh Tool Bar Button | Command Button | Refreshes the current claim, including all Participant and Line information. | Enabled when claim is in view mode. |
| Find Tool Bar Button | Command Button | Opens the Claim Search window to allow the user to search for another claim | Enabled |
| Claim Allocation Tool Bar Button | Command Button | Opens the Claim Allocation window. | Enabled when claim is in view mode. |

| Control Name | Type | Description | Default Value/State |
|--------------------------------------|----------------|--|---|
| Manage Physical File Tool Bar Button | Command Button | Opens the Manage Physical File window. | Enabled when claim is in view mode. |
| Declare Event Tool Bar Button | Command Button | Opens the Declare Events window. | Enabled when claim is in view mode. |
| Claimant Tool Bar Button | Command Button | Adds claimant and opens Participant tabs in edit mode for entry of a new claimant level node | Enabled when claim is in view mode. V7 limit for claimants is 999, we will not edit this here. |
| Participant Tool Bar Button | Command Button | Adds a new participant and opens Participant tabs in edit mode. | Enabled when claim is in view mode. |
| Line Tool Bar Button | Command Button | Adds line and opens Line tabs in edit mode for entry of a new line level node. | Enabled when claim is in view mode and claimant context selected in claim tree. V7 limit for lines is 15 per claimant, this button will be disabled after 15 added. |
| Assign Performer Tool Bar Button | Command Button | Opens Assign Performer window | Enabled when claim is in view mode. |
| Print Screen Tool Bar Button | Command Button | Prints the current claim folder window. | Enabled |
| Task Assistant Tool Bar Button | Command Button | Launches Task Assistant for the current claim | Enabled when claim in view mode. |
| File Notes Tool Bar Button | Command Button | Launch File Notes for the current claim | Enabled when claim in view mode. |
| Claim History Tool Bar Button | Command Button | Launch Claim History for the current claim | Enabled when claim in view mode. |
| Correspondence Tool Bar Button | Command Button | Opens Forms and Correspondence window | Enabled when claim in view mode. |
| Push to V7 Tool Bar | Command Button | Open the terminal | Enabled when |

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 508. 509. 510. 511. 512. 513. 514. 515. 516. 517. 518. 519. 520. 521. 522. 523. 524. 525. 526. 527. 528. 529. 530. 531. 532. 533. 534. 535. 536. 537. 538. 539. 540. 541. 542. 543. 544. 545. 546. 547. 548. 549. 550. 551. 552. 553. 554. 555. 556. 557. 558. 559. 560. 561. 562. 563. 564. 565. 566. 567. 568. 569. 570. 571. 572. 573. 574. 575. 576. 577. 578. 579. 580. 581. 582. 583. 584. 585. 586. 587. 588. 589. 590. 591. 592. 593. 594. 595. 596. 597. 598. 599. 600. 601. 602. 603. 604. 605. 606. 607. 608. 609. 610. 611. 612. 613. 614. 615. 616. 617. 618. 619. 620. 621. 622. 623. 624. 625. 626. 627. 628. 629. 630. 631. 632. 633. 634. 635. 636. 637. 638. 639. 640. 641. 642. 643. 644. 645. 646. 647. 648. 649. 650. 651. 652. 653. 654. 655. 656. 657. 658. 659. 660. 661. 662. 663. 664. 665. 666. 667. 668. 669. 670. 671. 672. 673. 674. 675. 676. 677. 678. 679. 680. 681. 682. 683. 684. 685. 686. 687. 688. 689. 690. 691. 692. 693. 694. 695. 696. 697. 698. 699. 700. 701. 702. 703. 704. 705. 706. 707. 708. 709. 710. 711. 712. 713. 714. 715. 716. 717. 718. 719. 720. 721. 722. 723. 724. 725. 726. 727. 728. 729. 730. 731. 732. 733. 734. 735. 736. 737. 738. 739. 740. 741. 742. 743. 744. 745. 746. 747. 748. 749. 750. 751. 752. 753. 754. 755. 756. 757. 758. 759. 760. 761. 762. 763. 764. 765. 766. 767. 768. 769. 770. 771. 772. 773. 774. 775. 776. 777. 778. 779. 780. 781. 782. 783. 784. 785. 786. 787. 788. 789. 790. 791. 792. 793. 794. 795. 796. 797. 798. 799. 800. 801. 802. 803. 804. 805. 806. 807. 808. 809. 810. 811. 812. 813. 814. 815. 816. 817. 818. 819. 820. 821. 822. 823. 824. 825. 826. 827. 828. 829. 830. 831. 832. 833. 834. 835. 836. 837. 838. 839. 840. 841. 842. 843. 844. 845. 846. 847. 848. 849. 850. 851. 852. 853. 854. 855. 856. 857. 858. 859. 860. 861. 862. 863. 864. 865. 866. 867. 868. 869. 870. 871. 872. 873. 874. 875. 876. 877. 878. 879. 880. 881. 882. 883. 884. 885. 886. 887. 888. 889. 890. 891. 892. 893. 894. 895. 896. 897. 898. 899. 900. 901. 902. 903. 904. 905. 906. 907. 908. 909. 910. 911. 912. 913. 914. 915. 916. 917. 918. 919. 920. 921. 922. 923. 924. 925. 926. 927. 928. 929. 930. 931. 932. 933. 934. 935. 936. 937. 938. 939. 940. 941. 942. 943. 944. 945. 946. 947. 948. 949. 950. 951. 952. 953. 954. 955. 956. 957. 958. 959. 960. 961. 962. 963. 964. 965. 966. 967. 968. 969. 970. 971. 972. 973. 974. 975. 976. 977. 978. 979. 980. 981. 982. 983. 984. 985. 986. 987. 988. 989. 990. 991. 992. 993. 994. 995. 996. 997. 998. 999. 1000.

| Control Name | Type | Description | Default Value/State |
|--|----------------|---|--|
| Button | | emulator window at the first V7 setup screen. | claim is in view mode and claim status is pre-push or open and there are new claimants or lines to push. |
| Make Payment Tool Bar Button | Command Button | Open the V7 PUEM screen in the terminal emulator window if a claimant or participant tied to one claimant is selected. Otherwise, display window that requires user to select a claimant. | Enabled when claim had been pushed to V7 and a participant is selected. |
| Help Tool Bar Button | Command Button | Opens Help | Enabled |
| Claim Edit | Menu Option | Changes Claim tabs into Edit mode so that the user can make changes | Enabled when claim is in view mode. |
| Claim Refresh | Menu Option | Refreshes the current claim, including all Participant and Line information. | Enabled when claim is in view mode. |
| Claim Find | Menu Option | Opens the Claim Search window | Enabled |
| Claim Save | Menu Option | Save the claim level when it is in edit mode. | Enabled when the claim level is in edit mode. |
| Claim Claim Status First Report Complete | Menu Option | Changes the status of the claim to "Unassigned" and creates First Report Complete Event. | Enabled when claim is in view mode and claim status is "New". |
| Claim Claim Status Assignment Complete | Menu Option | Changes the status of the claim to "Open" and creates Assignment Complete Event. | Enabled when claim is in view mode and claim status is "Unassigned". |
| Claim Claim Status Close | Menu Option | Initiates the close claim process | Enabled when claim is in view mode, V7 claim status is closed, and Millennium Claim Status is |

| Control Name | Type | Description | Default Value/State |
|--------------------------------------|-------------|---|--|
| Claim Claim Status Reopen | Menu Option | Changes the status of the claim to “Open”. | not “Closed” or “Archived” Enabled when claim is in view mode and “Closed” or “Archived”. |
| Claim Claim Status Mark In Error | Menu Option | Marks the current claim and all of its lines in error. Expires all participants. | Enabled when claim is in view mode, and not pushed to V7. |
| Claim Allocate | Menu Option | Opens the Claim Allocation window. | Enabled when claim is in view mode. |
| Claim Manage Physical File | Menu Option | Opens Physical File window | Enabled when claim is in view mode. |
| Claim Declare Event | Menu Option | Opens Declare Event window | Enabled when claim is in view mode. |
| Claim Close Claim Folder | Menu Option | Closes current claim folder window | Enabled |
| Edit Cut | Menu Option | Move selected text to the clipboard | Disabled |
| Edit Copy | Menu Option | Copy selected text to the clipboard | Disabled |
| Edit Paste | Menu Option | Paste text from the clipboard | Disabled |
| View Collapse All | Menu Option | Collapses the claim tree | Enabled |
| View Expand All | Menu Option | Expand the claim tree | Enabled |
| Policy Edit | Menu Option | Opens policy tabs in edit mode. | Enabled when claim is in view mode. |
| Policy Save | Menu Option | Save current policy tab information. | Enabled when policy level is in edit mode. |
| Participant New Claimant | Menu Option | Opens Participant tabs in edit mode for entry of a new claimant level node in the claim tree. | Enabled when claim in view mode. |
| Participant New Insured | Menu Option | Opens Participant tabs in edit mode for entry of a new insured level node in the claim tree. | Enabled when claim in view mode. |

| Control Name | Type | Description | Default Value/State |
|-------------------------------|-------------|---|---|
| Participant New Other | Menu Option | Opens Participant tabs in edit mode for entry of a new entry in the Participant list. | Enabled when claim in view mode. |
| Participant Edit | Menu Option | Puts currently selected participant tabs into edit mode. | Enabled when claim is in view mode and participant selected in tree or list box. |
| Participant Save | Menu Option | Saves information changed on participant tabs and returns claim to view mode. | Enabled only when a participant level is in edit mode. |
| Participant Delete | Menu Option | Deletes selected participant | Enabled only when claim is in view mode and participant is selected. |
| Line New | Menu Option | Adds new line to claim tree and opens line tabs in edit mode. | Enabled when claim is in view mode, claimant has been selected, and limit of 15 lines per claimant has not been exceeded. |
| Line Edit | Menu Option | Puts Line tabs into edit mode so that the user can change line details | Enabled when claim is in view mode and line is selected. |
| Line Save | Menu Option | Save information entered on line tabs and returns claim to view mode. | Enabled when a line is in edit mode. |
| Line Change Status Close | Menu Option | Changes status of a line in the claim folder to "Closed" | Enabled when claim is in view mode, a line is selected, the line is not closed, and its V7 status is closed. |
| Line Change Status Reopen | Menu Option | Changes the status of the line selected to | Enabled when claim is in view |

| Control Name | Type | Description | Default Value/State |
|--------------------------------------|-------------|---|--|
| | | "Open". | mode, a line is selected, and line is "Closed". |
| Line Change Status Mark in Error | Menu Option | Marks selected line in error. | Enabled when claim is in view mode, a line is selected, and line has not been pushed. |
| Line Allocate | Menu Option | Opens the Claim Allocation window. | Enabled |
| Performers Assign | Menu Option | Opens the Assign Performers window | Enabled when claim is in view mode. |
| Performers View All | Menu Option | Displays all claim performers assigned to the claim in View Performer UI. | Enabled when claim is in view mode. |
| Utilities Print Screen | Menu Option | Prints current screen. | Enabled |
| Utilities View Task Assistant | Menu Option | Opens Task Assistant window for current claim. | Enabled when claim is in view mode. |
| Utilities Create New File Note | Menu Option | Opens File Notes window for current claim. | Enabled when claim is in view mode. |
| Utilities View Claim History | Menu Option | Opens Claim History window for current claim. | Enabled when claim is in view mode. |
| Utilities Create Correspondence | Menu Option | Opens Forms and Correspondence window. | Enabled when claim is in view mode. |
| Version 7 Push Claim | Menu Option | Launches V7 to start the push process. | Enabled when claim is in view mode and in "Pre-Push" status or open when there are unpushed claimants and lines. |
| Version 7 Undo Push | Menu Option | Reverts claim to pre-push status. | Enabled when claim is in view mode and status is "Push-Pending". |

| Control Name | Type | Description | Default Value/State |
|---------------------------|-------------|---|---|
| Version 7 Make Payment | Menu Option | Open the V7 PUEM screen in the terminal emulator window if a claimant or participant tied to one claimant is selected. Otherwise, display window that requires user to select a claimant. | Enabled when claim had been pushed to V7 and a participant is selected. |
| Help Contents | Menu Option | Opens help file to content menu. | Enabled |
| Help Search For Help On | Menu Option | Open help file to search window. | Enabled |
| Help About | Menu Option | Opens window displaying information about the application. | Enabled |

Window Details

| Control Name | Initial Focus | Default Button | Tab Order |
|------------------|---------------|----------------|-----------|
| Claim Tree | Yes | | 1 |
| Participant List | | | 2 |
| Claim Menu | | | 3 |
| Edit Menu | | | 4 |
| View Menu | | | 5 |
| Policy Menu | | | 6 |
| Participant Menu | | | 7 |
| Line Menu | | | 8 |
| Performer Menu | | | 9 |
| Utilities Menu | | | 10 |
| Version 7 Menu | | | 11 |
| Help Menu | | | 12 |

5 CAR Diagram

| Control Name | Action | Response | Short Cut Key | Mnemonic Key |
|--------------|--------|---|---------------|--------------|
| Claim Tree | Click | <ul style="list-style-type: none"> Highlights Node in Tree Disable participant in list view if one selected previously Shows related tabs in | | |

| Control Name | Action | Response | Short Cut Key | Mnemonic Key |
|--------------------------------------|--------------|---|---------------|--------------|
| All Text Fields Participant List | | view mode. | | |
| | Double Click | <ul style="list-style-type: none"> • Enable appropriate menu items and tool bar buttons. • Level selected in tree enters Edit mode. | | |
| | Highlight | <ul style="list-style-type: none"> • Enable Cut and Copy. | | |
| | Click | <ul style="list-style-type: none"> • Highlights participant in list box • Deselects level in claim tree if one selected previously • Shows related tabs in view mode. • Enable appropriate menu items and tool bar buttons. | | |
| | Double Click | <ul style="list-style-type: none"> • Participant selected in list view enters Edit mode. | | |
| Edit Tool Bar Button | Click | <ul style="list-style-type: none"> • Changes the tabs for the level selected in the claim tree or participant list view to edit mode. | | |
| Refresh Tool Bar Button | Click | <ul style="list-style-type: none"> • Refreshes the current claim, including all Participant and Line information. | | |
| Find Tool Bar Button | Click | <ul style="list-style-type: none"> • Opens the Claim Search window to allow the user to search for another claim | | |
| Claim Allocation Tool Bar Button | Click | <ul style="list-style-type: none"> • Opens the Claim Allocation window. | | |
| Manage Physical File Tool Bar Button | Click | <ul style="list-style-type: none"> • Opens the Manage Physical File window. | | |
| Declare Event Tool Bar Button | Click | <ul style="list-style-type: none"> • Opens the Declare Events window. | | |
| Claimant Tool Bar Button | Click | <ul style="list-style-type: none"> • Adds claimant and opens Participant tabs in edit mode for entry of a new claimant level | | |

| Control Name | Action | Response | Short Cut Key | Mnemonic Key |
|----------------------------------|--------|---|---------------------|-----------------|
| Participant Tool Bar Button | Click | <ul style="list-style-type: none"> node Adds new participant and opens Participant tabs in edit mode. | | |
| Line Tool Bar Button | Click | <ul style="list-style-type: none"> Adds line and opens Line tabs in edit mode for entry of a new line level node. | | |
| Assign Performer Tool Bar Button | Click | <ul style="list-style-type: none"> Opens Assign Performer window | | |
| Print Screen Tool Bar Button | Click | <ul style="list-style-type: none"> Prints the current claim folder window. | | |
| Task Assistant Tool Bar Button | Click | <ul style="list-style-type: none"> Launches Task Assistant for the current claim | | |
| File Notes Tool Bar Button | Click | <ul style="list-style-type: none"> Launch File Notes for the current claim | | |
| Claim History Tool Bar Button | Click | <ul style="list-style-type: none"> Launch Claim History for the current claim | | |
| Correspondence Tool Bar Button | Click | <ul style="list-style-type: none"> Opens Forms and Correspondence window | | |
| Push to V7 Tool Bar Button | Click | <ul style="list-style-type: none"> Open the terminal emulator window at the first V7 setup screen. | | |
| Make Payment Tool Bar Button | Click | <ul style="list-style-type: none"> Open the V7 PUEM screen in the terminal emulator window if a claimant or participant tied to one claimant is selected. Otherwise, display window that requires user to select a claimant. | | |
| Help Tool Bar Button | Click | <ul style="list-style-type: none"> Opens Help | | |
| Claim Edit | Click | <ul style="list-style-type: none"> Changes Claim tabs into Edit mode so that the user can make changes | | |
| Claim Refresh | Click | <ul style="list-style-type: none"> Refreshes the current claim, including all Participant and Line | | Ctrl+R |

| Control Name | Action | Response | Short Cut Key | Mnemonic Key |
|--|--------|--|---------------|--------------|
| Claim Find | Click | <ul style="list-style-type: none"> information. Opens the Claim Search window | | Ctrl+F |
| Claim Save | Click | <ul style="list-style-type: none"> Save the claim level when it is in edit mode. | | |
| Claim Claim Status First Report Complete | Click | <ul style="list-style-type: none"> Changes the status of the claim to "Unassigned" and creates First Report Complete Event. | | |
| Claim Claim Status Assignment Complete | Click | <ul style="list-style-type: none"> Changes the status of the claim to "Open" and creates Assignment Complete Event. | | |
| Claim Claim Status Close | Click | <ul style="list-style-type: none"> Initiates the close claim process | | |
| Claim Claim Status Reopen | Click | <ul style="list-style-type: none"> Changes the status of the claim to "Open". | | |
| Claim Claim Status Mark In Error | Click | <ul style="list-style-type: none"> Marks the current claim and all of its lines in error. Expires all participants. | | |
| Claim Allocate | Click | <ul style="list-style-type: none"> Opens the Claim Allocation window. | | |
| Claim Manage Physical File | Click | <ul style="list-style-type: none"> Opens Physical File window | | |
| Claim Declare Event | Click | <ul style="list-style-type: none"> Opens Declare Event window | | |
| Claim Close Claim Folder | Click | <ul style="list-style-type: none"> Closes current claim folder window | | |
| Edit Cut | Click | <ul style="list-style-type: none"> Move selected text to the clipboard | | Ctrl + X |
| Edit Copy | Click | <ul style="list-style-type: none"> Copy selected text to the clipboard | | Ctrl + C |
| Edit Paste | Click | <ul style="list-style-type: none"> Paste text from the clipboard | | Ctrl + V |
| View Collapse All | Click | <ul style="list-style-type: none"> Collapses the claim tree | | |
| View Expand All | Click | <ul style="list-style-type: none"> Expand the claim tree | | |
| Policy Edit | Click | <ul style="list-style-type: none"> Opens Policy tabs in edit mode | | |
| Policy Save | Click | <ul style="list-style-type: none"> Save policy information and returns | | |

| Control Name | Action | Response | Short Cut Key | Mnemonic Key |
|--------------------------------------|--------|---|---------------------|-----------------|
| Participant New Claimant | Click | <ul style="list-style-type: none"> • tabs to view mode. • Opens Participant tabs in edit mode for entry of a new claimant level node in the claim tree. | | |
| Participant New Insured | Click | <ul style="list-style-type: none"> • Opens Participant tabs in edit mode for entry of a new insured level node in the claim tree. | | |
| Participant New Other | Click | <ul style="list-style-type: none"> • Opens Participant tabs in edit mode for entry of a new entry in the Participant list. | | |
| Participant Edit | Click | <ul style="list-style-type: none"> • Puts currently selected participant tabs into edit mode. | | |
| Participant Save | Click | <ul style="list-style-type: none"> • Saves information changed on participant tabs and returns claim to view mode. | | |
| Participant Delete | Click | <ul style="list-style-type: none"> • Deletes selected participant | | |
| Line New | Click | <ul style="list-style-type: none"> • Adds new line to claim tree and opens line tabs in edit mode. | | |
| Line Edit | Click | <ul style="list-style-type: none"> • Puts Line tabs into edit mode so that the user can change line details | | |
| Line Save | Click | <ul style="list-style-type: none"> • Save information entered on line tabs and returns claim to view mode. | | |
| Line Change Status Close | Click | <ul style="list-style-type: none"> • Changes status of a line in the claim folder to "Closed" | | |
| Line Change Status Reopen | Click | <ul style="list-style-type: none"> • Changes the status of the line selected to "Open". | | |
| Line Change Status Mark in Error | Click | <ul style="list-style-type: none"> • Marks selected line in error. | | |
| Line Allocate | Click | <ul style="list-style-type: none"> • Opens the Claim Allocation window. | | |

| Control Name | Action | Response | Short Cut Key | Mnemonic Key |
|-----------------------------------|--------|---|---------------|--------------|
| Performers Assign | Click | <ul style="list-style-type: none"> Opens the Assign Performers window | | |
| Performers View All | Click | <ul style="list-style-type: none"> Displays all claim performers assigned to the claim in View Performer UI. | | |
| Utilities Print Screen | Click | <ul style="list-style-type: none"> Prints current screen. | | Ctrl+P |
| Utilities View Task Assistant | Click | <ul style="list-style-type: none"> Opens Task Assistant window for current claim. | | |
| Utilities Create New File Note | Click | <ul style="list-style-type: none"> Opens File Notes window for current claim. | | |
| Utilities View Claim History | Click | <ul style="list-style-type: none"> Opens Claim History window for current claim. | | |
| Utilities Create Correspondence | Click | <ul style="list-style-type: none"> Opens Forms and Correspondence window. | | |
| Version 7 Push Claim | Click | <ul style="list-style-type: none"> Launches V7 to start the push process. | | |
| Version 7 Undo Push | Click | <ul style="list-style-type: none"> Reverts claim to pre-push status. | | |
| Version 7 Make Payment | Click | <ul style="list-style-type: none"> Open the V7 PUEM screen in the terminal emulator window if a claimant or participant tied to one claimant is selected. Otherwise, display window that requires user to select a claimant. | | |
| Help Contents | Click | <ul style="list-style-type: none"> Opens help file to content menu. | | |
| Help Search For Help On | Click | <ul style="list-style-type: none"> Open help file to search window. | | |
| Help About | Click | <ul style="list-style-type: none"> Opens window displaying information about the application. | | |

Data Elements

| Literal | Length | Control Type | Data Entity Tie | Edit Rules* | Error Handling |
|------------------|--------|--------------|-----------------|-------------|----------------|
| Claim Tree | | Tree | | | |
| - Policy | | View | | | |
| | | Tree | Policy | | |
| | | View | Number | | |
| | | Node | (Policy) | | |
| - Insured | | Tree | Participant | | |
| | | View | Preferred | | |
| | | Node | Name | | |
| | | | (Insurance | | |
| | | | Involvement | | |
| | | |) | | |
| - Claim | | Tree | Claim | | |
| | | View | Number | | |
| | | Node | (Claim) | | |
| - Claimant | | Tree | Particiapant | | |
| | | View | Preferred | | |
| | | Node | Name | | |
| | | | (Insurance | | |
| | | | Involvement | | |
| | | |) | | |
| - Line | | Tree | Line Type | | |
| | | View | (Line) | | |
| Participant List | | List | Participant | | |
| Box | | View | Preferred | | |
| | | | Name and | | |
| | | | Role | | |
| | | | (Insurance | | |
| | | | Involvement | | |
| | | | & | | |
| | | | Involvement | | |
| | | | Role) | | |

5

Commit Points

- | | | |
|----|-------------|---|
| 10 | Claim | Save Menu Option – Saves all claim level data |
| | Policy | Save Menu Option – Saves all policy level data |
| | Participant | Save Menu Option – Saves all participant level data |
| | Line | Save Menu Option – Saves all line level data |
| | Claim | Close Claim Folder Menu Option – Prompts user to save changes |

if in edit mode.

CLAIM HISTORY

5 Definition

Claim history shows information in one user interface that is intended to include all the constituent elements of a claim file. The four types of history included in the component are searchable by common indexing criteria like participant, performer, and claim phase. A caption report can be produced which shows the
10 history selected in a document format.

Value

Claim history provides the users with one common interface through which to view a large variety of information about the claim. It includes all history available on a claim, and is expanded as claim capabilities are built, like
15 incoming mail capture. Users develop customized views of history based on any criteria the history can be indexed by, and these reports are saved as customizable Word documents. The way the history information is indexed provides quick access to pertinent data needed to respond to a variety of requests.

Key Users

20 All members of the claims organization can use claim history as a way to quickly see all activity performed on a claim. This utility increases the ability to locate key information regarding any claim.

Component Functionality

Claim history is a component that contains a simple process to retrieve history
25 from the other components in the system. It contains no native data itself. Even viewing a history element is done in the component window where the item was first captured.

The second key process of claim history is to produce a caption report of all history elements according to the items the user wants to include.

There are two user interfaces needed for this component that correspond to the two key functions above:

- Claim History Search: This window utilizes the claim phase, participant, performer and history type fields on each history record to help the user narrow the search for specific history.
- Caption Report: This report uses the functionality of Word to produce a report of each history item the user wants to see and its associated detail. Since the report is produced in Word, it can be fully customized according to many different needs.

User Interfaces

- Claim History Search
- Caption Report (Word document, not UI design)

FORMS AND CORRESPONDENCE

Definition

The Forms & Correspondence component supports internal and external Claim communication and documentation across all parts of the claims handling process.

The Forms and Correspondence - Create Correspondence function provides the ability to search for a template using various search criteria, select a template for use and then leverage claim data into the selected template.

The Forms and Correspondence - Template Maintenance function is a tool for the librarian to create, delete, and update Correspondence templates and their associated criteria.

5 Some specific processes supported by Forms & Correspondence are:

- Reporting of claims
 - to state/federal agencies, etc. at First Notice of Loss
 - internal requests for information

10 • Advising Participants

• Contacting Participants

• Performing Calculations

• Creating correspondence for claims or non-claims

Value

15 The Forms and Correspondence component supports user in creating documentation.

Leveraging information from the claim directly into correspondence reduces the amount of typing and dictating done to create forms and letters. The typical data available to the templates should include: author, addressee, claim number, date of loss, insured name, policy number, etc. A librarian adds and maintains standardized forms and letters in logical groupings made available for the entire company.

25

Key Users

Claim employees are the primary users of the Forms and Correspondence component, but it can be used by anyone who has access to the system to create documents using existing templates.

30

Forms and Correspondence librarians use the system to create, update or remove templates.

Component Functionality

Forms and Correspondence - Create Correspondence

- 5 1. Search for a template based on search criteria.
2. Create a correspondence from a template using claim data.
3. Create a correspondence from a template without using claim data.
4. View the criteria for a selected template.
5. View the Microsoft Word template before leveraging any data.

10

Forms and Correspondence - Template Maintenance

1. Search for a template based on search criteria.
2. Create, duplicate, edit, and delete Correspondence templates and their criteria.
3. Internally test and approve newly created/edited templates.
- 15 4. Properly copy Word templates for NAN distribution.

User Interfaces

- Search for Correspondence
- Correspondence Details
- 20 • Associate Fields
- Maintain Correspondence Search
- Correspondence Template Information – Details tab
- Correspondence Template Information – Criteria tab
- Microsoft Word

25

FILE NOTES

Definition

File notes captures the textual information that cannot be gathered in discrete data elements as part of claim data capture. They are primarily a documentation tool, but also are used for internal communication between claim professionals. Users can sort the notes by participant or claim phase (medical, investigation, coverage, etc.) in order to permit rapid retrieval and organization of this textual information.

Value

File notes speeds the retrieval and reporting of claim information. A file notes search utility with multiple indexing criteria provides claim professionals and supervisors with the ability to quickly find a file note written about a particular person or topic. The file notes tool utilizes modern word processing capabilities which speed entry, reduce error, and allow for important information to be highlighted. Furthermore, the categorization and key field search eases the process of finding and grouping file notes. Finally, file notes improves communication as they can be sent back and forth between those involved in managing the claim.

Key Users

All members of the claims organization can utilize file notes. External parties via RMS can view file notes marked General. This utility increases the ability to locate key information regarding a claim. Anyone who wants to learn more about a claim or wants to record information about a claim utilizes the file notes tool.

Component Functionality

File Notes searching is included as part of the claim history component which allows the user to search the historical elements of a claim file including tasks, letters, and significant claim change events.

The user interfaces that are needed for this component are:

- 5 • The File Notes Search (part of Claims History component): This window utilizes the claim phase fields on the file notes record to help the user narrow the search for specific file notes. Also, it allows users to view all file notes that meet specified criteria in a report style format.
- 10 • File Notes Entry: The window used to record the file note. It embeds a word processing system and provides the ability to categorize, indicate a note as company (private) vs. general (public), save the note as a draft or a final copy, and send the note to another person.

User Interfaces

- 15 • File Notes
- Draft File Note Review
- Participant Search
- Performer Search

20

ADDRESS BOOK

Definition

Address Book is the interface between the claims system and the Client database. The Client application is a new component designed to keep track of people or organizations that interact with RELIANCE for any reason, but claims are most
25 likely the first application to use Client. The Address Book is accessed directly from the Desktop and from the Claim Folder.

The Address Book meets several needs within the claim organization. Although, its primary function is to support the adding of participants to a claim, it acts as a

pathway to the Client database for searching out existing participants, and adding new people or organizations to the corporate database.

- 5 The Client database maintains information on names, addresses, phone numbers, and other information that always applies to a person or organization no matter what role they play on a claim.

Value

- 10 Address Book provides a common definition of people or organizations that interact with RELIANCE, and therefore provides a much more efficient means of capturing this information. Each Client database entry provides the ability to link a person or organization to all the different roles that they play across the organization, and therefore makes retrieving information on a client by client basis quick and easy.

- 15 There are many benefits to RELIANCE by having a common address book. Information on people and organizations is leveraged into other activities like enabled tasks that lookup a client's phone numbers when a call needs to be made. Information that has been redundantly stored in the past can be entered once and
20 reused. Once all areas of RELIANCE use the Client application, different areas of the company can share definitions of individuals and organizations.

Component Functionality

- Address Book allows users to add, edit and delete records from the Client
25 database. It also provides a robust search facility, including phonetic name searches to find people contained in the Client database.

There are two primary user interfaces for the Address Book:

- Find Address Book Entry – This is a search window that allows a user to find records in the Client database using names, addresses, phone numbers, and other identifiers. From this window, specific records can be selected and attached as participants on claims.
 - 5 • Maintain Address Book Entry – This window allows users to add or edit information about a client by specifying their names, addresses, phone numbers, email information, and identification numbers like a SSN or TIN.
- 10 The Address Book is created concurrently with the Client application to make sure that a consistent design approach is followed.

Key Users

- All members of the claim organization use the Address Book to look up
- 15 information on people and organizations in the client database. Those who set up and handle claims use the Address Book to identify participants.

User Interfaces

- Find Client
- 20 • Maintain Client

INDEX

Definition

- 25 The Index, or Claim Search, component provides the ability to locate claims within the system using various search criteria. The criteria cover a wider variety of search capabilities than exist today including, but not limited to, claim performers, participants, phonetic name searches, addresses, roles, offices, and

lines of business. The search results display selected claim, participant, and performer data to help identify each claim.

The Index component also allows easy navigation to various claim components like the Claim Folder, once a claim has been identified. It can be accessed from the Desktop and from any open Claim Folder.

The Index component is designed to support several business processes within the claim organization. Its functions are critical to improving claim staff productivity and customer service in the following areas:

- Matching Mail

The capabilities of the Index search make it easier to identify the claim a piece of mail belongs to based on criteria used to identify claims in forms, correspondence, and bills. The performers for a claim can also be identified for mail routing purposes.

- Phone Inquiries

This window is the primary point to handle incoming phone inquiries for any claim. Users can find claims quickly without having to burden the caller with requests for additional information.

- Duplicate Claims

Prior to setting up new claims, checks can be done to ensure that the claim has not already been entered into the system. The additional search capabilities provide a greater assurance that duplicate claims will not be entered. This reduces the need to delete or merge claim records.

- Fraud Identification

Because claims can be searched easily by participant and other criteria, fraud questions can be easily researched. This is not the primary purpose of this component, however.

Value

Index reduces the time required to find existing claims, and also reduces potential rework from not finding claims when they are needed for matching mail or duplicate checks.

Key Users

Claim employees are the primary users of the Index window, but it can be used by anyone who has access to the system to access claims without having to memorize tracking numbers.

Component Functionality

Index is primarily a robust search engine that quickly and efficiently searches for claims. It is not a component that stores its own data, as it is primarily focused on pointing users more quickly and directly to claim data.

Index is composed of one search window that follows the format of all other search windows in the system.

User Interfaces

- Find Claims

25

INJURY

Definition

The Injury component captures versions of a claimant's injuries as they progress. This window captures injury information in the form of discrete data fields, reducing the need for free form text file notes. Capturing data, instead of text,

allows the injury to be closely tracked and quickly reported. The data can also serve as feedback statistics, i.e. for building best claims practices and in risk selection. The preferred method of identifying and documenting injuries is the ICD-9 code. The user can enter or search for the ICD-9 code using descriptors or numbers.

Value

Data on every injury is captured and summarized in a consistent, accessible format, making recording and reviewing the case considerably less time consuming and more organized, allowing the adjuster to focus on desired outcomes. This “snapshot” of the current status and history of an injury greatly facilitates handing off or file transfers between claim professionals. Additionally, the discrete data field capture enables the use of events to identify action points in the lifecycle of a claim that has injuries.

Key Users

All members of the claims organization can utilize the Injury component. This component increases the ability to locate and summarize key information regarding an injury.

Component Functionality

Injury is an aspect of participant information, which is related to the claimant participants on the claim. The participant component relates clients to all other claim-related entities. Information on injuries will be related to participant records and displayed at the participant level information in the Claim Folder. New entities are needed to implement injury data capture: injury and ICD-9 search. The Injury component interacts with five other components: Claim Folder-which contains Disability Management data about a claimant; Participant-

which lists the individuals associated with the claim; as well as File Notes, Task Assistant and the Event Processor. The injury component also uses Microsoft WORD to create a formatted, historical injury report for a particular individual.

5 The user interfaces that are needed for this component are:

- 10 • Injury: This is the primary injury window which captures basic injury report data, including: the source of the injury report, the date of the injury report, a Prior Medical History indicator, and then a detailed list of the injuries associated with that report. The detailed list includes discrete fields for the following data: ICD-9 code, body part, type, kind, severity, treatment, diagnostic, a free form text description field, and a causal relation indicator.
- 15 • ICD-9: This is the search window for locating ICD-9 codes and associated descriptions.
- Disability Management: This window contains a subset of participant data fields that enables more effective injury management.

User Interfaces

20

- Claim Folder – Participant Level - Injury Tab
- ICD-9 Search Window
- Claim Folder – Participant Level - Disability Management Tab

25

NEGOTIATION

Definition

30 Figure 10 is an illustration of the Negotiation component of one embodiment of the present invention. Negotiation provides a single, structured template that is

supplemented by supporting views, to capture events regarding a negotiation. The negotiation interface **1000** captures key elements of a negotiation, such as a settlement target range, current demands and offers, and Supporting Strengths and Opposing Assertions of the claim. Negotiation information is gathered in discrete data elements **1002**, enabling the capability to generate events **1006** based on key attributes or changes in a negotiation. These events **1006** are then sent to a common event queue **1008**. The negotiation component **1000** interfaces with the File Notes **1004** component to provide additional documentation capability, in a non-structured format. The negotiation template is supported by all other data contained in the Claim Folder.

Value

Data on every case is summarized in a consistent, accessible format, making recording and reviewing the case considerably less time consuming and more organized, allowing the adjuster to focus on negotiation strategy and desired outcomes. This “snapshot” of the current status greatly facilitates handing off or file transfers between claim professionals. Additionally, the discrete data field capture enables the use of events to identify action points in a negotiation.

Key Users

All members of the claims organization can utilize Negotiation. This component increases the ability to locate and summarize key information regarding a negotiation.

Component Functionality

Negotiation is a type of resolution activity, which is part of the claim component of the claims entity model. The claim component is the central focus of the

claims entity model, because it contains the essential information about a claim. The claim component supports the core claim data capture functionality, first notice processes, and resolution activity for claims. The main types/classes of data within the claim component are: Claim, Claimant, Line, Claim History, Resolution Activity, Reserve Item, and Reserve Item Change. Three entities are needed to implement negotiation: resolution activity, claim and claim history. There is also interaction between the Negotiation component and the Task Assistant, File Notes and Event Processor components.

10 The user interfaces needed for negotiation are:

- Negotiation: This window captures demand and offer data, including: amount, date, type and mode of communication. The target settlement range, lowest and highest, is captured, along with strengths and weaknesses of the case.

Supporting user interfaces, which are also part of the Claim Folder, include:

- Liability (claim level tab): This window is used to document liability factors in evaluating and pricing a claim. The liability factors include percent of liability for all involved parties; form of negligence that prevails for that jurisdiction; theories of liability that the claim handler believes to be applicable to the claim. Used prior to developing negotiation strategy.
- Damages (line level tab): This window provides the capability for pricing and evaluating a claim based on incurred and expected damages. Used prior to developing negotiation strategy.

User Interfaces

- Claim Folder – Line Level - Negotiation Tab
- Claim Folder – Claim Level - Liability Tab
- Claim Folder – Line Level - Damages Tab

5

ORGANIZATION

Definition

Figure 11 is a flow diagram of the operations utilized by the Organization component in accordance with one embodiment of the present invention. The Organization component **1100** allows common information for the people who perform work on claims to be stored, searched, and reused across all the claims they work.

In one embodiment of the organization component **1100**, all employee records are kept in a common database **1102** so that they can be attached to the specific claims they work, located in a claim database **1104**. The common information that is kept on the employee record includes name, location, phone, and some minimal organizational context information like office or division. This is the minimum required to support the tracking of performers on claims. The employee information **1102** is then linked **1106** to the claim information **1104** and the databases are updated **1108**. Having linked the employees **1102** with the claims **1104** they are working on, the database can be searched by employee or claim **1110**.

However, this version of the organization can be expanded to include organization relationships (specifically tracking where an employee falls in the organization structure), groups of individuals as performers for claim assignment, and claim allocation within the organization structure. These capabilities are to support any notion of caseload analysis, management reporting, or automated assignment that would need to be included.

30

Value

By tracking common definitions of employees across claims, indexing capabilities are improved and performers on claims are accurately tracked.

5 ***Key Users***

The primary users of the organization capabilities are the administrative personnel who set up performers, as well as the technicians who track who is working a claim.

10 ***Component Functionality***

The design of the minimum scope of the organization component includes a search window to find employees in the organization and a detail window to see specific information on each employee.

User Interfaces

15

- Organization Entity Search
- Add/Edit Organization Entity

20

Participant

Definition

Figure 12 is an illustration of the Participant component in accordance with one embodiment of the present invention. Participant 1200 provides the link between claims and individuals and organizations stored in the Client database and accessed through the Address Book 1202. Participant links clients to claims 1204 by defining the roles that they play, e.g. claimant, driver, or doctor. It reuses the

information contained in the Address Book **1202** so that it does not have to be reentered for each participant.

The participant component also allows linkages **1206** to be made between participant and to various items on claims. A doctor can be linked to the claimant they treat and a driver can be linked to the damaged vehicle they were driving.

Once a participant has been added to a claim, additional information **1208** that is specific to that claim can be attached. This information includes injury, employment, and many other types of information that are specific to the role that a person or organization plays in a claim.

The business processes primarily supported by Participant **1200** are:

- Recording Involvement in a Claim

There is a basic data capture requirement to keep track of individuals and organizations involved in a claim, and this is done most efficiently using the participant approach.

- Recording Role Specific Information

Address Book **1202** stores information that can be reused across claims, but the Participant component **1200** needs to maintain the information that is specific to an individual or organization's involvement in a specific claim.

- Making Contact with Clients

Because participant ties back to the common Address Book **1202**, any contact information contained there can be quickly and easily obtained.

- Forms and Correspondence **1210**

Leveraging address information into letters provides an efficiency enablement to all users who don't need to look up name and address information.

- Categorizing History Information

Participants are used to categorize history items like tasks and file notes so that information relating to a single participant on a claim can be easily retrieved.

- 5
- Claim Indexing

Attaching participants to a claim allows the Index component to be more effective in the processing of claim inquiries.

Key Users

- 10 The primary users of the Participant components **1200** are those who work directly on processing claims. They are the ones who maintain the participant relationships.

- Claims professionals who deal with injuries use the Participant tabs in the claim
- 15 folder to track injuries and manage disabilities for a better result on the claim.

Value

- Because the Participant component **1200** only seeks to define the roles that individuals and organization play across all claims, there is no redundant entry of
- 20 name, address, and phone information. This is all stored in the Address Book **1202**.

- The number of potential participant roles that can be defined is virtually limitless, and therefore expandable, as the involvement of additional people and
- 25 organizations needs to be captured.

Component Functionality

Most participant functionality is executed within the context of the Claim Folder. The Claim Folder contains participants levels in two ways. First, claimants are shown in the claim tree on the left-hand side of the window. Below this, other participants are shown in a list. Selecting any participant displays a set of

5 participant information tabs that displays the following information:

- Participant Details – Basic information about the role that a participant plays in a claim and all the other participants that are associated to it.
- 10 • Contact Information – Information from the Address Book on names, addresses, and phone numbers.
- Injury – Specific information on the nature of injuries suffered by injured claimants.
- Disability Management – Information on injured claimants with disabilities.
- 15

Only the first two tabs will be consistently displayed for all participants. Other tabs can appear based on the role and characteristics of a participant's involvement in a claim.

20

Adding or editing participant role information is actually done through the Address Book **1202** search window. The process is as simple as finding the Address Book **1202** record for the intended participant and specifying the role the participant plays in the claim. Once this is done, the participant will be shown in

25 the Claim Folder, and additional information can be added.

The notion of a participant is a generic concept that is not specific to claims alone. It is a based on design pattern that can be expanded as additional claims capabilities are built. Any involvement of an individual or an organization can be

30 modeled this way.

User Interfaces

- Participant Level – Participant Details Tab
- Participant Level – Contact Information Tab
- 5 • Participant Level – Events Tab
- Participant Level – Injury Tab (Injury Component)
- Participant Level – Disability Management Tab (Injury Component)
- View Participant List

10

PERFORMER

Definition

15 The Performer component allows organizational entities (individuals, groups, offices, etc.) to be assigned to various roles in handling the claim from report to resolution. The Performer component is utilized on a claim-by-claim basis.

A performer is defined as any individual or group that can be assigned to fulfill a role on a claim.

20

The Performer component supports the assignment processes within the claim handling process. This goes beyond the assignment of claim at FNOL. This component allows the assignment of work (tasks) as well.

25 Some specific processes supported by Performer are:

- Assign claims
 - identification of different roles on the claims in order to assign the claim (Initiate Claim - DC Process work)

• Keeps roles and relationships of performers within claims

30 • Assigning tasks

- Reassignments
 - Supports Initiate claim process - assignment
 - Search mechanism for employees, offices
 - All performers should be in the Organization component
- 5 • Provides history of assignments

Value

The Performer component allows the assignment of roles or tasks to individuals or groups. The data about performers resides in a common repository: the Organization component.

10

The Performer component reduces the time required to find employees, teams or any potential performer, and ensures consistency of data.

Key Users

- 15 The primary users of the Performer component are those who work directly on processing claims. They are the ones who maintain the assignment of roles or tasks related to a claim.

Component Functionality

20 The Performer component supports an informational function and an assignment function.

1. View details for performers (employee, office, unit, etc.). These details may suggest organizational entity relationships but in no way define or maintain them.
2. View all performers assigned to a claim, currently and historically (includes individuals, groups, offices, etc.)
- 25 3. Assign performers to a claim - at the claim level, claimant, and supplement levels (including individuals, office, groups, etc.)

User Interfaces

- Assign Performer
- Performer Roles
- View Performer List

5

TASK ASSISTANT

Definition

The Task Assistant is the cornerstone of a claim professional's working environment. It provides diary functions at a work step level that allow the management of complex claim events. It enables the consistent execution of claim best practices by assembling and re-assembling all of the tasks that need to be performed for a claim based on detailed claim characteristics. These characteristics come from regulatory compliance requirements, account servicing commitments, and best practices for handling all types of claims. The Task Assistant also provides mechanisms that automate a portion of or all of the work in performing a task to assist the claim professional in completing his or her work. Once a task is completed, the Task Assistant generates a historical record to document the claim handler's actions.

20 The Task Assistant is...

- A method for ensuring consistent execution of regulatory requirements, account servicing commitments and claim handling best practices
- A source of automated assistance for claim professionals
- An organization-wide communication tool within the context of a claim (it does not replace Lotus Notes).
- A mechanism for making claims strategy common practice and sharing corporate experience
- A diary application to keep track of claims
- A historical tracking tool

- A way to get a claim professional's or a team leader's attention
- A mechanism for making process changes in the organization quickly

Within the Task Assistant, claim professionals have the ultimate control to
5 determine if and when tasks need to be completed. They also have the ability to
add tasks to the list to represent work they do that is not reflected in standard
definitions of tasks in the system. This supports a vision of the claim
professional as a knowledgeable worker who spends most of his or her time
focused on a successful result through investigation, evaluation, and negotiation
10 of the best possible outcome.

Value

The Task Assistant reduces the time required to handle a claim by providing the
claim professional with the automatic scheduling of claim activity. It helps the
15 claim professional remember, perform and record tasks completed for every
claim. Completed tasks are self-documenting and remain part of the claim
history.

The Task Assistant also ensures the consistent handling of claims throughout the
20 organization, and by doing so can significantly impact expenses and loss costs.
Furthermore, it helps ensure regulatory compliance and the fulfillment of account
promises. It supports the teamwork required in handling difficult claims as a
structure communication mechanism.

25 The automated enablements for tasks reduce the amount of time claim
professionals have to spend on low value-added activities such as writing
correspondence. They can therefore spend a larger amount of time investigating,
evaluating, and negotiating each claim.

Key Users

While claim professionals are the primary users of the Task Assistant, others use the application as well. The entire claims department utilizes the Task Assistant to structure work and communicate with one another. Team leaders use the Task Assistant to conduct file review and to guide the work of the claim professional. Administrative staff use the Task Assistant as a means to receive work and to communicate the completion of that work. Claim professionals use the Task Assistant to complete work and to request assistance from team leaders and specialty claim professionals.

The Task Assistant requires a new type of user to set-up and maintain the variety of tasks that are created. A task librarian maintains the task library, which contains the list of all the standardized tasks across the organization. The librarian defines rules which cause tasks to be placed on task lists based on claim characteristics, dates which define when tasks are due, and task enablement through other applications.

Component Functionality

Figure 13 is a flow diagram of the operations utilized by the Task Assistant component of the present invention. The processing of tasks through the Task Assistant comprises the lifecycle of the task from its creation to its completion or deletion. In first operation 1300, the Task engine provides tasks to the Task Assistant. In the second operation 1302, the Task Assistant then displays the list of tasks provided by the Task Engine. In the third operation 1304, the user is allowed to add tasks and edit tasks provided by the Task Engine. The fourth operation 1306 occurs as the claim is processed. As the claim is processed, the user and the Task Engine determine when the various tasks are completed. When a task is completed, the fifth operation 1308 occurs. In the fifth 1308 operation, a historical record is generated for any tasks which is determined to be completed.

The key user interfaces for this component are:

- 5 • The Task Assistant: This is the utility that supports the population, execution, and historical tracking of tasks. It allows users to perform tasks, complete tasks, and remove tasks that have been automatically added.
- 10 • The Task Workplan: This user interface allows the user to strategize the plan for a specific claim. It shows tasks attached to their respective levels of the claim including lines, participants, and the claim itself.
- 15 • Task Enablement Windows: There are many windows that can be added to enable task with other applications such as telephone support, forms and correspondence, and file notes. The number of potential task enablements is virtually limitless.
- 20 • Task Entry: Allows a user to add new task that weren't automatically added to the task list to cover situations where the claim handler wants to indicate work to be done that is not reflected by the standard task definitions in the task library.

Behind the functioning of the Task Assistant, the Task Engine continually evaluates messages sent from other components and determines based on the rules established by the task librarian, which tasks should be populated on the Task Assistant. Messages are sent to the Task Assistant when something
25 significant occurs in another component. The messages contain the characteristics the Task Engine needs to evaluate in order to place the proper tasks on the task list.

User Interfaces

- 30 • Task Assistant

- Reassign Task
- Edit/Add Task
- Clear Task
- Mark Task In Error
- Build Workplan
- Participant Search
- Participant Phone Number
- Phone Task
- Personal Profile
- Account Search
- Organization Search
- Performer Search

EVENT PROCESSOR / TASK ENGINE

Definition

Figure 14 is an illustration of the Event Processor 1400 in combination with other components of the system in accordance with one embodiment of the present invention. The Event Processor 1400 works behind the scenes of all claims applications to listen for significant events that have occurred in the life of various entities in the system like claims (but potentially many more like accounts or policies in the future). It determines what the response should be to each event and passes it onto the system component that will process it. The Event Processor is completely generic to any specific entity or event in the system and therefore enables automation based on an almost limitless number of events and responses that could be defined.

Figure 15 is an illustration of the Task Engine 1404 in accordance with one embodiment of the present invention. The Task Engine 1404 processes the most common set of event responses, those that need to generate tasks 1406 based on

events **1006** that have occurred. It compares the tasks that have been defined to the system to a set of claim criteria to tell which tasks should be added and which tasks should now be marked complete.

- 5 The only interface the user sees to these components is the task library **1500**, which allows task librarians **1502** to define the tasks and the rules that create them which are used by the Task Engine **1404**. Working with these components is almost entirely a function performed by specialists who understand the complexity of the rules involved in ensuring events **1006** and tasks **1406** are
- 10 handled properly.

- The event processor **1400** also manages the communication and data synchronization between new claim components and LEGACY claim systems. This single point of contact effectively encapsulates the complex processes of
- 15 translation and notification of events between the two systems.

Value

- The automated determination of event responses provides enormous benefits to system users by reducing the maintenance they have to perform in ensuring the correct disposition of claims. Users trigger events by the data they enter and the
- 20 system activities they perform, and the system automatically responds with appropriate automated activities like generating tasks.

- The task generation rules defined in the Task Library provide an extremely flexible definition of claim handling processes limited only by the data available
- 25 in the system on which task creation rules can be based. Process changes can be implemented quickly by task librarians, and enforced through the Task Assistant.

Key Users

Although all claim personnel directly benefit from the functioning of the event processor and task assistant, only specially trained users control the processing of

these components. Task Librarians using the Task Library user interface handle the process of defining new tasks and the rules that trigger them in the Task Engine.

- 5 Operations personnel who ensure that all events are processed correctly and that the appropriate system resources are available to manage the throughput handle event processing.

Component Functionality

- As shown in Figure 14, the Event Processor 1400 utilizes a common queue 208
- 10 of events 1006 that are populated by any component 1402 of the system to identify what events have occurred. Working this queue, the Event Processor determines the appropriate response for an event and provides information to other components that need to process them. The Event Processor does not process any events itself and maintains clear encapsulation of system
 - 15 responsibilities. For example, an event that affects claim data is processed by the claim component.

- The Task Engine 1404 follows a process of evaluating events 1006, determining claim characteristics, and matching the claim's characteristics to tasks defined in
- 20 the Task Library 1500.

- The key user interface for the Task Engine 1404 is the Task Library 1500. The Task Library 1500 maintains the templates that contain the fields and values with which tasks are established. A task template might contain statements like
- 25 "When event = litigation AND line of business = commercial auto, then..."
- Templates also identify what a tasks due date should be and how the task is enabled with other applications.

User Interfaces

- Search Task Template
- Search Triggering Templates
- Task Template Details

5

While various embodiments have been described above, it should be understood that they have been presented by way of example only, and not limitation. Thus, the breadth and scope of a preferred embodiment should not be limited by any of the above described exemplary embodiments, but should be defined only in

10 accordance with the following claims and their equivalents.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
21

CLAIMS

What is claimed is:

1. A computer program embodied on a computer readable medium for developing component based software capable of handling tasks, comprising:
 - a data component that stores, retrieves and manipulates data utilizing a plurality of functions; and
 - a client component including:
 - an adapter component that transmits and receives data to/from the data component,
 - a business component that serves as a data cache and includes logic for manipulating the data, and
 - a controller component adapted to handle events generated by a user utilizing the business component to cache data and the adapter component to ultimately persist data to a data repository,
- wherein the client component is adapted for allowing a user to define tasks that achieve a goal upon completion, allowing the user to input rules which dictate which of the tasks should be selected based on predetermined events, receiving at least one event, and outputting the task which is selected based on the received event in accordance with the rules.

- 1 2. The computer program as set forth in claim 1, wherein the client component is
2 further adapted for indicating which tasks are complete.
- 1 3. The computer program as set forth in claim 1, wherein the received event is
2 provided from an event queue.
- 1 4. The computer program as set forth in claim 3, wherein the event queue is
2 populated with events from other components of a system.
- 1 5. The computer program as set forth in claim 3, wherein the event queue is
2 populated with events from other applications.
- 1 6. The computer program as set forth in claim 1, wherein the goal is insurance
2 related.
- 1 7. The computer program as set forth in claim 1, wherein the outputted tasks are
2 provided to a task assistant.
- 1 8. A computer program embodied on a computer readable medium for
2 creating a component based architecture capable of handling tasks,
3 comprising:
4
5 a user interface form code segment adapted for collecting data from a user
6 input;
7
8 a business object code segment adapted for caching data;
9
10 an adapter code segment adapted for transmitting data to a server; and
11
12 a controller component code segment adapted for handling events
13 generated by the user interacting with the user interface code segment,
14 providing validation within a logic unit of work, containing logic to
15 interact with the business component, creating one or more business
16 objects, interacting with the adapter component to add, retrieve, modify,

17 or delete business objects, and providing dirty flag processing to notify a
18 user of change processing;

19

20 wherein the computer program is adapted for allowing a user to define
21 tasks that achieve a goal upon completion, allowing the user to input rules
22 which dictate which of the tasks should be selected based on
23 predetermined events, receiving at least one event, and outputting the
24 task which is selected based on the received event in accordance with the
25 rules.

1 9. The computer program as set forth in claim 8, wherein the computer program
2 is further adapted for indicating which tasks are complete.

1 10. The computer program as set forth in claim 8, wherein the received event is
2 provided from an event queue.

1 11. The computer program as set forth in claim 10, wherein the event queue is
2 populated with events from other components of a system.

1 12. The computer program as set forth in claim 10, wherein the event queue is
2 populated with events from other applications.

1 13. The computer program as set forth in claim 8, wherein the goal is insurance
2 related.

1 14. The computer program as set forth in claim 8, wherein the outputted tasks are
2 provided to a task assistant.

1 15. A computer program embodied on a computer readable medium for
2 creating a component based architecture for allowing communication
3 between a plurality of clients and a server in order to handle tasks,
4 comprising:
5

6 one or more client components included with each client, each client
7 component of each client adapted for communicating and manipulating
8 data with a first data type, wherein the client component is adapted for
9 allowing a user to define tasks that achieve a goal upon completion,
10 allowing the user to input rules which dictate which of the tasks should be
11 selected based on predetermined events, receiving at least one event, and
12 outputting the task which is selected based on the received event in
13 accordance with the rules;

14
15 one or more server components adapted for communicating and
16 manipulating data with a second data type; and

17
18 one or more adapter components included with each client for translating
19 data from the one or more client components to the second data type when
20 communicating data from the client to the server and further translating
21 data from the one or more server components to the first data type when
22 communicating data from the server to the client.

1 16. The computer program as set forth in claim 15, wherein the client components
2 are further adapted for indicating which tasks are complete.

1 17. The computer program as set forth in claim 15, wherein the received event is
2 provided from an event queue.

1 18. The computer program as set forth in claim 17, wherein the event queue is
2 populated with events from other components of a system.

1 19. The computer program as set forth in claim 17, wherein the event queue is
2 populated with events from other applications.

1 20. The computer program as set forth in claim 15, wherein the goal is insurance
2 related.

METHOD AND ARTICLE OF MANUFACTURE FOR COMPONENT BASED TASK HANDLING DURING CLAIM PROCESSING

ABSTRACT

5

A computer program is provided for developing component based software capable of handling insurance-related tasks. The program includes a data component that stores, retrieves and manipulates data utilizing a plurality of functions. Also provided is a client component which includes an adapter component that transmits and receives data to/from the data component. The client component also includes a business component that serves as a data cache and includes logic for manipulating the data. A controller component is also included which is adapted to handle events generated by a user utilizing the business component to cache data and the adapter component to ultimately persist data to a data repository. In use, the client component allows a user to define tasks that achieve an insurance-related goal upon completion. In addition, the user is able to input rules which dictate which tasks should be selected based on a set of predetermined events. Events are then received from any source, such as a common event queue. Finally, tasks are selected and outputted based on the received events.

20

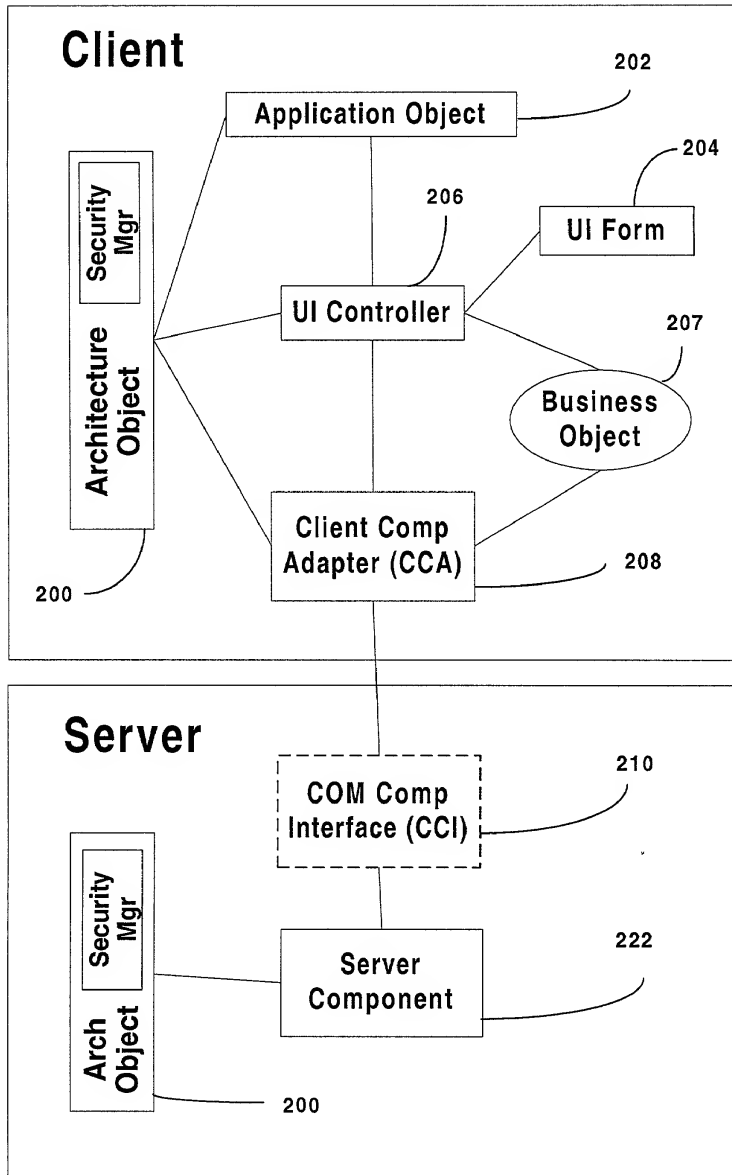


Figure 2A

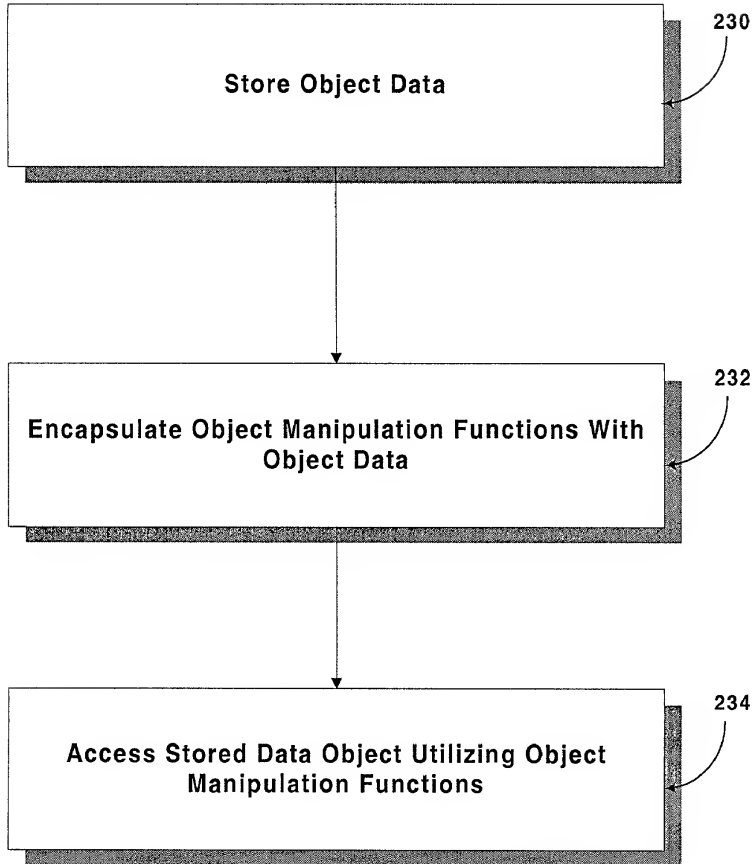


Figure 2B

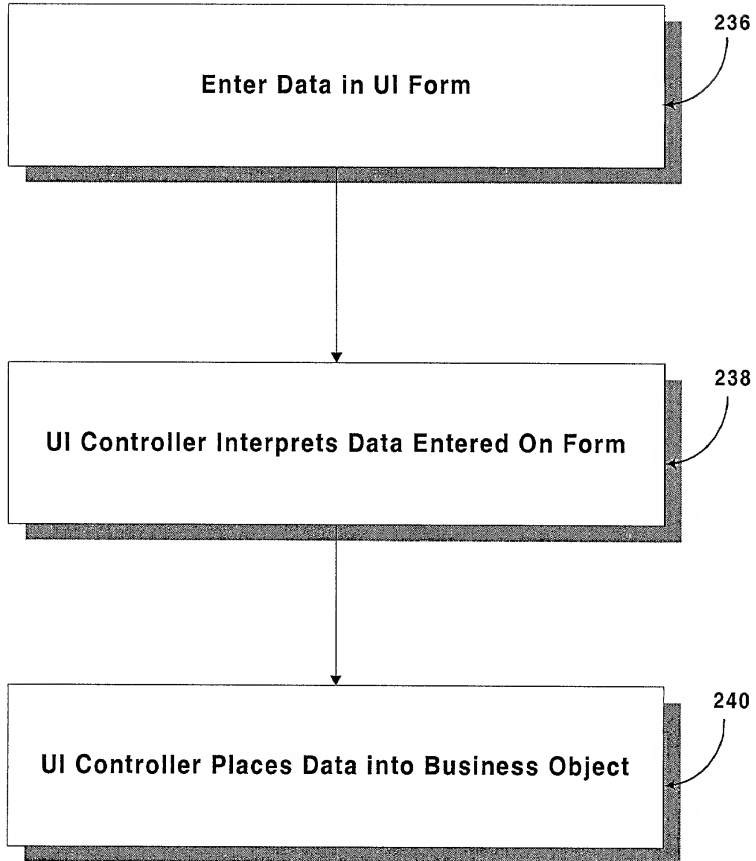


Figure 2C

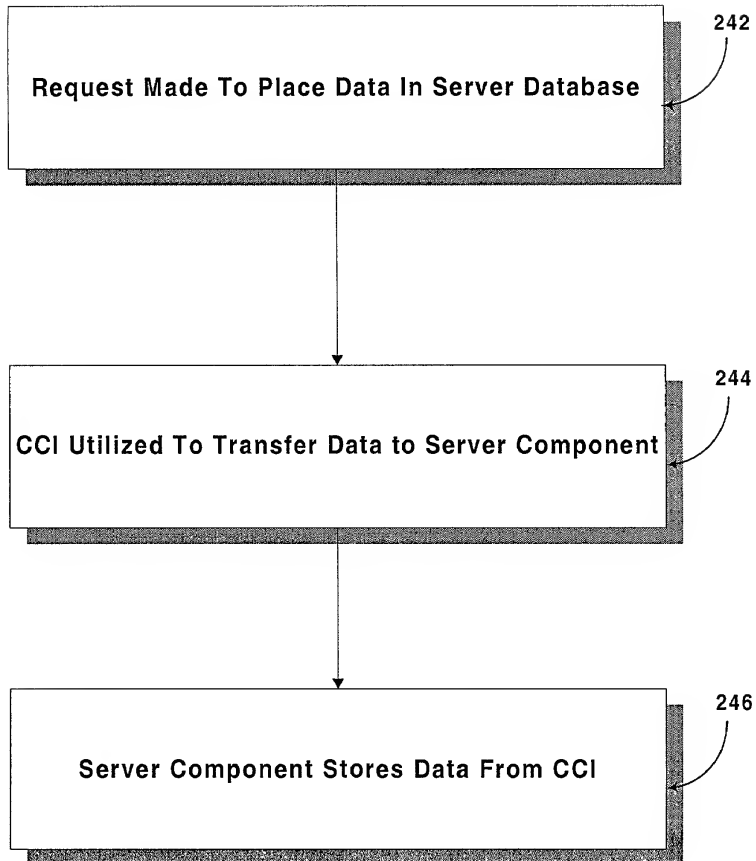


Figure 2D

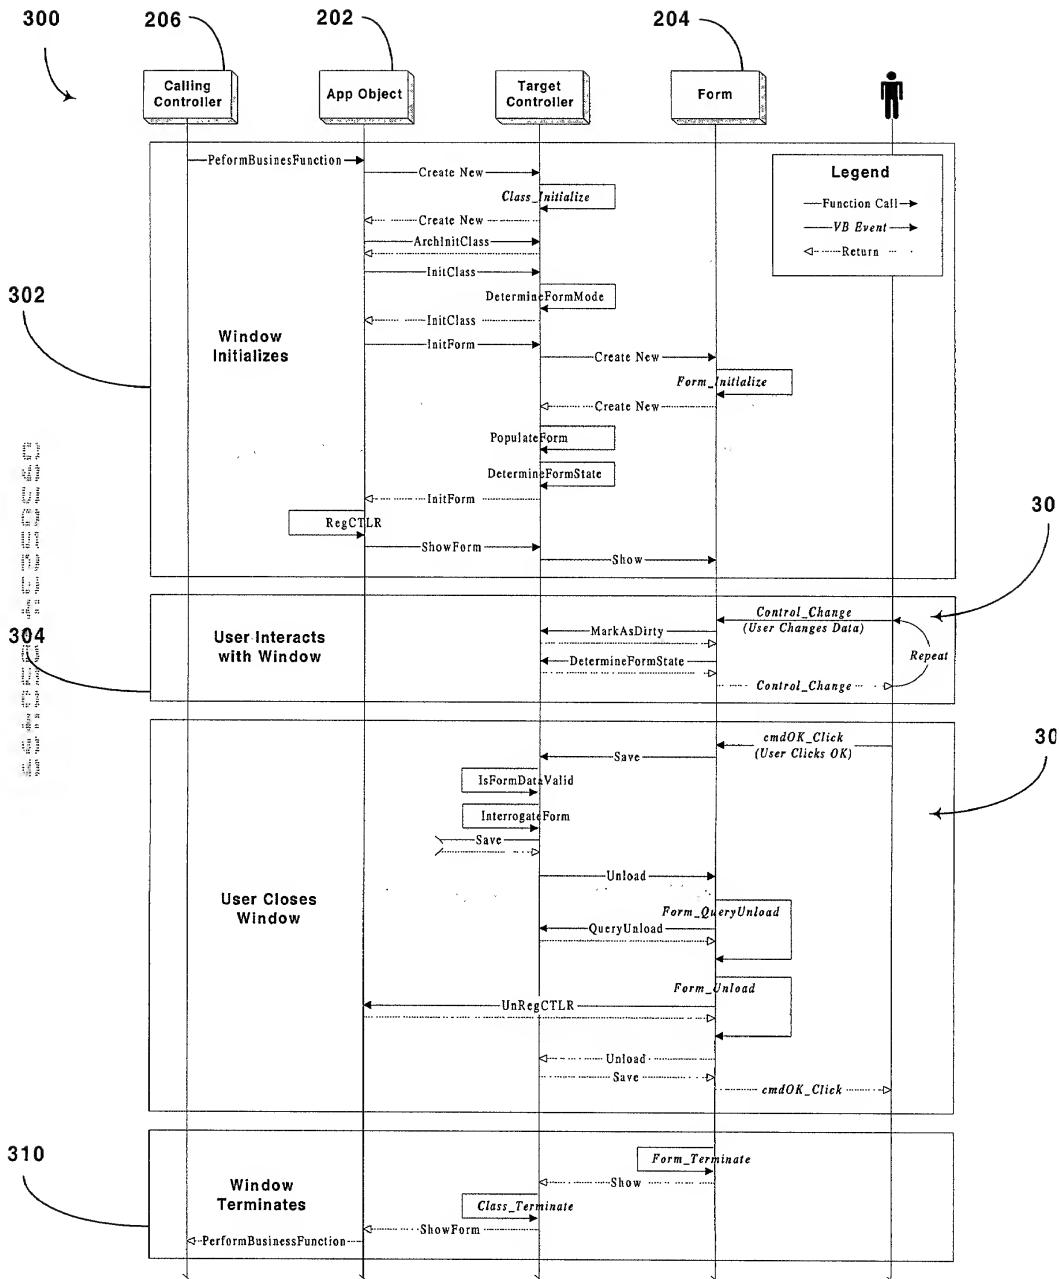


Figure 3

400

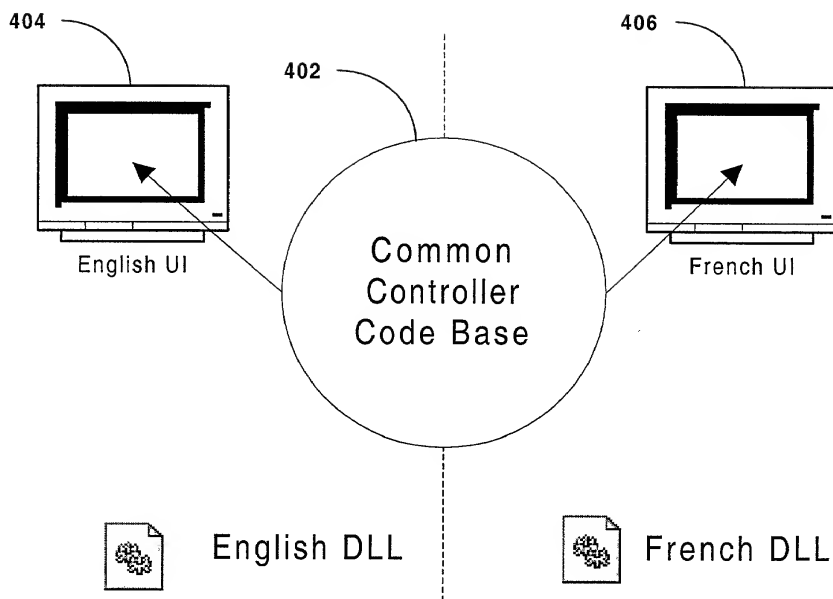


Figure 4

Figure 5

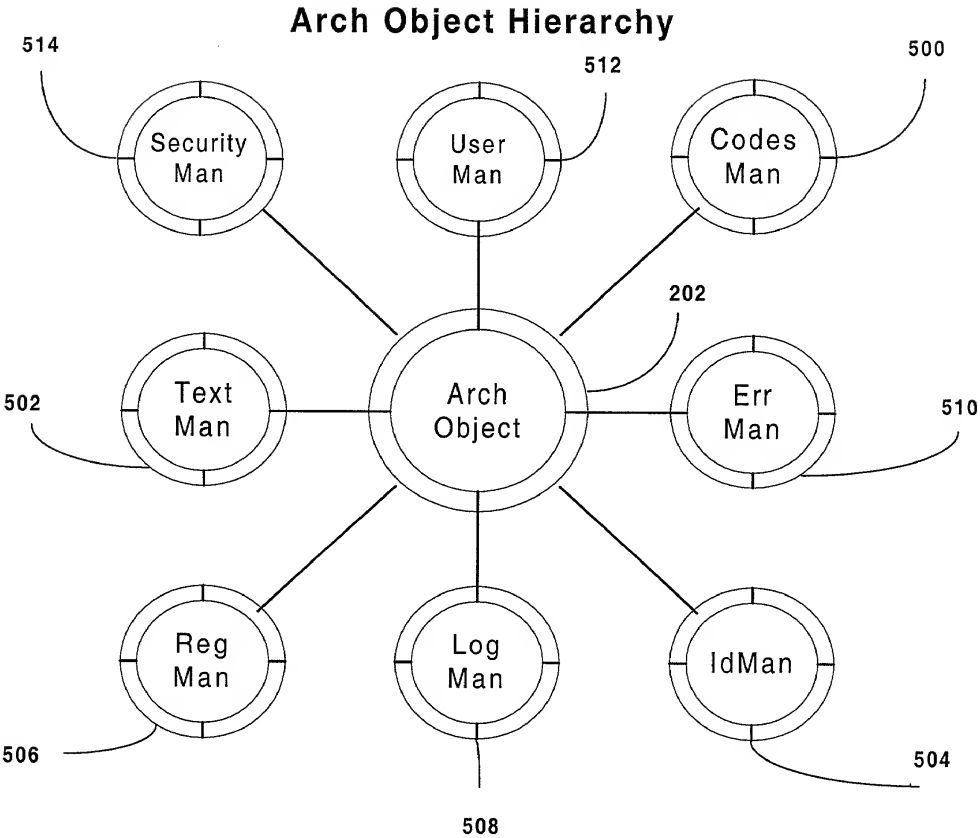


FIG. 6 is a block diagram of a database system 600. The database system 600 includes a database 602, a code table 604, a code relations table 606, and a code decode table 608. The database 602 includes a code category table 602a, a code table 602b, and a code relations table 602c. The code table 604 includes a code category table 604a, a code table 604b, and a code relations table 604c. The code relations table 606 includes a code category table 606a, a code table 606b, and a code relations table 606c. The code decode table 608 includes a code category table 608a, a code table 608b, and a code relations table 608c.

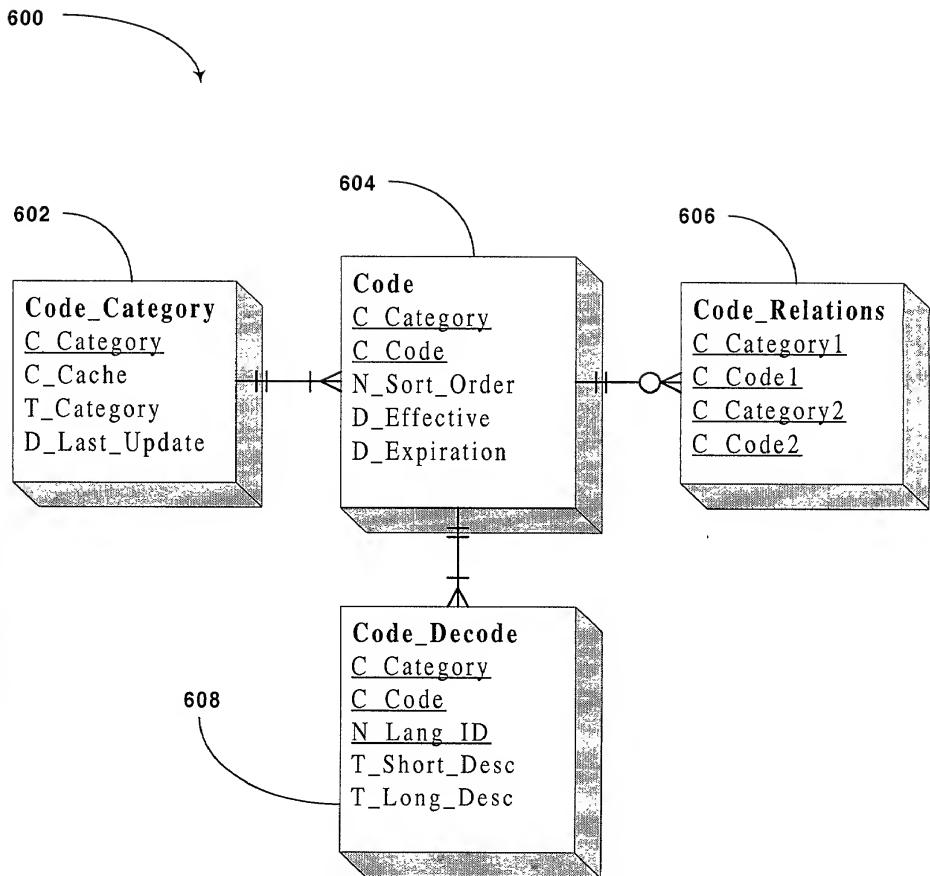


Figure 6

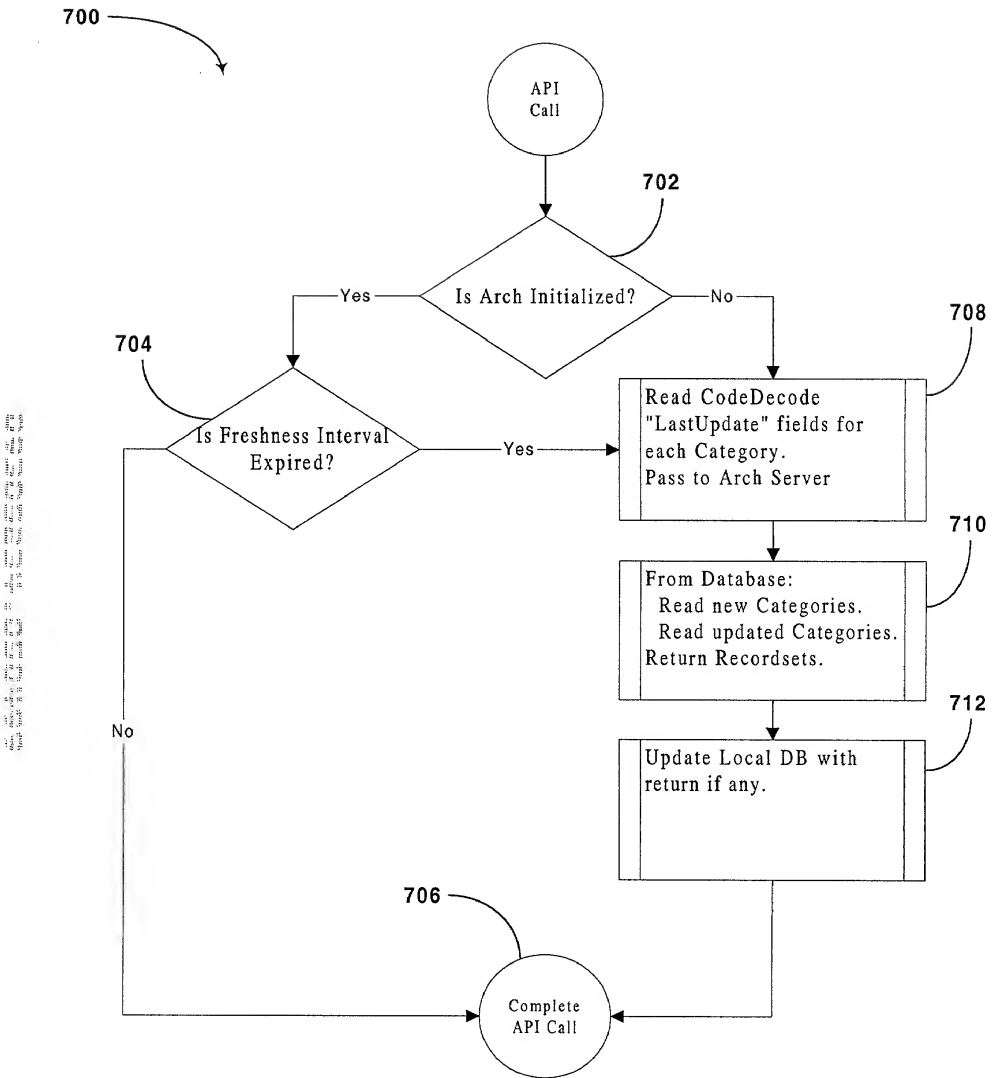


Figure 7

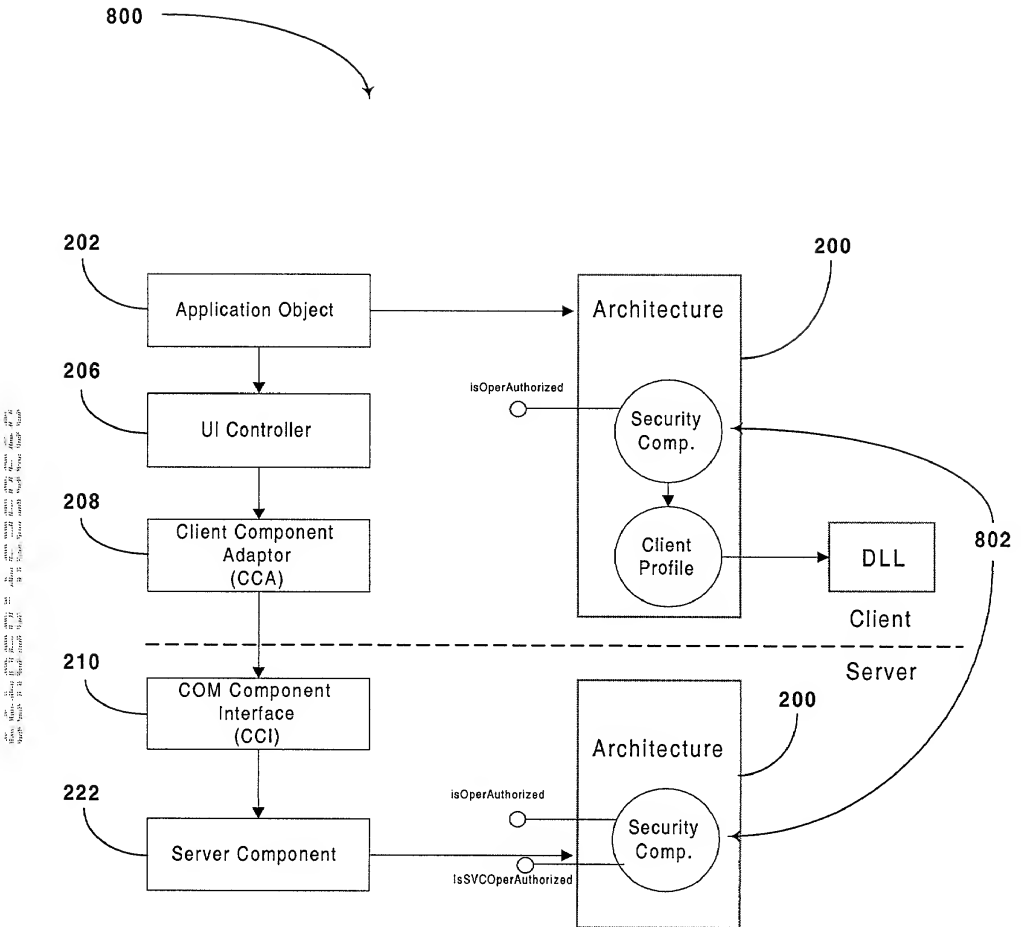


Figure 8

900

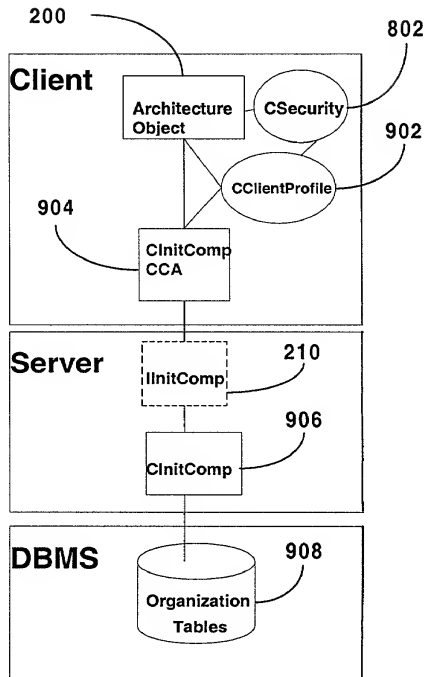


Figure 9

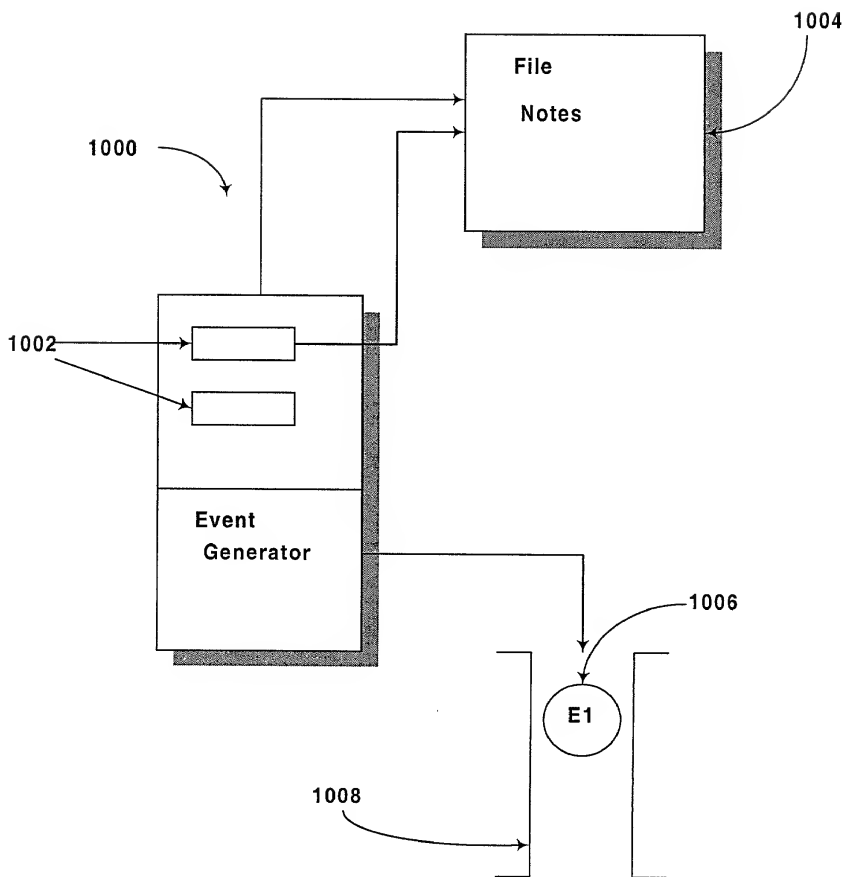


Figure 10

1100

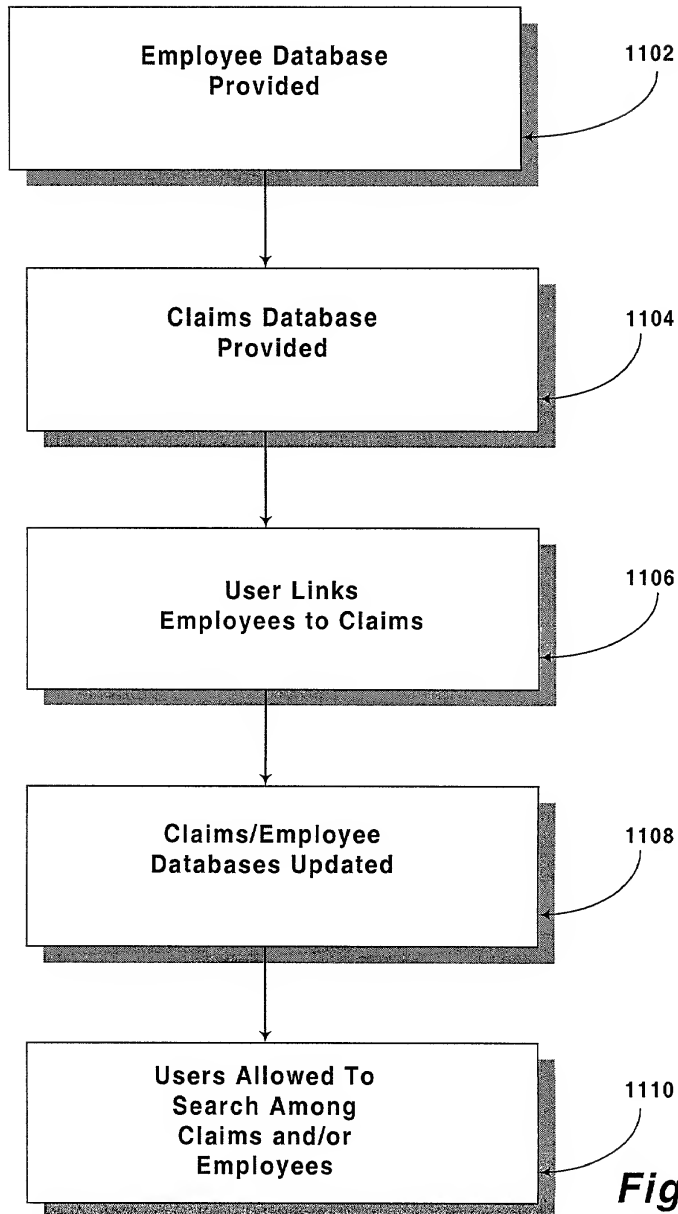


Figure 11

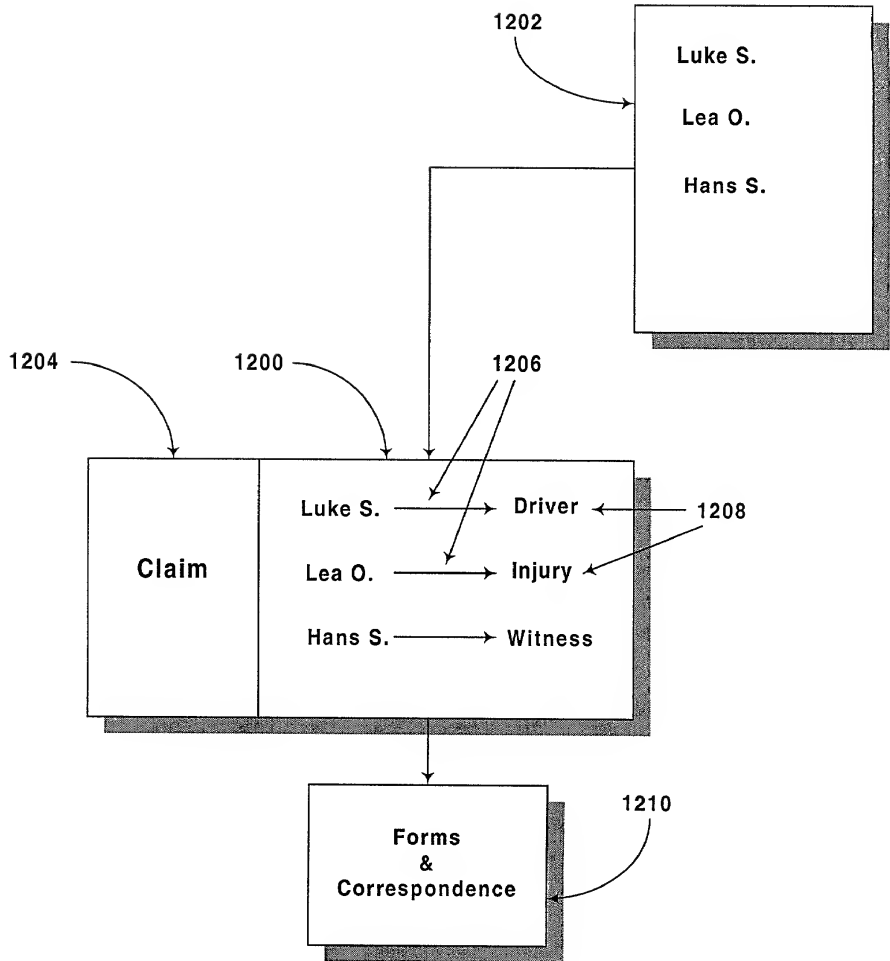


Figure 12

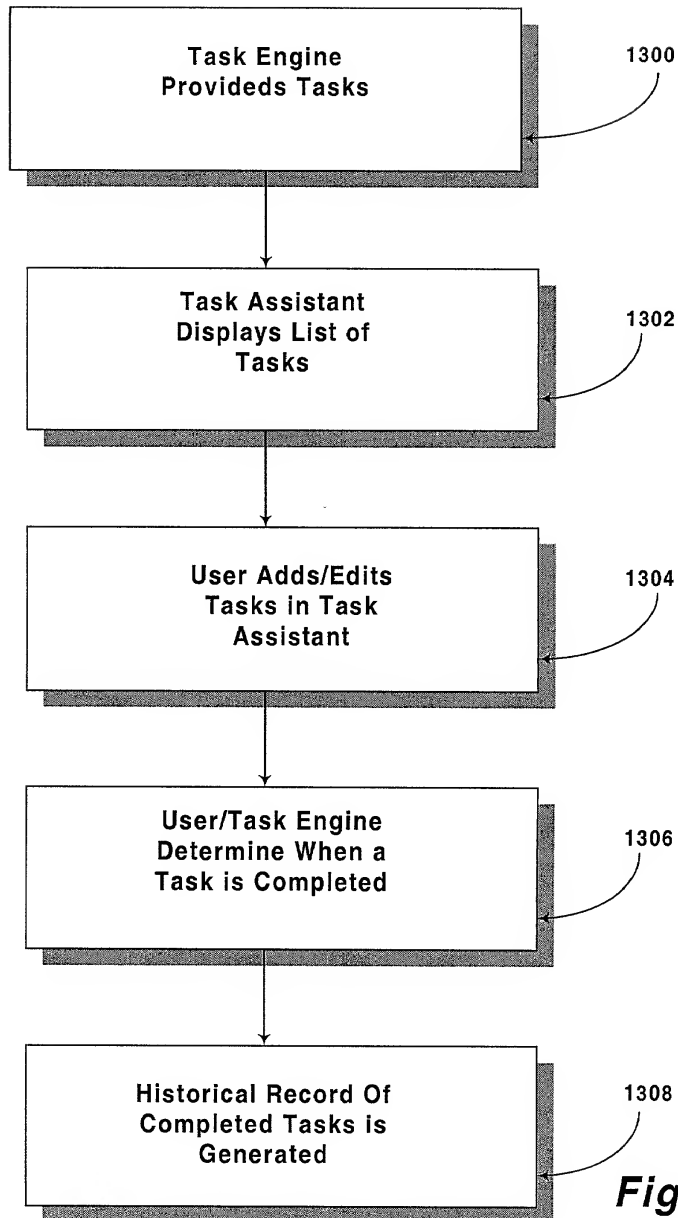


Figure 13

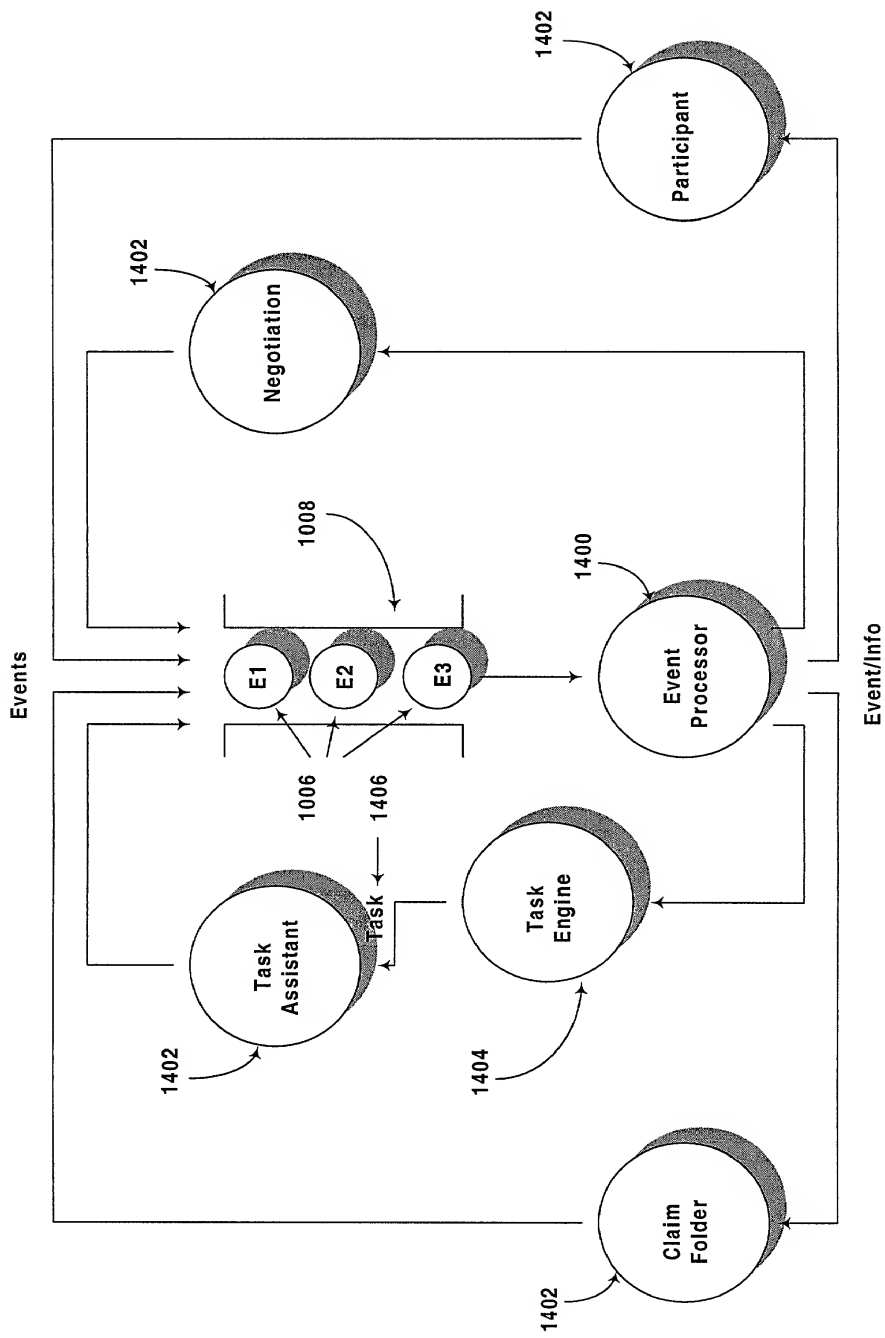


Figure 14

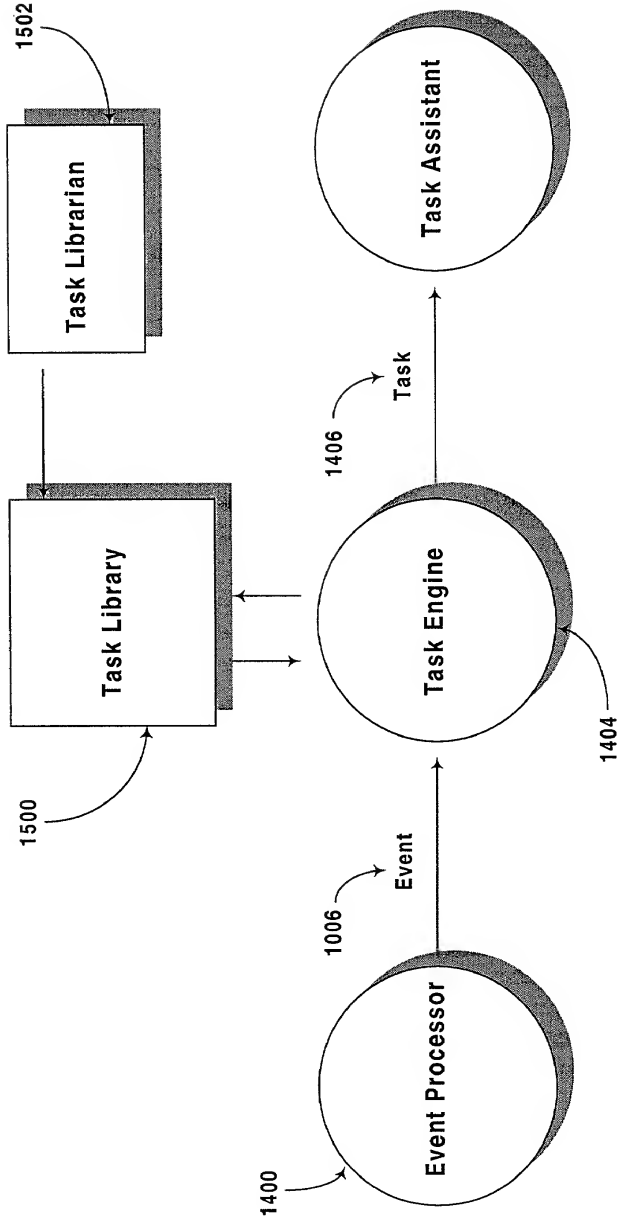


Figure 15